

- Stufenstehtleiter aus Aluminium (beidseitig begehbar).
- Dreifach geweitete und gebördel Stufen-Holm-Verbindung.
- Hochwertige Leiter für profession Ansprüche.



Scharniere aus Gussaluminium.



SICHERHEIT 2 hochfeste 3 cm Gurtbänder als Spreizsicherung.



Best.-Nr.	Stufenzahl	(cm)	(cm)	(cm)	(cm)	(cm)	(kg)	(m ³)	
D-2	3	57	55	257	41	62	4,2	0,04	8028406102571
D-3	4	80	72	280	44	87	5,4	0,06	8028406002505
D-4	5	103	90	303	47	112	6,6	0,08	8028406002512
D-5	6	130	113	230	50,0	141	7,8	0,100	8028406002024
D-6	7	154	125	254	53,5	166	9,0	0,123	8028406002031
D-7	8	176	144	276	56,0	190	10,4	0,145	8028406002048
D-8	9	199	169	299	59,5	215	11,8	0,170	8028406002055
D-9	10	223	184	323	62,0	241	13,6	0,197	8028406002062
D-10	11	249	197	349	65,5	265	14,8	0,249	8028406002079
D-12	13	297	220	397	72,0	315	17,8	0,284	8028406002086






EN131
EUROPEAN NORM




15,5
cm

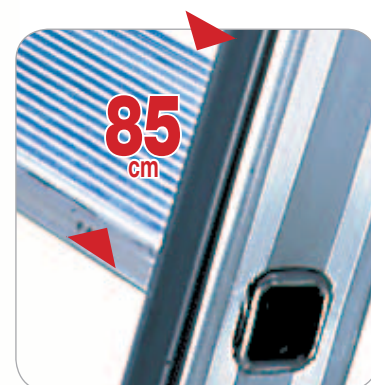

Stufentiefe 85 mm auf beiden Seiten.



Praktischer Eimerhaken.



Untere 5 cm -hohe Gummischeue mit Abstandstück, gegen Einklemmen der Hände.