

BRIKO *plus*

- Aluminium telescopic ladder provided with steel and aluminium die casting hinges.
- It fits itself to all uses.
- Rung/stile connection through six points of robotized welding.




Rung locking pin, made from aluminium die casting and stainless steel
DESIGN FACAL



Steel automatic hinge

Four splits on the stiles and four removable feet fixed through the non-metal plugs. Two splits on the same side hold the rapid widening system.

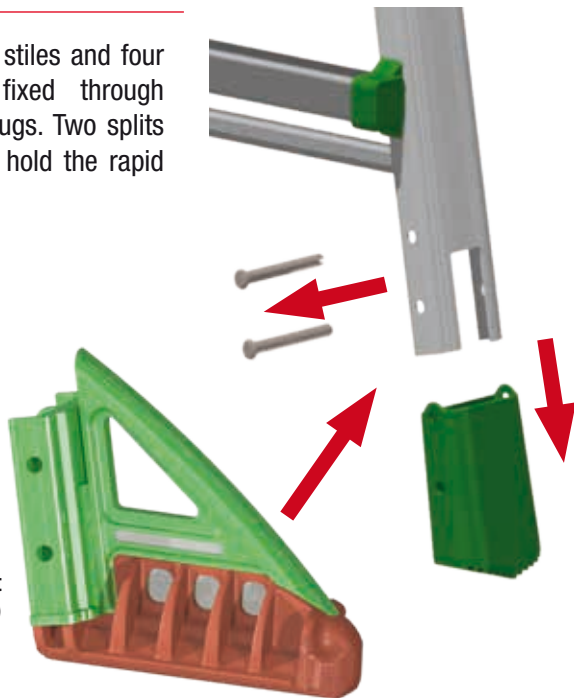

Widening system
Internazional Patent (FACAL project)



	Code	Rungs number	(cm)	(cm)	(cm)	(cm)	(cm)	(cm)	(cm)	(cm)	(kg)	(m ³)	Ean
EN 131-4 EUROPEAN NORM 	BKPL/1	3/3	92	288	143	93	380	260	52,00	-	9,50	0,115	8028406103035
	BKPL/1,5A	3/4	120	344	170	108	435	285	52,00	77,60	11,50	0,150	8028406119579
	BKPL/2A	4/4	120	400	198	122	490	315	62,00	87,50	13,50	0,180	8028406119586



This product is delivered with a PVC wrap film and product leaflet



 **EN131-4**
EUROPEAN NORM
USE OF THE WIDENING
SYSTEM COMPULSORY IN THIS
POSITION




 **EN131-4**
EUROPEAN NORM


150
kg
MAX


81/2008
DECRETO LEGISLATIVO

TÜV Italia
Attestation of Conformity
No.: D 027944 0026



30x30 mm square
non-slip rungs

