



KARGO-ALU-SYSTEM




- Suitable for professional tired vehicles loading/unloading.
- Realized with special aluminium alloys.




FASTENINIG




A- Though ABR locking device (accessory)



B- With Ø 12 mm hole in the middle of landing. You have to drill the loading bed too and lock it with a plug

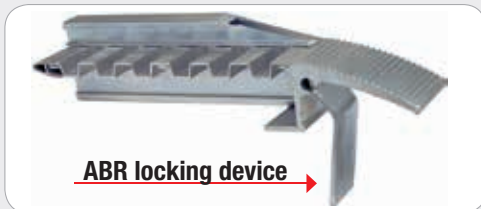

ABR locking device

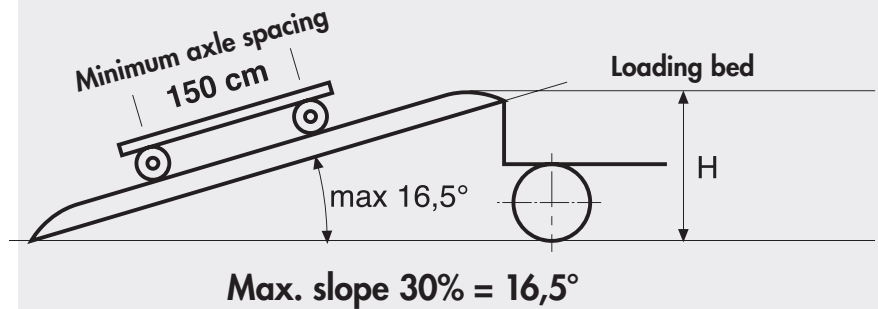

THE RIGHT RAMP

$$\text{RAMP LENGTH}_{\text{cm}} = \frac{\text{Loading bed height (cm)} \times 30 \times 100}{1000}$$



	Code	Loading capacity per pair	(cm)	(cm)	(cm)	(cm)	(cm) h shoulder	Weight (1 piece)	(m ³)	Ean
SERIE LEGGERA	RL30/15	1.600	152	7,5	30	24	-	9,5	0,034	8028406000594
	RL30/20	1.400	197	7,5	30	24	-	12,4	0,044	8028406000600
	RL30/25	1.200	242	7,5	30	24	-	14,9	0,054	8028406000617
	RL30/30	1.000	302	7,5	30	24	-	18,3	0,068	8028406000624
	RL30/35	750	347	7,5	30	24	-	20,8	0,078	8028406000631
	R1/18	2.000	300	10,5	37	30	3,0	24	0,117	8028406000648
	R2/15	1.800	350	10,5	37	30	3,0	28	0,136	8028406000655
	R3/13	1.500	400	10,5	37	30	3,0	32	0,155	8028406000662
	R4/39	4.600	300	13,5	41	32	3,5	36	0,166	8028406000679
	R5/31	3.700	350	13,5	41	32	3,5	41	0,194	8028406000686
	R6/26	3.100	400	13,5	41	32	3,5	47	0,221	8028406000693
	R7/54	6.200	300	15	50	40	2,0	49	0,225	8028406000709
	R8/44	5.200	350	15	50	40	2,0	59	0,263	8028406000716
	R9/36	4.200	400	15	50	40	2,0	65	0,300	8028406000723
	ABR	Steel locking device to fix the ramp (between loading bed and tailboard)								8028406000730



AL/961227944001



Light and easy to handle



Load-bearing abutment



Suitable for
professional
tired vehicles
loading/
unloading

