

# “PRIMA”

- Aluminium rung leaning ladder.
- Possibility to set up articulated feet, thanks to a pre-drilling under the rubber shoes.



plug-in top feet



2012/3099  
2012/3100




S 60080283

## ACCESSORIES



55x120 mm

**Small articulated feet.**  
Steel structure coated with rubber – 25x65 mm stile size



60x180 mm

**Big articulated feet.**  
Steel structure coated with rubber – 25x80 mm stile size




Steel hooks

5 cm high anti-slip shoes, for high safety



Thanks to the rung slope at 68°, feet and legs don't get tired (FACAL Patent)

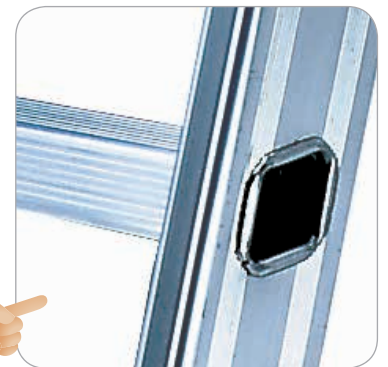

30x30 mm sloped rhomboidal non-slip rungs. That allows an optimal position and comfort during work

45 cm

Code	(mm)	rungs number	(cm)	(cm)	(cm)	(kg)	(m <sup>3</sup> )	Ean
PM 205/S	25x65	6	205	190	295	3,9	0,06	8028406001645
PM 265/S	25x65	8	265	245	355	5,0	0,08	8028406001652
PM 295/S	25x65	9	295	275	385	6,3	0,09	8028406001669
PM 355/S	25x65	11	355	330	445	7,0	0,10	8028406001676
PM 411/S	25x65	13	415	385	500	8,0	0,12	8028406001683
PM 445/S	25x65	14	445	415	535	8,6	0,13	8028406001690
PM 505/S	25x65	16	505	470	595	9,0	0,15	8028406001799
PM 561/S	25x65	18	561	525	650	9,5	0,17	8028406001898
PM 595/S	25x80	19	595	555	685	12,5	0,18	8028406001904
PM 655/S	25x80	21	655	610	745	13,5	0,19	8028406001911
PSP	Small articulated foot 55x120 mm – 25x65 mm stile size							8028406106647
PSG	Big articulated foot 60x180 mm – 25x80 mm stile size							8028406106654
FE-119/A	Steel hook							8028406106579



This product is delivered with a PVC wrap film and product leaflet