



ROLLER

- 2 or 3 sections aluminium rope-operated extension ladder.
- 3 sections: 2 ropes and 2 mechanism.
- Rung-by-rung height adjustment.
- High resistance ropes, with different colours, for a better differentiation.
 - Upper section – rope colour BLACK.
 - Middle section – rope colour WHITE/RED/GREEN.
- Interchangeable ladder shoes and locking fall hook.



Locking fall hook **B**

Locking fall hook **A**

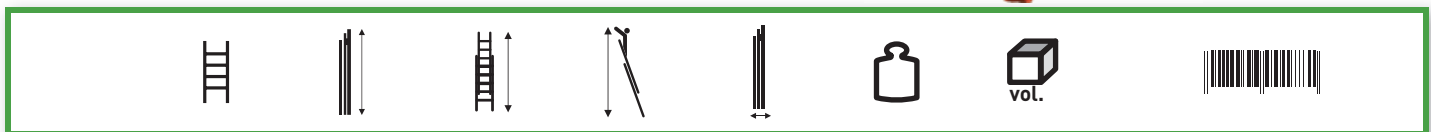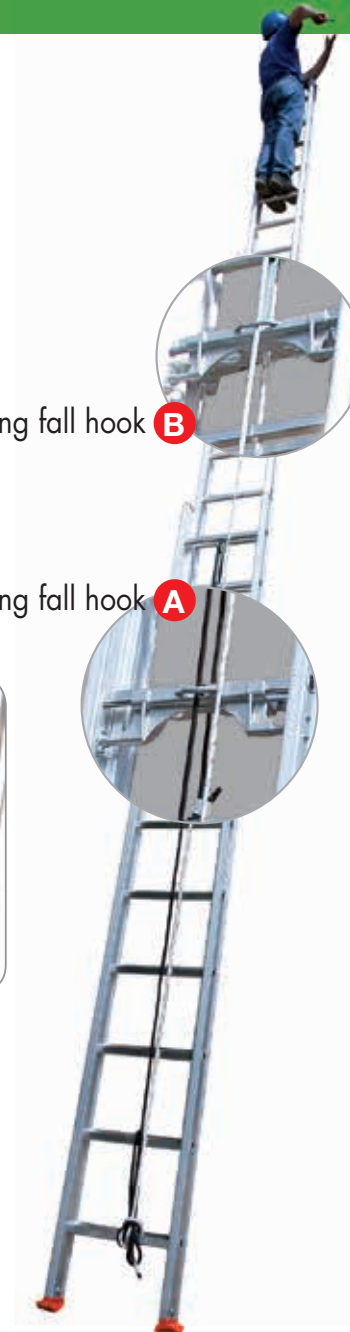

Code	rungs number	(cm)	(cm)	(cm)	(cm)	(kg)	(m ³)	Ean
2 SECTIONS								
R35-2	2x11	353	590	680	17	23,2	0,26	8028406101963
R41-2	2x13	413	711	800	17	27,2	0,30	8028406101970
R44-2	2x14	443	771	860	17	28,8	0,33	8028406101987
R50-2	2x16	503	891	980	17	32,6	0,37	8028406101994
R56-2	2x18	563	1011	1100	17	36,2	0,41	8028406102007
3 SECTIONS								
R35-3	3x11	353	854	944	24	36,8	0,41	8028406102014
R41-3	3x13	413	1034	1124	24	42,6	0,47	8028406102021
R44-3	3x14	443	1064	1154	24	45,6	0,51	8028406102038
R50-3	3x16	503	1244	1334	24	51,2	0,58	8028406102045



Lower section: **45,5 cm**
 Middle section: **40,0 cm**
 Upper section : **35,0 cm**


This product is delivered with a PVC wrap film and product leaflet




Upper section fitted with 100 mm wall wheels




30x30 rhomboidal non-slip rungs with 68° slope

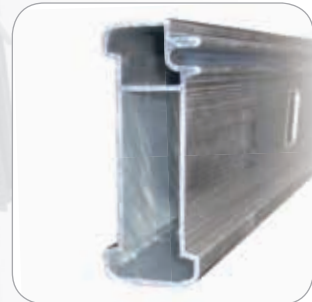

Ribbed profile to avoid bending

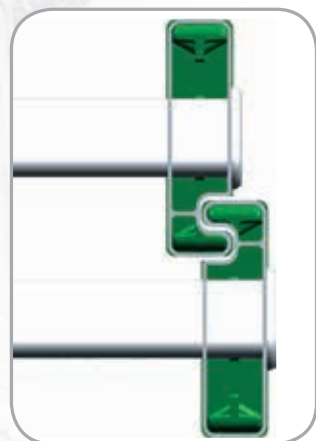

Stiles are equipped with integrated rails to get an optimal sliding. Anti-finger crushing system.

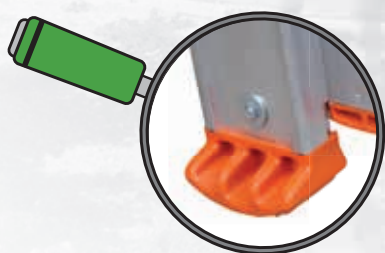

Big anti-slip shaped feet



It means: aromatic polycyclic hydrocarbons plastic parts are heavy metal-free (Zinc, Chrome, and Cadmium)