

“PRIMA”

- Aluminium 2 or 3 sections combination ladder.
- “Overturned V” Telescopic stabiliser bar in standard production. It fits itself to all conditions and it compensates all ground’s drops, even the extremer ones. Ready to use.
- Stairwell ladder.



OUR THECNOLOGIES!


Telescopic stabiliser bar in standard production, always lifted from the ground!





SAFETY:

Structure made from coated steel



Steel sliding brackets coated with nylon for maximum stability. Upper section fitted with 100 mm wall wheels.



Thanks to the rung slope at 68°, feet and legs don't get tired (FACAL Patent)



EN131
EUROPEAN NORM



2001/1677 2001/1676
2001/1674 2001/1678
2001/1672 2001/1675
2001/1673



30x30 mm sloped rhomboidal non-slip rungs



Steel safety hooks fixed to the stiles with stay bolts






Anti unthreading stops (EN 131)




Alum anti-splay bars connected to the stiles through expansion in the rungs' holes.




The solid aluminium hinges hook to each rung to obtain a stairwell ladder, if necessary.

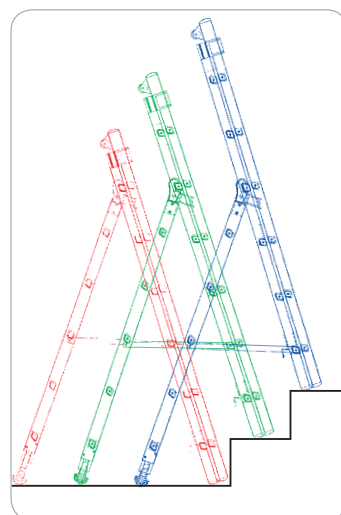

Code	(mm)	rungs number	(cm)	(cm)	(cm)	(cm)	(cm)	(cm)	(cm)	(kg)	(m ³)	Ean
2 SECTIONS												
P210-2	25x65	5 + 6	204	300	194	126	350	310	12	11,0	0,15	8028406001706
P240-2	25x65	6 + 7	234	360	224	140	450	340	12	13,0	0,16	8028406001713
P260-2	25x65	7 + 8	264	420	254	157	510	370	12	14,0	0,18	8028406001720
P290-2	25x80	8 + 9	294	480	284	180	570	400	12	18,0	0,20	8028406001737
P320-2	25x80	9 + 10	324	510	314	204	600	430	14	19,0	0,23	8028406001744
P350-2	25x80	10 + 11	354	570	344	228	660	460	14	21,0	0,25	8028406001751
P380-2	25x90	11 + 12	384	630	374	247	720	490	14	23,0	0,27	8028406001768
3 SECTIONS												
P210-3	25x65	5+6+6	204	420	194	126	510	390	17	16,0	0,20	8028406001805
P240-3	25x65	6+7+7	234	505	224	140	595	410	17	18,5	0,23	8028406001812
P260-3	25x65	7+ 8+8	264	565	254	157	655	440	17	20,5	0,25	8028406001829
P290-3	25x80	8+9+9	294	625	284	180	715	470	17	25,0	0,27	8028406001836
P320-3	25x80	9+10 +10	324	720	314	209	810	500	19	27,0	0,30	8028406001843
P350-3	25x80	10+11+11	354	810	344	233	900	530	19	29,5	0,33	8028406001850
P380-3	25x90	11+12+12	384	870	374	252	960	560	19	33,0	0,36	8028406001867
 P420-3	25x90	12+13+13	424	990	391	257	1080	577	22	37,0	0,46	8028406001874
P450-3	25x90	13+14+14	454	1080	421	278	1170	607	22	37,5	0,50	8028406001881

D.I.G.S.
81/2008



This product is delivered with a PVC wrap film and product leaflet