

VETROPRIMA

- Fibreglass rung leaning ladder.
- Recommended for maintenance works or installations where electrical isolation is required.

150 kg
MAX

EU EN131
EUROPEAN NORM




2012/3101




30x30 mm sloped rhomboidal non-slip rungs. That allows an optimal position and comfort during work. Thanks to the rung slope at 68°, feet and legs don't get tired (FACAL Patent)

ELECTRICALLY INSULATED LEANING LADDERS

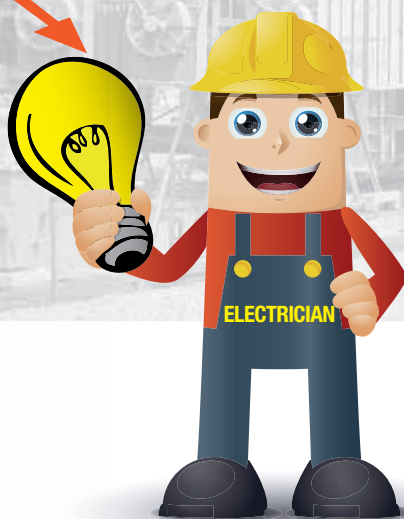

Pultrusion composed by fibreglass and resin stratified tissues

45 cm



Code	(mm)	rungs number	(cm)	(cm)	(cm)	(kg)	(m ³)	Ean
V 205/S	25x68	6	205	190	290	6,5	0,06	8028406080206
V 265/S	25x68	8	265	245	355	8,0	0,08	8028406080169
V 295/S	25x68	9	295	275	385	9,0	0,09	8028406080176
V 355/S	25x68	11	355	330	445	11,0	0,10	8028406080183
V 411/S	25x68	13	411,5	385	500	12,0	0,12	8028406080190

This product is delivered with a PVC wrap film and product leaflet

