





DUMBY-ALU-SYSTEM




AL/961227944001


- Pedestrian or vehicular gangways made of special aluminium alloy.
- They are edgeless and they can be placed side by side to create wide surfaces.
- Non-slip corrugated galvanized platform.
- 80 mm load-bearing abutment.
- Rounded landing end.
- Diagonal cut ashore.
- Outer width: 60 cm.

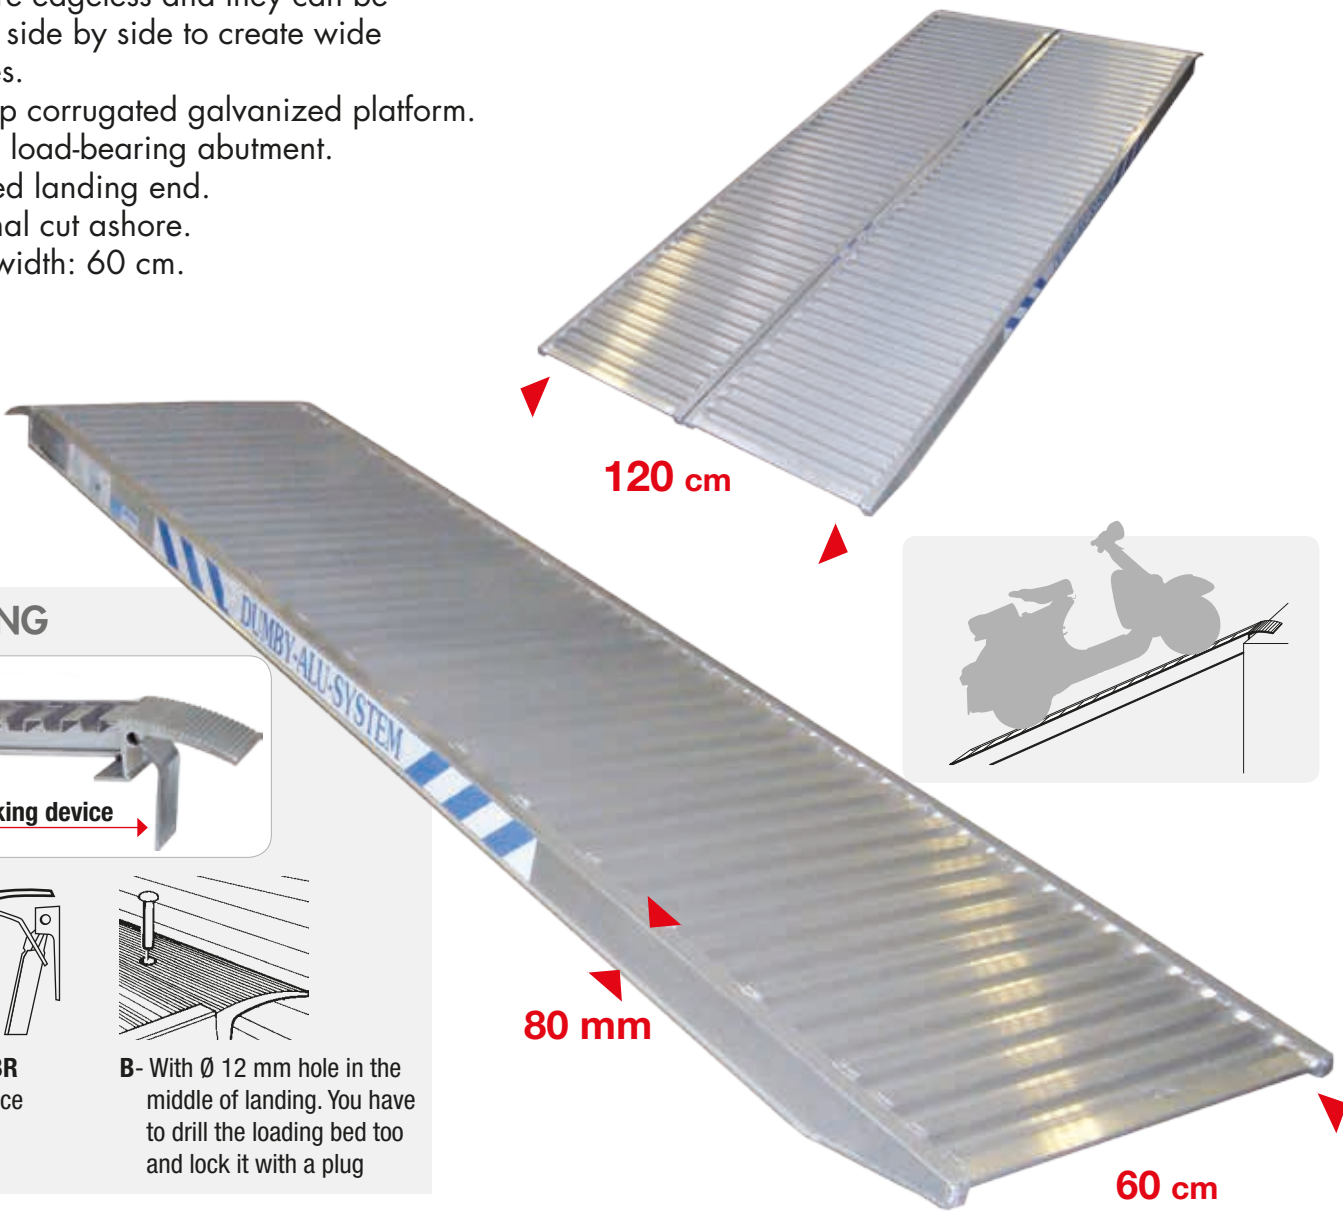

FASTENING



A- Though ABR locking device (accessory)



B- With Ø 12 mm hole in the middle of landing. You have to drill the loading bed too and lock it with a plug



Code	(kg)	(cm)	(kg)	(m <sup>3</sup> )	Ean
PA1/150	750	150	14	0,07	8028406000747
PA2/200	700	200	20	0,10	8028406000754
PA3/250	650	250	25	0,12	8028406000761
PA4/300	550	300	30	0,14	8028406000778
PA5/350	500	350	34	0,17	8028406000785
PA6/400	450	400	38	0,19	8028406000792

Loading capacity referred to max. 30% slope  
Reference angle: 16°

