



The new telescopic ladder extremely solid and easy to use. It's equipped with strong steel hinges combined with special resin coverings, that assure the best sliding during the movements and the total hands' protection. The steel hinges are firmly connected to the stiles through 18 attaching points.




IMPORTANT!!!

2 possible hinge positions::


Free



Locked



Multiple working positions among which the "free hinge position": when the ladder is in A-frame position it can be easily opened or closed

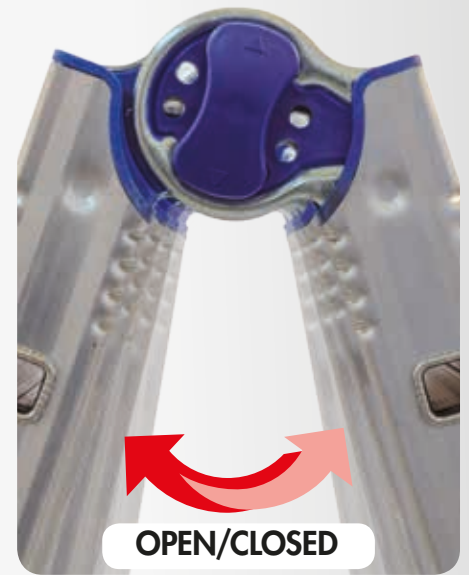

It means: Clear and transparent packaging




It means: aromatic polycyclic hydrocarbons plastic parts are heavy metal- free (Zinc, Chrome, and Cadmium)



	Code	rungs number	(cm)	(cm)	(cm)	(cm)	(cm)	(cm)	(cm)	(kg)	(m ³)	Ean
EN131 EUROPEAN NORM	BB/1	3/3	92	288	143	93	380	260	52	9,50	0,12	8028406110019
	BB/2	4/4	120	400	198	122	490	315	62	12,50	0,18	8028406109990
	BB/3	4/5	148	456	225	137	550	340	62	13,00	0,22	8028406110026
	BB/4	5/5	148	512	252	152	605	370	62	14,00	0,22	8028406110033



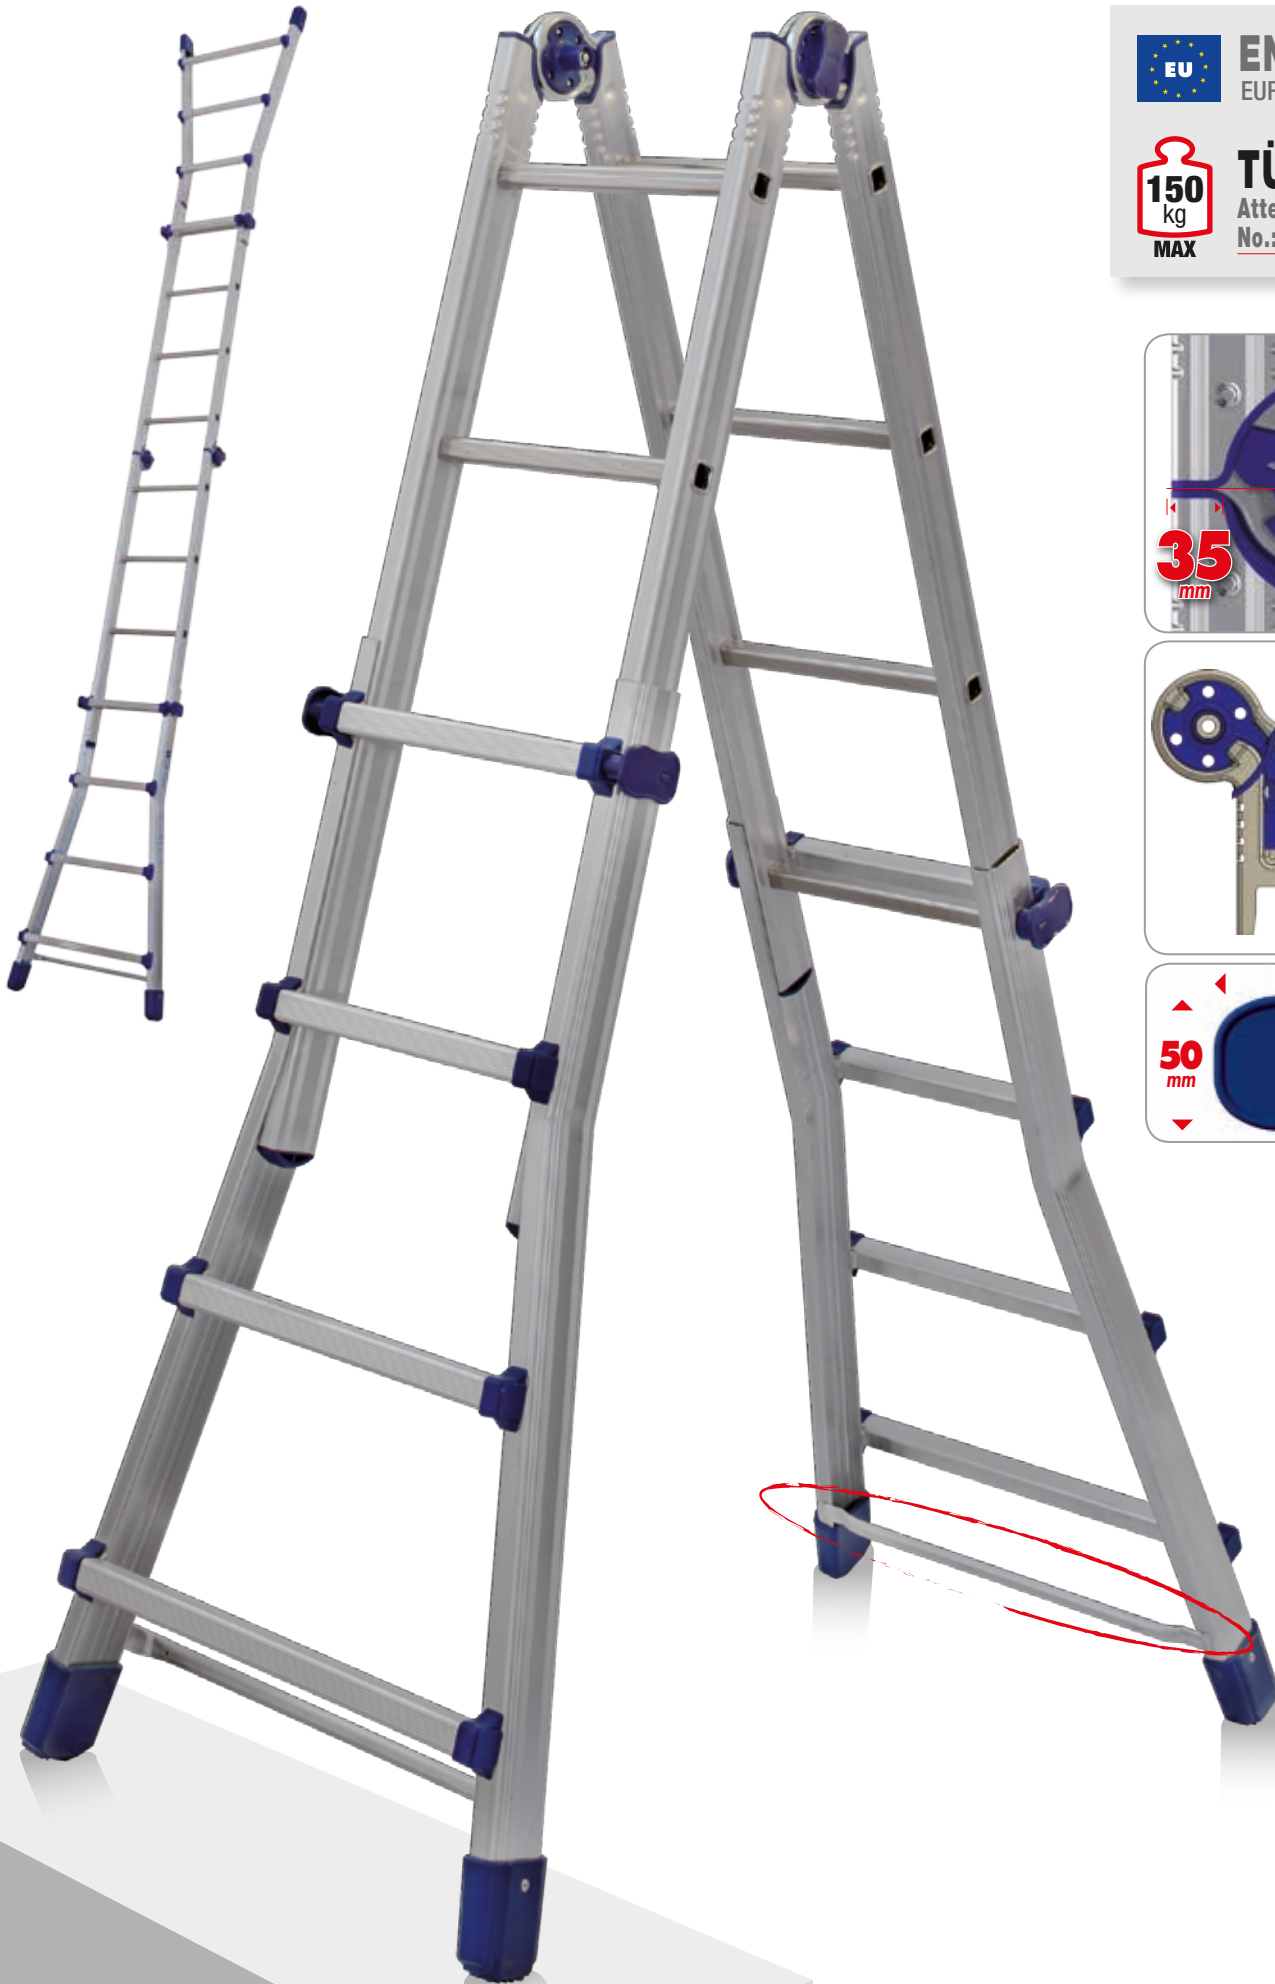

 **EN131-1/2/3/4**
EUROPEAN NORM

 **TÜV Italia**
Attestation of Conformity
No.: VA_MES 16 05 097

