



- Escalera transformable en aluminio con 2 o 3 tramos.
- Peldaños cuadrados 24x24 mm.
- Bisagras en acero.
- L'escalera se adapta a todos los desniveles del terreno.



LAS BISAGRAS DE ACERO SE SUJETAN EN TODOS LOS Peldaños PARA COMPENSAR LOS DESNIVELES.



Ref	[mm]	N. peldaños	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[kg]	[m ³]	Ean
2 TRAMOS													
SL180-2	60-60	2x6	174	286	166	113	376	256	80	10	7,0	0,08	8028406107781
SL200-2	60-60	2x7	202	314	193	131	404	283	80	10	8,5	0,10	8028406107750
SL230-2	60-60	2x8	230	370	220	149	460	310	80	10	10,0	0,11	8028406107835
SL260-2	65-65	2x9	258	426	247	169	516	337	89	11	11,0	0,14	8028406107767
SL290-2	65-65	2x10	286	454	274	186	544	364	89	11	12,5	0,15	8028406107798
SL310-2	80-80	2x11	314	510	301	204	600	391	98	14	17,0	0,17	8028406107774
3 TRAMOS													
SL180-3	60-60-60	3x6	174	342	166	113	488	363	80	15	10,0	0,12	8028406107804
SL200-3	60-60-60	3x7	202	426	193	131	516	404	80	15	12,0	0,14	8028406106715
SL230-3	60-60-60	3x8	230	510	220	149	600	445	89	15	13,5	0,16	8028406107705
SL260-3	60-80-60	3x9	258	594	247	169	684	486	98	17	16,0	0,21	8028406106722
SL290-3	65-80-65	3x10	286	622	274	186	712	527	98	18	18,5	0,25	8028406107811
SL310-3	80-80-80	3x11	314	706	301	204	796	568	118	18	20,5	0,27	8028406106739
SL350-3	80-80-80	3x12	342	818	328	225	908	609	118	20	23,5	0,33	8028406107828



1º tramo: 47,8 cm
2º tramo: 41,4 cm
3º tramo: 34,5 cm

COLORES:

Plástico

RAL 5002

Seguridad

RAL 3000

150
kg
MAX



EN131
EUROPEAN NORM




ACTUALIZACIÓN NORMA 1/18



24x24
mm

Peldaños
cuadrados

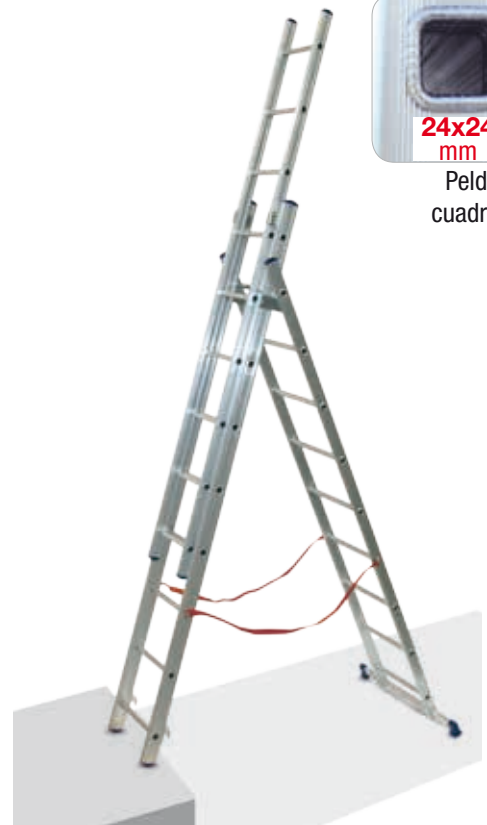

FRENOS
ANTIDESLIZAMIENTO