


# ROLLER

- 2 or 3 sections aluminium rope-operated extension ladder.
- 3 sections: 2 ropes and 2 mechanism.
- Rung-by-rung height adjustment.
- High resistance ropes, with different colours, for a better differentiation.
  - Upper section – rope colour BLACK.
  - Middle section – rope colour WHITE/RED/GREEN.
- Interchangeable ladder shoes and locking fall hook.

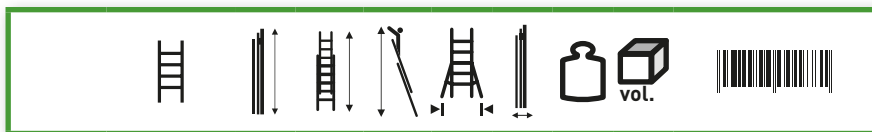

WITH STABILISERS FROM PRODUCTION 2018

Code	rungs number	(cm)	(cm)	(cm)	(cm)	(cm)	(kg)	(m <sup>3</sup> )		
<b>2 SECTIONS</b>										
R35-2S	11+11	353	590	680	185	17	26,6	0,27	8028406111900	
R41-2S	13+13	413	711	800	185	17	30,6	0,32	8028406111917	
R44-2S	14+14	443	771	860	185	17	32,2	0,34	8028406111924	
R50-2S	16+16	503	891	980	185	17	36,0	0,39	8028406111931	
R56-2S	18+18	563	1011	1100	185	17	39,6	0,44	8028406111948	
<b>3 SECTIONS</b>										
R35-3S	11+11+11	353	854	944	185	24	40,2	0,39	8028406111955	
R41-3S	13+13+13	413	1034	1124	185	24	46,0	0,45	8028406111962	
R44-3S	14+14+14	443	1064	1154	185	24	49,0	0,48	8028406111979	
R50-3S	16+16+16	503	1244	1334	185	24	54,6	0,55	8028406111986	
R-STAB	stabiliser equipped with alum die-casting fork									8028406112570

*This product is delivered with a PVC wrap film and product leaflet*



Lower section: 45,5 cm  
 Middle section: 40,0 cm  
 Upper section: 35,0 cm



Upper section fitted with 100 mm wall wheels

150 kg MAX




EN131 EUROPEAN NORM



UPDATE NEW NORM EN131: 01/18




30x30 rhomboidal non-slip rungs with 68° slope




Ribbed profile to avoid bending



Alum die-casting fork

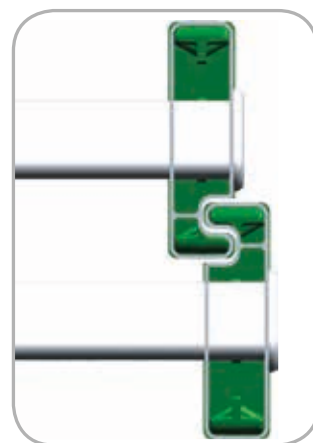

Stiles are equipped with integrated rails to get an optimal sliding. Anti-finger crushing system.

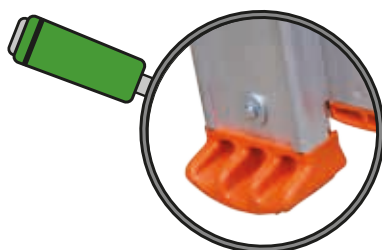

Big anti-slip shaped feet

640 mm



It means: aromatic polycyclic hydrocarbons plastic parts are heavy metal-free (Zinc, Chrome, and Cadmium)