FACAL

The Italian Ladders

CATALOGUE

We present you our new 2013 catalogue.
Thanks to its systematic structure you will have an optimal overview over our different products' lines.
We show you the innovations about our new catalogue:

- New products and new lines are present.
- FACAL products' range is now divided in different categories, one to each distribution channel.
- Technical features and pictograms are well-pointed out, and you can easily find the information you need thanks to the methodical structure of the catalogue's pages.
- Every product has its own EAN code.
- The most important information about our products are stressed by our mascot **Cicero** .
- The certifications are always top right side page.
- A lot of products are TÜV-GS certified.
  TÜV-GS mark is known all over the world and it's a symbol of product's quality.
- At the end of the catalogue there's a complete section dedicated to spare parts, which are now supported by pictures and codes.
- Our engagement in the research and in the use of eco-friendly materials is now represented with specific pictograms that you can also find on our products. FACAL strengthens its leadership in ladders and scaffolding branch production thanks to important technical and structural investments. This allows us to offer you now our traditional professional range together with semipro and DYI items, which are all manufactured in our factory with the same philosophy and industrial style that characterize us since three generations.
- All the products are manufactured according to our specific standards and they are gathered in what we call "Company System" concept. This concerns all departments such as production, sales, advertising & marketing. Themes like environment, staff training and follow-up, process streamlining are for us very important.Therefore we stay optimistic about future and we are glad to present you our new 2013 catalogue.

PROGETTO SISTEMA AZIENDA Full System FACAL®

It means: "Company system"project

INFORMATION

- FACAL is an Italian family-run business placed in Marmirolo – Lombardy. It's specialized in access equipments manufacturing, i.e. ladders and scaffolding made from aluminium, iron and fibreglass.
- Short course in decision making.
- No investors and no external capital.
- Market sharing:



60% ITALY

40% FOREIGN COUNTRIES (Europe and extra Europe)

COMPANY STRUCTURE AND PRODUCTION

- Covered production surface of own property: 18.000 square meters. Total area: about 40.000 square meters.
- 75 operators.
- Own projecting department.
- Raw materials stock warehouse : more than 450 tons of aluminium avalaible.
- Efficient and upgraded production equipments. Qualified internal tooling that allows the construction of specific machineries, the creation of prototypes, the tests and the constant and efficient plants maintenance.
- Facal has a wide range of deposited international patents.
- Own property trucks for deliveries all over Italy.
- Reliable carriers for export shipments.

Hello! I'm Cicero. We will consult together the new catalogue 2013. I will help you to understand the technical details and features of the products and their position on the market distribution. The assortment is divided in three different products categories:

SUPER PRO 600 RANGE	GREEN
PRO 300 RANGE	ORANGE
100 RANGE	BLUE

Master range

- Industrial / heavy-duty
- Suitable for intensive and daily use
- High quality items
- Innovative manufacturing features: 30x30 mm rhomboidal rungs, telescopic stabiliser bars, alum anti-splay bars, anti friction nylon details, aluminium die casting hinges and platforms.
- **10-year warranty**

Professional range

- Trade
- Suitable for regular use
- Innovative manufacturing features: 30x30 mm square rungs, fixed bars, strong resistant straps, aluminium die casting hinges
- **5-year warranty**

DIY range

- Private / homeowners
- Suitable for domestic use only
- High quality: 24x24 mm square rungs
- Easy to use
- Best quality/price ratio
- **2 / 5-year warranty**

SUPER PRIMA	GENIA	STILO
DAMA	CONICA	PITTORE
ROLLER	HOBBY6 - HOBBY2	PINNA
EUROBRIKO - BRIKO PLUS	MASTER PRO	PINNA CLIC / PINNA CLIC•CLAC
QUADRA	AGRI	PENNY
DUPLA	PLATEA	SPECIAL PIEGO
PROFESSIONAL 1	CASTÀ	EURO DOMUS
STRUMENTA	ALUMITO	COLORETTE
S15/1 - S15/2	ESTRO	TINTO - TONTO
CASTIGLIA	TANO	FIERO
BINARY	TAGLIALEGNA	PONY
DIVA	SPAZIO	MITO
ALFA		
SECURITY SYSTEM		
DOGE65 - DOGE80		
CAPO1 - CAPO2 - CAPO3		
PIEGO		
TECNICI		
CAVALLETTI ALLUMINIO		
KARGO-ALU-SYSTEM		
DUMBY-ALU-SYSTEM		

INDEX

SUPER PRO 600 RANGE | PRO 300 RANGE | 100 RANGE

LEANING LADDERS

6-7 | 8 | 9 | 10 | 11

COMBINATION LADDERS

14-16 | 18-19 | 20-21 | 22-23

ROPE-OPERATED EXTENSION LADDERS / EXTENSION LADDERS

26-27 | 28 | 29 | 30

TELESCOPIC LADDERS / MULTIPURPOSE LADDERS

32-33 | 34-35 | 36-37 | 38

STEPLADDERS / SPECIAL LADDERS

40-41 | 43 | 44-45 | 46-47 | 48-49

50-51 | 52 | 53 | 54

WAREHOUSE STEPS / SHELF LADDERS / WORK PLATFORM BRIDGING PLATFORM / FOLDING PLATFORM

56-57 | 58-59 | 60-63 | 64-65

66-67 | 68-69 | 70

VERTICAL LADDER WITH SAFETY CAGE

72-79

ALUMINIUM ACCESS TOWERS / SCAFFOLDINGS

82-89 | 90-101 | 102 | 104-105 | 106 | 107 | 108-109 | 110-111 | 112 | 113

STEEL ACCESS TOWERS

116-117 | 118 | 119 | 120

STEP STOOLS / SAWHORSES

122 | 123 | 124 | 125

HOUSEHOLD STEPLADDERS

128-129 | 130 | 131

LOADING RAMPS

134-136

STANDS AND GRAPHICS

138-146

ACCESSORIES AND SPARE PARTS

148-163

Safety and norms 12
Safety and Pictograms 17
Ladders guide 24
Scaffoldings guide..... 80

LEANING LADDERS

COMBINATION LADDERS

ROPE-OPERATED EXTENSION LADDERS / EXTENSION LADDERS

TELESCOPIC LADDERS / MULTIPURPOSE LADDERS

STEPLADDERS / DOUBLE-SIDED STEPLADDERS / SPECIAL LADDERS

WAREHOUSE STEPS / SHELF LADDERS / WORK PLATFORMS / BRIDGING PLATFORMS / FOLDING WORK PLATFORMS

VERTICAL LADDER WITH SAFETY CAGE

ALUMINIUM ACCESS TOWERS / SCAFFOLDINGS

STEEL ACCESS TOWERS / SCAFFOLDINGS

STEP STOOLS / SAWHORSES

HOUSEHOLD STEPLADDERS

LOADING RAMPS / GANGWAYS

STANDS & GRAPHICS

ACCESSORIES AND SPARE PARTS

10-YEAR WARRANTY

MADE IN ITALY 100%

SUPER PRO 600 RANGE

"PRIMA"

- Aluminium rung leaning ladder.
- Possibility to set up articulated feet, thanks to a pre-drilling under the rubber shoes.

plug-in top feet

150 kg MAX

EU EN131 EUROPEAN NORM

POLITECNICO MILANO 2012/3099 2012/3100

www.tuv.com TÜVRheinland ID-1000000000 GS geprüfte Sicherheit

S 60080283

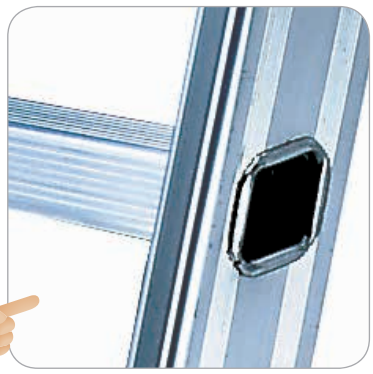

30x30 mm sloped rhomboidal non-slip rungs. That allows an optimal position and comfort during work

ACCESSORIES

55x120 mm

Small articulated feet. Steel structure coated with rubber – 25x65 mm stile size

60x180 mm

Big articulated feet. Steel structure coated with rubber – 25x80 mm stile size

Steel hooks

5 cm high anti-slip shoes, for high safety

Code	(mm)	rungs number	(cm)	(cm)	(cm)	(kg)	(m³)	Ean
PM 205/S	25x65	6	205	190	295	3,9	0,06	8028406001645
PM 265/S	25x65	8	265	245	355	5,0	0,08	8028406001652
PM 295/S	25x65	9	295	275	385	6,3	0,09	8028406001669
PM 355/S	25x65	11	355	330	445	7,0	0,10	8028406001676
PM 411/S	25x65	13	415	385	500	8,0	0,12	8028406001683
PM 445/S	25x65	14	445	415	535	8,6	0,13	8028406001690
PM 505/S	25x65	16	505	470	595	9,0	0,15	8028406001799
PM 561/S	25x65	18	561	525	650	9,5	0,17	8028406001898
PM 595/S	25x80	19	595	555	685	12,5	0,18	8028406001904
PM 655/S	25x80	21	655	610	745	13,5	0,19	8028406001911

PSP	Small articulated foot 55x120 mm – 25x65 mm stile size	8028406106647
PSG	Big articulated foot 60x180 mm – 25x80 mm stile size	8028406106654
FE-119/A	Steel hook	8028406106579

This product is delivered with a PVC wrap film and product leaflet

10-YEAR WARRANTY

MADE IN ITALY 100%

SUPER PRO 600 RANGE

"PRIMA"

- Aluminium treadsl eaning ladder.
- Articulated rubber feet in standard production.
- Especially recommended for interior works and as shelf-ladder.

Plug-in top feet.

150 kg MAX

EN131 EUROPEAN NORM

2012/3102
2012/3103

S 60080283

Stile/treads connection through double expansion mechanism

85 mm non-slip treads

ACCESSORY:
Steel hooks

Articulated feet. Steel structure coated with anti-slip rubber as standard

Code	(mm)	treads number	(cm)	(cm)	(cm)	(kg)	(m³) vol.	Ean
PM 205/L	25x65	6	205	190	295	4,3	0,07	8028406001928
PM 265/L	25x65	8	265	245	355	5,5	0,09	8028406001935
PM 295/L	25x65	9	295	275	385	7,0	0,10	8028406001942
PM 355/L	25x65	11	355	330	445	7,7	0,11	8028406001959
PM 411/L	25x65	13	415	385	500	8,8	0,13	8028406001966
PM 445/L	25x65	14	445	415	535	9,4	0,14	8028406001973
PM 505/L	25x65	16	505	470	595	11,8	0,16	8028406001980
PM 561/L	25x65	18	561	525	650	12,6	0,18	8028406001997
PM 595/L	25x80	19	595	555	685	13,5	0,19	8028406002000
PM 655/L	25x80	21	655	610	745	14,6	0,20	8028406002017
FE-119/A	Steel hook							8028406106579

This product is delivered with a PVC wrap film and product leaflet

5-YEAR WARRANTY

MADE IN ITALY 100%

PRO 300 RANGE

GENIA

- Aluminium rung leaning ladder.

Plug-in top feet

150 kg MAX

EU EN131 EUROPEAN NORM

www.tuv.com TÜVRheinland ID.1000000000 GS geprüfte Sicherheit

S 60080283

ACCESSORY:
Steel hooks

30X30 mm square non-slip rungs, strongly fixed to the stiles

I ASSURE A BEST QUALITY/ PRICE RATIO

5 cm high non-slip shoes, for high safety

Code	(mm)	rungs number	(cm)	(cm)	(cm)	(kg)	(m^3)	Ean
GS200	25x65	6	200	190	295	4,9	0,05	8028406101642
GS250	25x65	8	265	245	355	5,2	0,07	8028406101659
GS300	25x65	9	295	275	385	5,5	0,08	8028406101666
GS350	25x65	11	355	330	445	6,6	0,09	8028406101673
GS400	25x65	13	411	385	500	7,5	0,10	8028406101680
GS450	25x65	14	445	415	535	8,5	0,11	8028406101697
GS500	25x65	16	505	470	595	9,4	0,13	8028406101796
GS550	25X65	18	565	525	650	10,8	0,14	8028406106562
FE-119/A	Steel hook							8028406106579

RANGE 100

5-YEAR WARRENTY

MADE IN ITALY 100%

EURO STILO

- Aluminium rung leaning ladder.
- At the bottom: big ladder shoes fixed by rivets.



Plug-in top feet

150 kg MAX

EU EN131 EUROPEAN NORM

www.tuv.com TÜVRheinland ID:1000000000 GS geprüfte Sicherheit

S 60080254



24x24 mm square rungs

ACCESSORY: steel hooks

I ASSURE A BEST PRICE/ QUALITY RATIO

Crimped and 2 times expanded stiles/rungs connection

5 cm high non-slip shoes, for high safety

Cod.	(mm)	rungs number	(cm)	(cm)	(cm)	(kg)	(m^3)	Ean
SL-07	24x50	7	216	205	306	2,8	0,037	8028406106418
SL-08	24x50	8	246	230	336	3,1	0,042	8028406106852
SL-09	24x50	9	276	257	366	3,4	0,047	8028406106425
SL-10	24x60	10	306	286	396	4,4	0,052	8028406106432
SL-11	24x60	11	336	302	426	4,8	0,057	8028406106449
SL-12	24x60	12	366	338	456	5,4	0,062	8028406106869
SL-13	24x60	13	396	370	486	5,8	0,068	8028406106456
FE-119/A	Steel hook							8028406106579

Slope min.65° max.75°

2-YEAR WARRANTY

MADE IN ITALY 100%

SUPER PRO 600 RANGE

VETROPRIMA

150 kg MAX

EN131 EUROPEAN NORM

2012/3101

- Fibreglass rung leaning ladder.
- Recommended for maintenance works or installations where electrical isolation is required.

30x30 mm sloped rhomboidal non-slip rungs.
That allows an optimal position and comfort during work.
Thanks to the rung slope at 68°, feet and legs don't get tired (FACAL Patent)

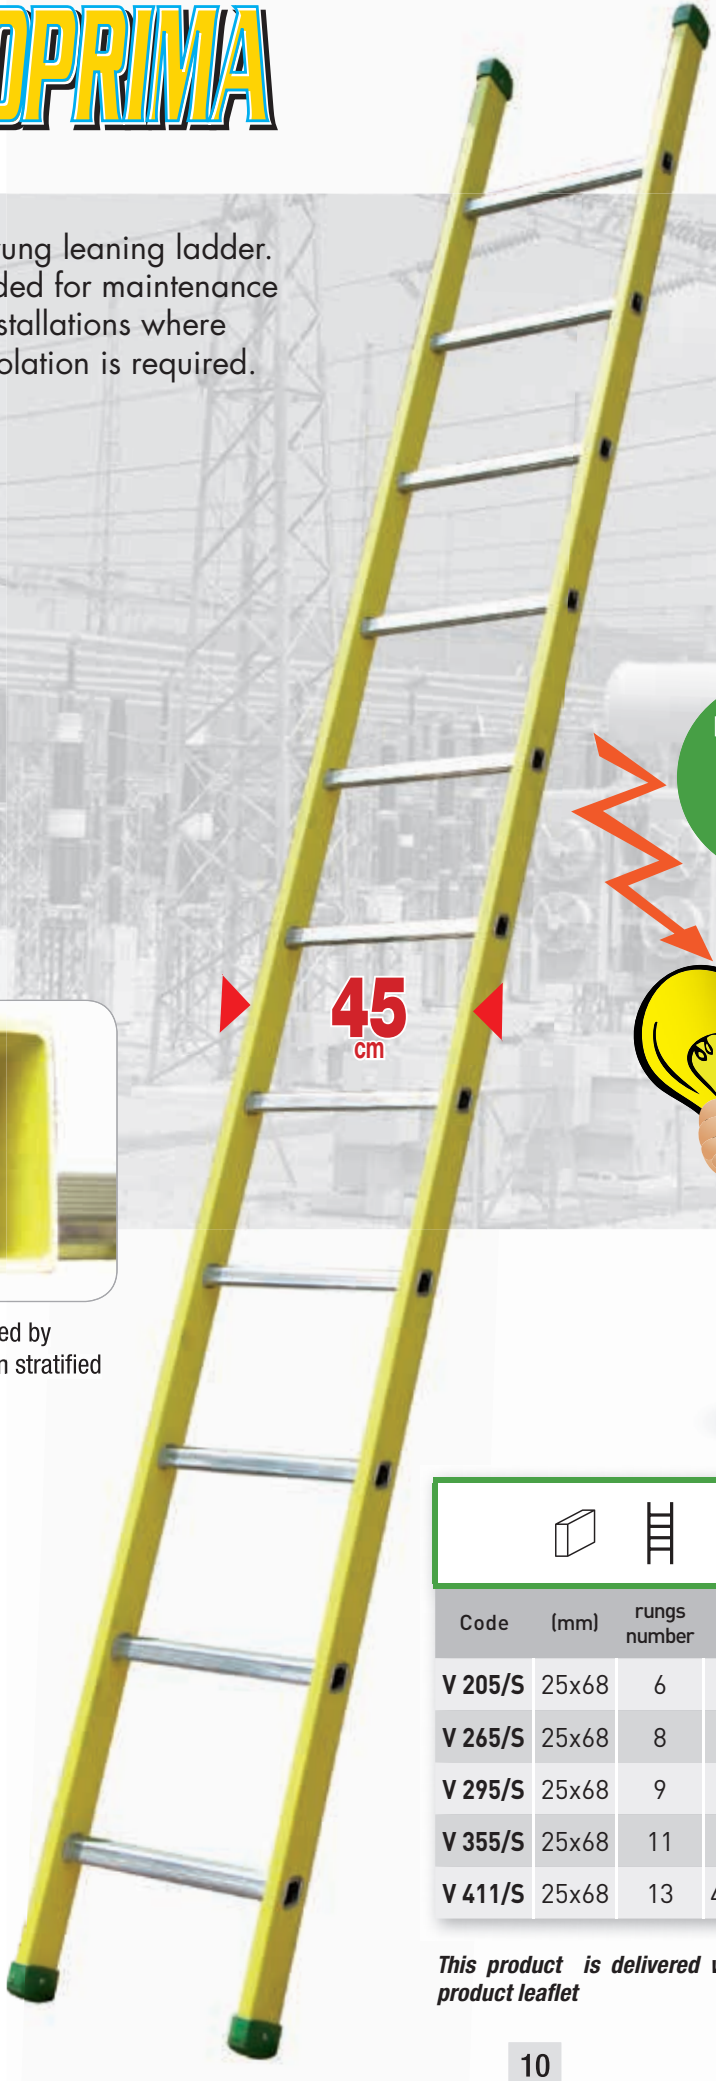

Pultrusion composed by fibreglass and resin stratified tissues

Code	(mm)	rungs number	(cm)	(cm)	(cm)	(kg)	(m^3)	Ean
V 205/S	25x68	6	205	190	290	6,5	0,06	8028406080206
V 265/S	25x68	8	265	245	355	8,0	0,08	8028406080169
V 295/S	25x68	9	295	275	385	9,0	0,09	8028406080176
V 355/S	25x68	11	355	330	445	11,0	0,10	8028406080183
V 411/S	25x68	13	411,5	385	500	12,0	0,12	8028406080190

This product is delivered with a PVC wrap film and product leaflet

Slope max.60°

cm 45

5 YEAR WARRANTY

MADE IN ITALY 100%

PRO 300 RANGE

CONICA

- Aluminium rung leaning ladder.
- Trapezoid sloped rungs.
- Suitable for the fruit gathering and plants maintenance.



- Ribbed stiles with rounded edges.

30 mm

65 mm

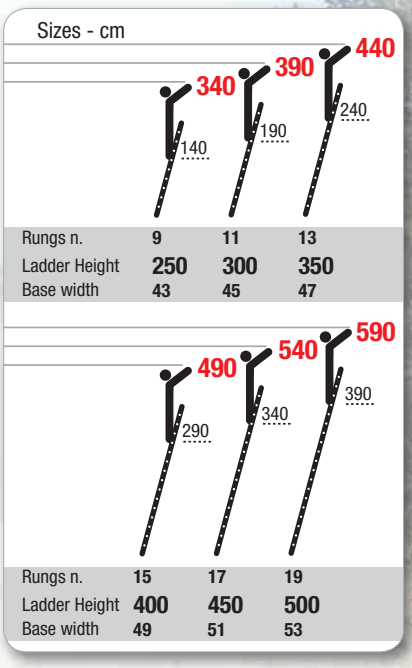

150 kg MAX

EN131 EUROPEAN NORM

Z1A 1305 27944

Crimped and welded trapezoid rungs

Additional welding on the rung back

Code	(kg)	(m³)	Ean
CN-25	4,80	0,06	8028406108030
CN-30	6,20	0,07	8028406108047
CN-35	7,30	0,09	8028406108054
CN-40	8,60	0,10	8028406108061
CN-45	9,80	0,12	8028406108078
CN-50	11,50	0,14	8028406108085

This product is delivered with a PVC wrap film and product leaflet



10 cm rubber shoe

SAFETY AT FIRST

Certifications labels come from official European institutes, not connected to the manufacturer. Products are periodically subjected to inspections to guarantee quality and compliance.

PROGETTO SISTEMA AZIENDA Full System FACAL®

It means: “Company system”project

OUR PARTNERS

EN 131 Norm - FACAL Symbol = EN131 EUROPEAN NORM

Maximum load **150 KG** - FACAL Symbol = 150 kg MAX - Minimum allowed thickness: ALUMINIUM **1,2 mm** - IRON **1,0 mm**

OUR CERTIFICATIONS

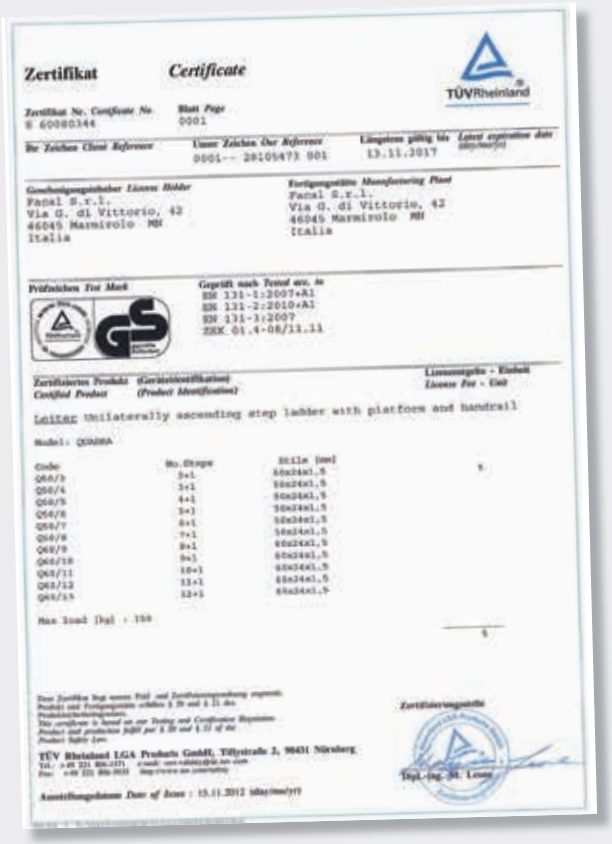

EN131 norm is not a European guideline, therefore the use of the CE label is not allowed.

LEANING LADDERS

COMBINATION LADDERS

ROPE-OPERATED EXTENSION LADDERS / EXTENSION LADDERS

TELESCOPIC LADDERS / MULTIPURPOSE LADDERS

STEPLADDERS / DOUBLE-SIDED STEPLADDERS / SPECIAL LADDERS

WAREHOUSE STEPS / SHELF LADDERS / WORK PLATFORMS / BRIDGING PLATFORMS / FOLDING WORK PLATFORMS

VERTICAL LADDER WITH SAFETY CAGE

ALUMINIUM ACCESS TOWERS / SCAFFOLDINGS

STEEL ACCESS TOWERS / SCAFFOLDINGS

STEP STOOLS / SAWHORSES

HOUSEHOLD STEPLADDERS

LOADING RAMPS / GANGWAYS

STANDS & GRAPHICS

ACCESSORIES AND SPARE PARTS

"PRIMA"

- Aluminium 2 or 3 sections combination ladder.
- "Overturned V" Telescopic stabiliser bar in standard production. It fits itself to all conditions and it compensates all ground's drops, even the extremer ones. Ready to use.
- Stairwell ladder.

INTENSIVE USE

10-YEAR WARRANTY

MADE IN ITALY 100%

SUPER PRO 600 RANGE

150 kg MAX

EU EN131 EUROPEAN NORM

POLITECNICO MILANO

2001/1677 2001/1676
2001/1674 2001/1678
2001/1672 2001/1675
2001/1673

SAFETY DEVICES

SAFETY:
Structure made from coated steel

Steel sliding brackets coated with nylon for maximum stability. Upper section fitted with 100 mm wall wheels.

30x30 mm sloped rhomboidal non-slip rungs

Steel safety hooks fixed to the stiles with stay bolts

Anti unthreading stops (EN 131)

Alum anti-splay bars connected to the stiles through expansion in the rungs' holes.

SUPER PRO 600 RANGE

The solid aluminium hinges hook to each rung to obtain a stairwell ladder, if necessary.

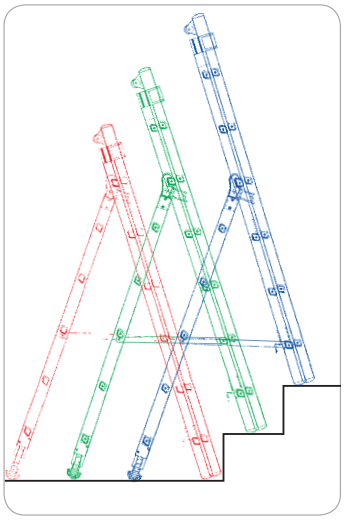



	Code	(mm)	rungs number	(cm)	(cm)	(cm)	(cm)	(cm)	(cm)	(cm)	(kg)	(m³)	Ean
							2 SECTIONS						
	P210-2	25x65	5 + 6	204	300	194	126	350	310	12	11,0	0,15	8028406001706
	P240-2	25x65	6 + 7	234	360	224	140	450	340	12	13,0	0,16	8028406001713
	P260-2	25x65	7 + 8	264	420	254	157	510	370	12	14,0	0,18	8028406001720
	P290-2	25x80	8 + 9	294	480	284	180	570	400	12	18,0	0,20	8028406001737
	P320-2	25x80	9 + 10	324	510	314	204	600	430	14	19,0	0,23	8028406001744
	P350-2	25x80	10 + 11	354	570	344	228	660	460	14	21,0	0,25	8028406001751
	P380-2	25x90	11 + 12	384	630	374	247	720	490	14	23,0	0,27	8028406001768
							3 SECTIONS						
	P210-3	25x65	5+6+6	204	420	194	126	510	390	17	16,0	0,20	8028406001805
	P240-3	25x65	6+7+7	234	505	224	140	595	410	17	18,5	0,23	8028406001812
	P260-3	25x65	7+ 8+8	264	565	254	157	655	440	17	20,5	0,25	8028406001829
	P290-3	25x80	8+9+9	294	625	284	180	715	470	17	25,0	0,27	8028406001836
	P320-3	25x80	9+10 +10	324	720	314	209	810	500	19	27,0	0,30	8028406001843
	P350-3	25x80	10+11+11	354	810	344	233	900	530	19	29,5	0,33	8028406001850
	P380-3	25x90	11+12+12	384	870	374	252	960	560	19	33,0	0,36	8028406001867
D.LGS. 81/2008	**P420-3**	25x90	12+13+13	424	990	391	257	1080	577	22	37,0	0,46	8028406001874
	P450-3	25x90	13+14+14	454	1080	421	278	1170	607	22	37,5	0,50	8028406001881

75° 68° Slope min.65° max.75°

Stabiliser bar
83/128 cm

Lower section: 50 cm
Middle section: 45 cm
Upper section: 39 cm

This product is delivered with a PVC wrap film and product leaflet

THE EUROPEAN NORM EN131

PROGETTO SISTEMA AZIENDA Full System FACAL

It means: "Company system"project

The European Norm EN131 settles the rules concerning concepts, resistance and minimum dimensions of access equipment with results targets.
The norm is made up of 7 parts. The firsts 3 regulations are the most important:

Norm EN131-1 This norm defines the product designation (leaning ladder, combination ladder, rope-operated extension ladder…), as well as the established use and the sizes for each kind of ladder.

Norm EN131-2 Definition of the tests methods and the results to obtain.

Norm EN131-3 This norm establishes the product labelling.



RESISTANCE TEST WITH 1100 N

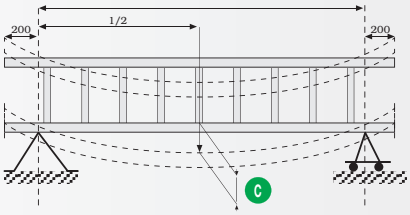

LADDER LATERAL FLEXION TEST
This test is done on each ladder section



EXTREMITIES BUCKLING TEST WITH 1100 N

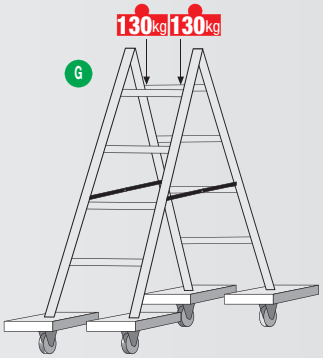

TEST EXECUTED ON THE SAFETY DEVICES AND HINGES OF STEPLADDERS.
(The ladder is on wheels)



TREADS AND PLATFORMS BENDING TEST



RUNGS ROTATION TEST

OUR PICTOGRAMS

Manufactured by FACAL …The Italian Ladders — Identification

SUITABLE FOR DOMESTIC USE ONLY — Domestic use

INTENSIVE USE — Professional and intensive use

MADE IN ITALY — Italian manufacture. Some imported components

MADE IN ITALY 100% — 100% Italian manufacture

SAFETY DEVICES — Presence of specific safety devices

ICT Adopted by FACAL 04 PE-LD IMBALLO CHIARO & TRASPARENTE

It means: **Clear and transparent packaging**

Clear and transparent packaging.
Use of clear and transparent packaging that allows the total view of the content.
We certify the use of recyclable LD-PE particles (low presence of polyethylene), free from heavy metals and other toxic substances.

IPA Idrocarburi Policiclici Aromatici — Plastiche esenti da metalli pesanti Zinco - Cromo - Cadmio — Controlled by FACAL

It means: **aromatic polycyclic hydrocarbons plastic parts are heavy metal- free (Zinc, Chrome, and Cadmium)**

Use of plastic parts obtained from materials (from raw material to pigment) free from aromatic polycyclic hydrocarbons, such as voluntarily inserted substances. This means " wilfully used during the material formulation to get specific product qualities and features).
The pigments used for our plastic partsproduction are heavy metals – free.

FSC Norma gestione ecosostenibile delle foreste — Controlled by FACAL

It means: **FSC Norm - Environment respect**

Product obtained from wood coming from eco-friendly forests.
No toxicity
Reusable through the recuperation and combustion process

DAMA

- Aluminium 2 or 3 sections combination ladder.

Code	(mm)	rungs number	(cm)	(cm)	(cm)	(cm)	(cm)	(cm)	(cm)	(cm)	(kg)	(m³)	Ean
2 SECTIONS													
D200-2	25x65	2x6	202	292	193	126	382	313	77	11	10,0	0,12	8028406001010
D260-2	25x65	2x8	262	412	250	162	502	370	93	11	12,5	0,15	8028406001027
D290-2	25x90	2x9	292	472	279	194	562	399	93	15	17,4	0,16	8028406001034
D350-2	25x90	2x11	354	594	338	229	684	458	114	15	21,2	0,27	8028406001041
D380-2	25x90	2x12	384	654	364	257	744	486	114	15	24,0	0,29	8028406001058
3 SECTIONS													
D200-3	25x65	3x6	202	382	195	130	472	385	77	16	15,0	0,16	8028406001065
D260-3	25x65	3x8	262	562	252	166	652	442	93	16	18,8	0,21	8028406001072
D290-3	25x90	3x9	292	652	280	197	742	471	93	21	26,8	0,33	8028406001089
D350-3	25x90	3x11	354	834	340	235	924	530	114	21	30,8	0,41	8028406001096
D380-3	25x90	3x12	384	921	369	264	1011	560	114	21	32,5	0,44	8028406001102

Lower section: **50 cm**
Middle section: **45 cm**
Upper section: **39 cm**

This product is delivered with a PVC wrap film and product leaflet

10-YEAR WARRANTY

MADE IN ITALY 100%

SUPER PRO 600 RANGE

150 kg MAX

EU

EN131
EUROPEAN NORM

POLITECNICO MILANO

2001/2390
2001/2392
2001/2393
2001/2391

The aluminium die casting hinges allow an easy stiles sliding.
Simple to open in A-frame position. Upper section fitted with 100 mm wall wheels

Alum anti-splay bars connected to stiles through expansion in the rungs' holes.
Strong restraint straps on a few models

Ribbed aluminium stabiliser bar

30x30 rhomboidal non-slip rungs with 68° slope

Steel safety hooks fixed to the stiles with stay bolts

Anti unthreading stops (EN 131)

GENIA

- Aluminium 2 or 3 sections combination ladder.
- Very good quality/price ratio.

Strong aluminium die casting hinges, fixed with screws to the stiles.
Easy to use both in A-frame step and as leaning ladder.

Code	(mm)	rungs number	(cm)	(cm)	(cm)	(cm)	(cm)	(cm)	(cm)	(cm)	(kg)	(m^3)	Ean
2 SECTIONS													
G200-2	25x65	2x6	205	322	200	133	412	282	75	11	10,4	0,10	8028406105084
G250-2	25x65	2x7	245	382	222	145	472	312	75	11	11,6	0,12	8028406101031
G260-2	25x65	2x8	260	442	250	160	532	395	75	11	12,9	0,13	8028406101086
G300-2	25x65	2x9	295	502	282	192	592	399	93	11	14,0	0,14	8028406101109
G350-2	25x65	2x11	354	594	342	237	684	432	114	11	16,2	0,16	8028406101123
3 SECTIONS													
G200-3	25x65	3x6	205	420	200	136	510	372	75	16	12,8	0,14	8028406101178
G250-3	25x65	3x7	249	510	225	148	600	425	75	16	15,6	0,16	8028406101048
G260-3	25x65	3x8	264	600	250	162	690	460	75	16	18,4	0,18	8028406101093
G300-3	25x65/80	3x9	299	720	285	195	810	543	93	18	20,3	0,21	8028406101116
G320-3	25x65/80	3x10	326	780	305	220	870	605	93	18	24,5	0,30	8028406101079
G350-3	25x90	3x11	356	834	345	240	924	603	114	21	29,0	0,33	8028406101130
G380-3	25x90	3x12	388	921	364	260	1011	633	114	21	31,0	0,44	8028406102397



Lower section: **45,5 cm**
Middle section: **39,0 cm**
Upper section: **33,5 cm**

PRO 300 RANGE

5-YEAR WARRANTY

MADE IN ITALY 100%

150 kg MAX

EU EN131 EUROPEAN NORM

www.tuv.com TÜVRheinland ID:1000000000 GS geprüfte Sicherheit

S 60080270

VERY HIGH LENGTHS

5 cm rubber shoes

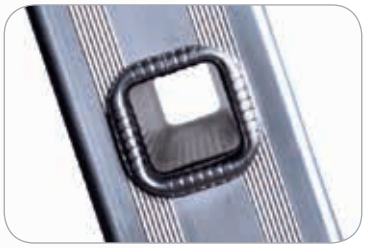

30x30 mm square non-slip rungs

SAFETY: Steel safety hooks fixed to the stiles with stay bolts. They create a unique piece with the anti-unthreading stops

INNOVATION!!
HIGH EXTENSION!!
thanks to exclusive manufacturing details, such as the employment of particular alloys, and the diversified stiles sections, the ladder can reach very high lengths

Strong anti-splay restraint straps on all models

Aluminium stabiliser bar

Diversified stiles sizes on the model G300-3

SUPER PRO 600 RANGE

VETROPRIMA

- 2 or 3 sections combination ladder, with stratified fibreglass stiles. It assures an high electric isolation.
- Overturned V" telescopic stabiliser bar in standard production. It fits itself to all conditions and it compensates all ground's drops, even the extremer ones. Stairwell ladder. Ready to use.

Dynamic Hooking
The solid aluminium hinges hook themselves to each rung to obtain a stairwell ladder, if necessary.

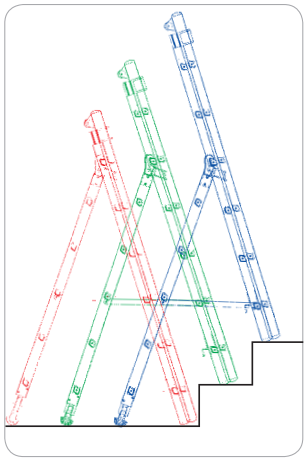

Code	(mm)	rungs number	(cm)	(cm)	(cm)	(cm)	(cm)	(cm)	(cm)	(kg)	(m^3)	Ean
						2 SECTIONS						
V210-2	26x68	5 + 6	204	300	194	126	390	310	12	14	0,15	8028406080060
V260-2	26x68	7 + 8	264	420	254	157	510	370	12	17	0,18	8028406080077
V290-2	26x94	8 + 9	294	480	284	180	570	400	14	20	0,21	8028406080084
V350-2	26x94	10 + 11	354	570	344	228	660	460	14	23	0,26	8028406080091
V380-2	26x94	11 + 12	384	630	374	247	720	490	16	27	0,29	8028406080107
						3 SECTIONS						
V210-3	26x68	5+6+6	204	420	194	126	510	390	17	17	0,20	8028406080114
V260-3	26x68	7+8+8	264	565	254	157	655	440	17	22	0,23	8028406080121
V290-3	26x94	8+9+9	294	625	284	180	715	470	19	29	0,28	8028406080138
V350-3	26x94	10+11+11	354	810	344	233	900	530	19	35	0,33	8028406080145
V380-3	26x94	11+12+12	384	900	374	252	990	560	21	39	0,36	8028406080152

75° 68° min.65° max.75°

Stabiliser bar
83/128 cm

Lower section: **50 cm**
Middle section: **45 cm**
Upper section: **39 cm**

ELECTRIC ISOLATION

This product is delivered with a PVC wrap film and product leaflet

10-YEAR WARRANTY

MADE IN ITALY 100%

SUPER PRO 600 RANGE

150 kg MAX

EU EN131 EUROPEAN NORM

POLITECNICO MILANO

2001/2382	2001/2383
2001/2385	2001/2386
2001/2384	2001/2387

Composite profile made of stratified fibreglass and resin tissues. It's manufactured by a pultrusion process



30x30 rhomboidal non-slip rungs with 68° slope

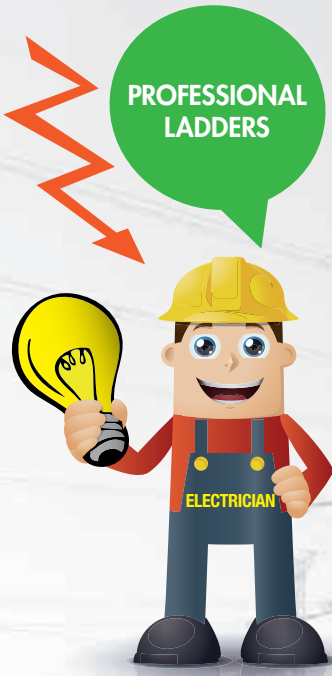

ACCESSORY:
Universal standoff

PICTOGRAMS

1 Inspect the ladder after delivery and before first use to confirm condition and operation of all parts. Make sure that the ladder is provided with labels and use and maintenance guide, as required by the European norm EN131.

2 Ensure the ladder is suitable for the task. For stepladders, you shall consider a maximum working height of 1.80 m. starting from the point where the feet are placed. Do not stand on the top three steps or rungs of a leaning ladder; Do not stand on the top two steps or rungs of a trestle ladder where there is no platform or support at hand or knee height.

3 NDo not use damaged ladders. Replace the damaged elements. Fibreglass ladders have a shorter life than aluminium ones, therefore do not expose them for long time to extreme cold or to summer sunshine.

4 Repairs and maintenance shall be carried out by competent persons. Only original components shall be used. Ask them to the authorised retailer.

5 Remove any contamination from the ladder, such as wet paint or mud, that might cause the deterioration and/or the non-safety use of the product.



6 Ladders must be put up in the right position. The correct slope for a leaning ladder is between 68° and 75°(the base should be 1 / 4 of its length distant from the wall or from the projection of ladder's top on the ground). You shall completely open stepladder and you shall lock the safety devices, if fitted.

7 Ladders shall not be positioned on slippery surfaces (such as ice, shiny surfaces or significantly contaminated surfaces) unless additional effective measures are taken to prevent the ladder slipping).



8 Leaning ladders used for access to a higher level should be extended at least 1.1m above the landing point.

9 Ladders must never be repositioned from a point high-up.

10 Do not exceed the maximum total load for the type of ladder. 150 kg according to the EN131 Norm.

11 The ladder shall be used by a person at a time.

12 Do not lean out from the ladder. Avoid sideways loads. Avoid all excessive lateral constraints .

13 Do not position your feet over the last meter of a ladder (third rung from the top).

14 Do not spend long periods on a ladder without regular breaks (tiredness is a risk).

15 Metal ladders are electricity conductors. Don't use them close to electric cables. The use of fibreglass ladders is recommended.

16 Do not use the ladder outside in adverse weather conditions).

17 Ladder aren't toys. Take all necessary precautions to prevent from children playing on ladders.

18 Do not use the ladder near opened doors or windows or mobile devices.

19 Keep on a secure grip and face the ladder when ascending and descending.



20 Do not use the ladder as a bridge.

21 Wear suitable footwear when climbing ladder.

22 For professional users regular periodic inspection is required.

OTHER SAFETY INFORMATIONS

- You shall always put both feet on the same treads/rungs during the use. In this way you will work safely.
- The four feet of a stepladder shall always touch the ground.
- The tools tray, where expected, is not considered as a tread/rung.
- Before use, completely open the ladder.
- Fibreglass ladders: you shall periodically inspect stiles conditions. Nicks that could appear on the stiles, could be due to simple scratches of the clear polyester protection finishing. These are not cause of structural weakness. If you notice any detrimental material change, you shall replace the element at once.
- Use the ladders, just for the task they have been planned for.
- Feet and shoes are subject to wear. Replace them when they are consumed.
- When you lean the ladder against a roof, the ladder itself has to go beyond 1 meter at least to safely land on the roof.

ADVICES FOR A GOOD USE

- If you have to spend long time on a ladder, you should choose a product with rhomboidal rungs or with treads. Your legs and feet won't get tired.
- You always shall verify the ladder conditions before the use.
- In case you have some worn components, you have to contact the retailer.
- The producer is not responsible for reparations performed from non-qualified persons, or for components replaced with non-original parts.

LEANING LADDERS

COMBINATION LADDERS

ROPE-OPERATED EXTENSION LADDERS / EXTENSION LADDERS

TELESCOPIC LADDERS / MULTIPURPOSE LADDERS

STEPLADDERS / DOUBLE-SIDED STEPLADDERS / SPECIAL LADDERS

WAREHOUSE STEPS / SHELF LADDERS / WORK PLATFORMS / BRIDGING PLATFORMS / FOLDING WORK PLATFORMS

VERTICAL LADDER WITH SAFETY CAGE

ALUMINIUM ACCESS TOWERS / SCAFFOLDINGS

STEEL ACCESS TOWERS / SCAFFOLDINGS

STEP STOOLS / SAWHORSES

HOUSEHOLD STEPLADDERS

LOADING RAMPS / GANGWAYS

STANDS & GRAPHICS

ACCESSORIES AND SPARE PARTS

ROLLER

- 2 or 3 sections aluminium rope-operated extension ladder.
- 3 sections: 2 ropes and 2 mechanism.
- Rung-by-rung height adjustment.
- High resistance ropes, with different colours, for a better differentiation.
  - Upper section – rope colour BLACK.
  - Middle section – rope colour WHITE/RED/GREEN.
- Interchangeable ladder shoes and locking fall hock.

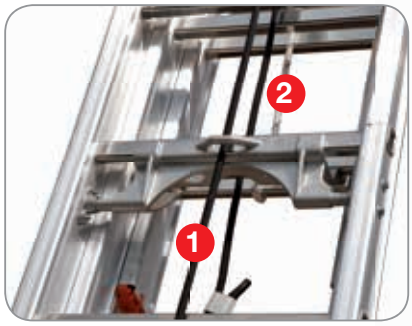

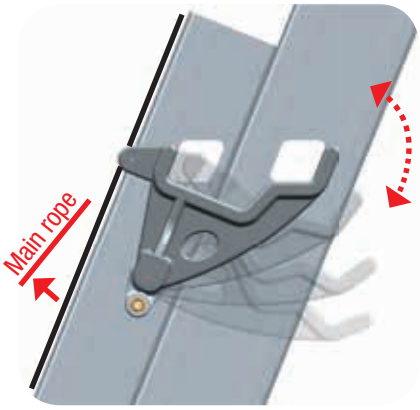

Stiles are equipped with integrated rails to get an optimal sliding. Anti-finger crushing system.

Code	rungs number	(cm)	(cm)	(cm)	(cm)	(kg)	(m³)	Ean
				2 SECTIONS				
R35-2	2x11	353	590	680	17	23,2	0,26	8028406101963
R41-2	2x13	413	711	800	17	27,2	0,30	8028406101970
R44-2	2x14	443	771	860	17	28,8	0,33	8028406101987
R50-2	2x16	503	891	980	17	32,6	0,37	8028406101994
R56-2	2x18	563	1011	1100	17	36,2	0,41	8028406102007
				3 SECTIONS				
R35-3	3x11	353	854	944	24	36,8	0,41	8028406102014
R41-3	3x13	413	1034	1124	24	42,6	0,47	8028406102021
R44-3	3x14	443	1064	1154	24	45,6	0,51	8028406102038
R50-3	3x16	503	1244	1334	24	51,2	0,58	8028406102045

25x90 mm

Lower section: **45,5 cm**
Middle section: **40,0 cm**
Upper section : **35,0 cm**

This product is delivered with a PVC wrap film and product leaflet

10-YEAR WARRANTY

MADE IN ITALY 100%

SUPER PRO 600 RANGE

150 kg MAX

EU EN131 EUROPEAN NORM

www.tuv.com TÜVRheinland ID:1000000000 GS geprüfte Sicherheit

R 60080271

Upper section fitted with 100 mm wall wheels

30x30 rhomboidal non-slip rungs with 68° slope



Ribbed profile to avoid bending

Big anti-slip shaped feet

10-YEAR WARRANTY

MADE IN ITALY 100%

SUPER PRO 600 RANGE

"PRIMA"

- 2 or 3 sections aluminium rope-operated extension ladder.
- It's fitted with a steel locking fall hook.
- Telescopic stabiliser bar in standard production.

150 kg MAX

EN131 EUROPEAN NORM

2001/1677 2001/1676
2001/1674 2001/1678
2001/1672 2001/1675
2001/1673

30x30 rhomboidal non-slip rungs with 68° slope

Steel locking fall hook mechanism
1 Main rope
2 Secondary rope to recall the locking fall hook

Steel sliding devices coated with nylon



Steel parts coated with nylon

	Code	(mm)	rungs number	(cm)	(cm)	(cm)	(cm)	(kg)	(m³)	Ean
	2 SECTION									
	P320-2F	25x80	9 + 10	324	510	600	14	20,5	0,23	8028406001003
	P350-2F	25x80	10 + 11	354	570	660	14	22,5	0,25	8028406000990
	P420-2F	25x90	12 + 13	424	690	780	16	26,5	0,33	8028406000983
	P450-2F	25x90	13 + 14	454	750	840	16	28,5	0,36	8028406000976
	3 SECTION									
	P320-3F	25x80	9+10+10	324	720	810	17	30,5	0,30	8028406000969
	P350-3F	25x80	10+11+11	354	810	900	17	32,5	0,33	8028406000952
D.LGS. 81/2008	**P420-3F**	25x90	12+13+13	424	990	1080	22	37,5	0,46	8028406000945
	P450-3F	25x90	13+14+14	454	1080	1170	22	40,5	0,50	8028406000938

This product is delivered with a PVC wrap film and product leaflet

min.65° max.75°

Stabiliser bar
83/128 cm

Lower section: 50 cm
Middle section: 45 cm
Upper section: 39 cm

10-YEAR WARRANTY

MADE IN ITALY 100%

SUPER PRO 600 RANGE

"PRIMA"

- Aluminium 2 sections extension ladder.

150 kg MAX

EN131 EUROPEAN NORM

S 60080051

ACCESSORY: Steel hooks

Plug-in top feet



30x30 mm rhomboidal non-slip rungs, with 68° slope

Anti unthreading stops

5 cm high anti-slip shoes, for high safety





Steel sliding devices coated with nylon

Code	(mm)	Rungs number	(cm)	(cm)	(cm)	(cm)	(kg)	(m^3)	Ean
P210-2SF	25x65	2x6	205	322	412	11	9	0,11	8028406102649
P240-2SF	25x65	2x7	235	382	472	11	10,5	0,13	8028406102601
P260-2SF	25x65	2x8	265	442	532	11	12	0,15	8028406102656
P290-2SF	25x65	2x9	295	471	561	11	13	0,17	8028406102663
P350-2SF	25x80	2x11	355	591	681	13	15,5	0,25	8028406102670
P380-2SF	25x80	2x12	385	651	741	13	17	0,28	8028406102618
P450-2SF	25x90	2x14	444	741	831	14	21,3	0,35	8028406106876
P510-2SF	25x90	2x16	504	861	951	14	24,4	0,40	8028406106883
FE-119/A	Steel hook								8028406106579

This product is delivered with a PVC wrap film and product leaflet

68° cm 39

5 YEAR WARRANTY

MADE IN ITALY 100%

PRO 300 RANGE

GENIA

- Aluminium 2 sections extension ladder.

150 kg MAX

EN131 EUROPEAN NORM

S 60080051

ACCESSORY: Steel hooks

Plug-in top feet

30x30 mm square non-slip rung, with 68° slope

Anti unthreading stops

Steel sliding devices coated with nylon

5 cm high anti-slip shoes, for high safety

Code	(mm)	Rungs number	(cm)	(cm)	(cm)	(cm)	(kg)	(m³)	Ean
G200-2SF	25x65	2x6	205	325	415	11	8,5	0,10	8028406104964
G240-2SF	25x65	2x7	235	385	475	11	10	0,12	8028406104971
G260-2SF	25x65	2x8	265	445	535	11	11,5	0,13	8028406104988
G290-2SF	25x65	2x9	295	475	565	11	16,5	0,15	8028406104995
G320-2SF	25x65	2x10	325	535	625	11	18,3	0,16	8028406106081
G350-2SF	25x65	2x11	355	595	685	11	20	0,18	8028406105008
G380-2SF	25x80	2x12	385	655	745	13	24	0,24	8028406106098
G450-2SF	25x80	2x14	445	775	865	13	27,5	0,27	8028406106104
FE-119/A	Steel hook								8028406106579

68° cm 39

LEANING LADDERS

COMBINATION LADDERS

ROPE-OPERATED EXTENSION LADDERS / EXTENSION LADDERS

TELESCOPIC LADDERS / MULTIPURPOSE LADDERS

STEPLADDERS / DOUBLE-SIDED STEPLADDERS / SPECIAL LADDERS

WAREHOUSE STEPS / SHELF LADDERS / WORK PLATFORMS / BRIDGING PLATFORMS / FOLDING WORK PLATFORMS

VERTICAL LADDER WITH SAFETY CAGE

ALUMINIUM ACCESS TOWERS / SCAFFOLDINGS

STEEL ACCESS TOWERS / SCAFFOLDINGS

STEP STOOLS / SAWHORSES

HOUSEHOLD STEPLADDERS

LOADING RAMPS / GANGWAYS

STANDS & GRAPHICS

ACCESSORIES AND SPARE PARTS

SUPER PRO 600 RANGE

euro BRIKO

- Aluminium telescopic ladder with exclusive technical features.
- It fits itself to all uses.
- Aluminium die casting hinges.
- They're hyper resistant thanks to the introduction of an internal structure made of steel blades (patented by FACAL).
- Rung/stile connection through six points of robotized welding.
- Strong anti-splay restraint straps with carabineer on all models.

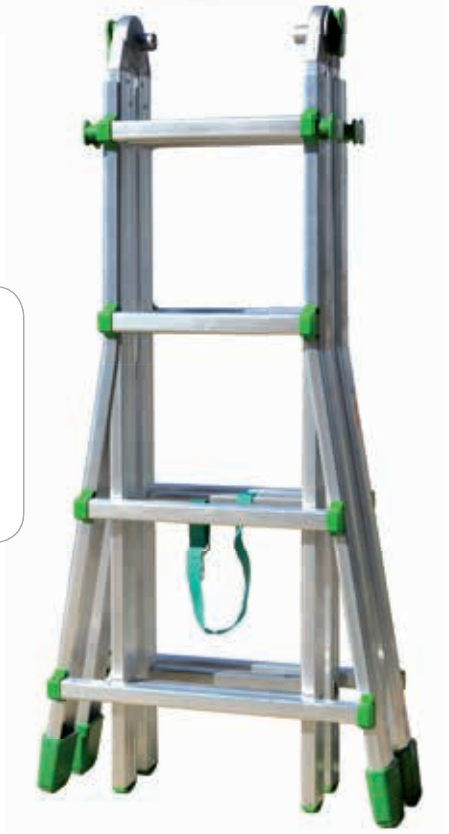

IMPORTANT!!!

2 possible hinge positions:



Multiple working positions among which the "free hinge position": when the ladder is in A-frame position it can be easily opened or closed

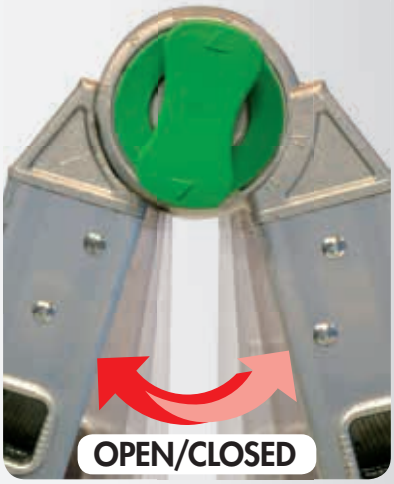

POSITIONS

		Code	rungs number	(cm)	(cm)	(cm)	(cm)	(cm)	(cm)	(cm)	(kg)	(m³)	Ean
150 kg	EN131 European Norm	BK/1	4x3	98	310	152	86	400	265	51	9,40	0,093	8028406002352
		BK/1,5	2x3+2x4	129	390	180	110	480	295	51	10,20	0,123	8028406002611
		BK/2	4x4	129	430	208	128	520	325	62	12,00	0,135	8028406002369
100 kg	D.LGS 81/2008	BK/3	2x4+2x5	158	490	235	143	580	355	62	12,60	0,164	8028406002376
		BK/4	4x5	158	550	265	168	640	385	62	13,80	0,164	8028406002383
		BK/5	4x6	188	610	292	210	700	415	71	16,40	0,210	8028406002628
150 kg	EN131 European Norm	BK/6*	4x7	218	-	350	246	-	475	81	19,00	0,250	8028406002635

24x60 mm | 30x69 mm | 21 cm | 34,5 cm

*BK/6: only A-frame step position

This product is delivered with a PVC wrap film and product leaflet

10-YEAR WARRANTY

MADE IN ITALY 100%

SUPER PRO 600 RANGE

SAFETY:
anti-slip high shoes

150 kg MAX

EN131 EUROPEAN NORM

BK/1-1,5-2
2004/1324
BK/6
2004/1327

100 kg MAX

BK/3-4
2004/1325
BK/5
2004/1326

30X30 mm square non-slip rungs

Rung locking pin, made from nylon and zinc-plated steel

IPA Idrocarburi Policiclici Aromatici
Plastiche esenti da metalli pesanti
Zinco - Cromo - Cadmio
Controlled by FACAL®

It means: aromatic polycyclic hydrocarbons plastic parts are heavy metal- free (Zinc, Chrome, and Cadmium)

ALUMINIUM DIE CASTING AUTOMATIC HINGE (PATENTED BY FACAL)

SAFETY

SAFETY DEVICES

STEEL BLADE INTERNAL STRUCTURE

STEEL BLADE SIDE SECTION

SUPER PRO 600 RANGE

BRIKO plus

- Aluminium telescopic ladder provided with steel and aluminium die casting hinges.
- It fits itself to all uses.
- Rung/stile connection through six points of robotized welding.

		Code	rungs number	(cm)	(cm)	(cm)	(cm)	(cm)	(cm)	(cm)	(kg)	(m³)	Ean
150 kg	EN131 European Norm	BKPL/1	4x3	98	310	152	86	400	265	51	9,40	0,093	8028406103035
		BKPL/1,5	2x3+2x4	129	390	180	110	480	295	51	10,20	0,123	8028406103042
		BKPL/2	4x4	129	430	208	128	520	325	62	12,00	0,135	8028406103059
100 kg	D.LGS 81/2008	BKPL/3	2x4+2x5	158	490	235	143	580	355	62	12,60	0,164	8028406103066
		BKPL/4	4x5	158	550	265	168	640	385	62	13,80	0,164	8028406103073
		BKPL/5	4x6	188	610	292	210	700	415	71	16,40	0,210	8028406103080

24x60 mm | 30x69 mm | 21 cm | 34,5 cm

This product is delivered with a PVC wrap film and product leaflet

10-YEAR WARRANTY

MADE IN ITALY 100%

SUPER PRO 600 RANGE

150 kg MAX

EN131 EUROPEAN NORM

BKPL/1-1,5-2
2006/4493

100 kg MAX

BKPL/3-4
2006/4494
BKPL/5
2006/4495

30x30 mm square non-slip rungs

Steel automatic hinge

Rung locking pin, made from aluminium die casting and stainless steel

HOBBY SEI

- Aluminium multipurpose ladder equipped with 6 automatic zinc-plated steel hinges.
- Compact four-section ladder.
- 5 work positions: A-frame step position leaning ladder, work bench, ladder with standoff, stairwell ladder.
- 2 horizontal stabiliser bars with big anti-slip feet.
- Small encumbrance for storage and transport.

ACCESSORY: wooden folding platform 29,5x161 cm

Code	rungs number	(cm)	(cm)	(cm)	(cm)	(cm)	(cm)	(cm)	(cm)	(cm)	(kg)	(m^3)	Ean
H6/370	4x3	100	371	180	128	461	270	97	167	240	12,8	0,09	**8028406102281**
H6/P	ACCESSORY: wooden folding platform (29,5 x 161 cm)												**8028406102335**

24x60 mm · 71° · 71° · min.65° max.75° · cm 34,5 · cm 75,5 · cm 26,5

This product is delivered with a PVC wrap film and product leaflet

PRO 300 RANGE

5-YEAR WARRANTY

MADE IN ITALY 100%

150 kg MAX

EN131 EUROPEAN NORM

S 60080284

30x30 mm square non-slip rungs

5 YEAR WARRANTY

MADE IN ITALY 100%

PRO 300 RANGE

HOBBY·DUE

150 kg MAX

EN131 EUROPEAN NORM

S 60080284

- Aluminium multipurpose ladder with 2 automatic steel hinges.
- 2 work positions: leaning ladder, A-frame step position.
- 68,5 cm stabiliser bar at the base.

Stabiliser bar at the base

30x30 mm square non-slip rungs

Steel hinges with automatic locking

Code	rungs number	(cm)	(cm)	(cm)	(cm)	(cm)	(cm)	(kg)	(m³)	Ean
H2/310	5 + 5	161,7	312	152,5	109,0	402	242	8,6	0,08	8028406102250
H2/370	6 + 6	191,7	372	181,5	126,0	462	271	9,6	0,09	8028406102267
H2/430	7 + 7	221,7	432	209,8	147,0	522	361	11,0	0,11	8028406102274

24x60 mm | 71° | 34,5 cm | 68,5 cm | 12,5 cm

This product is delivered with a PVC wrap film and product leaflet

LEANING LADDERS

COMBINATION LADDERS

ROPE-OPERATED EXTENSION LADDERS / EXTENSION LADDERS

TELESCOPIC LADDERS / MULTIPURPOSE LADDERS

STEPLADDERS / DOUBLE-SIDED STEPLADDERS / SPECIAL LADDERS

WAREHOUSE STEPS / SHELF LADDERS / WORK PLATFORMS / BRIDGING PLATFORMS / FOLDING WORK PLATFORMS

VERTICAL LADDER WITH SAFETY CAGE

ALUMINIUM ACCESS TOWERS / SCAFFOLDINGS

STEEL ACCESS TOWERS / SCAFFOLDINGS

STEP STOOLS / SAWHORSES

HOUSEHOLD STEPLADDERS

LOADING RAMPS / GANGWAYS

STANDS & GRAPHICS

ACCESSORIES AND SPARE PARTS

SUPER PRO 600 RANGE

QUADRA

- Aluminium stepladder, manufactured according to the most advanced technologies.
- Ribbed aluminium die casting non-slip platform.
- Safety bridge.
- Strong anti-splay restraint straps from 5 treads up.

AVAILABLE COLOURS:
RAL 2004 ORANGE
RAL 9004 BLACK
RAL 6017 GREEN

ACCESSORY:
2 safety aluminium folding handrails can be fitted to the ladder on demand

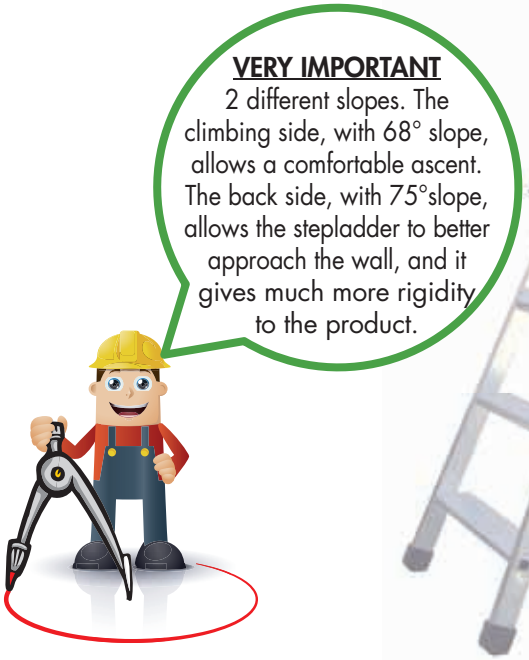

Code	rungs number	Ean
MQ/006	6	8028406103103
MQ/007	7	8028406103110
MQ/008	8	8028406103127
MQ/009	9	8028406102526
MQ/010	10	8028406102533
MQ/011	11	8028406102540
MQ/012	12	8028406102557
MQ/013	13	8028406102564

Code	(mm)	rungs number*	(cm)	(cm)	(cm)	(cm)	(cm)	(cm)	(cm)	(kg)	(m^3)	Ean
Q50/3	24x50	3	65	125	245	65	44	11,5	138	4,5	0,05	8028406002406
Q50/4	24x50	4	88,5	148,5	268,5	81	47	11,5	162	5,2	0,07	8028406002413
Q50/5	24x50	5	112	172	292	97	50	11,5	188	6,8	0,09	8028406002420
Q50/6	24x50	6	136	196	316	113	53	11,5	212	7,5	0,10	8028406002437
Q50/7	24x50	7	159	219	339	133	56	11,5	237	8,3	0,12	8028406002444
Q50/8	24x50	8	182,5	242,5	362,5	148	59	11,5	262	9,5	0,14	8028406002451
Q60/9	24x60	9	205	265	385	164	62	14	287	11,2	0,18	8028406002468
Q60/10	24x60	10	228	288	408	184	65	14	312	12,0	0,20	8028406002475
Q60/11	24x60	11	252	312	432	199	68	14	337	13,2	0,22	8028406002482
Q60/12	24x60	12	276	336	456	215	71	14	362	14,2	0,25	8028406002499
Q60/13	24x60	13	299,5	359,5	479,5	233	74	14	387	15,8	0,27	8028406002390

*platform included

This product is delivered with a PVC wrap film and product leaflet

SUPER PRO 600 RANGE

INTENSIVE USE

10-YEAR WARRANTY

MADE IN ITALY 100%

150 kg MAX

EU EN131 EUROPEAN NORM

POLITECNICO MILANO 2001/1683

www.tuv.com TÜVRheinland ID:1000000000 GS geprüfte Sicherheit

S 60080344

Large tool tray

Aluminium die casting platform

Nylon brasses, for the platform rotation

Aluminium die casting hinge with polyamide clutch insert to avoid the material wear and tear

SAFETY DEVICES SAFETY: Anti-lifting hook

85 mm non-slip treads

Stile/tread connection through triple expansion and crimping

Anti-slip high shoes for high safety

IPA Idrocarburi Policiclici Aromatici
Plastiche esenti da metalli pesanti
Zinco - Cromo - Cadmio
Controlled by FACAL®

It means: **aromatic polycyclic hydrocarbons plastic parts are heavy metal- free (Zinc, Chrome, and Cadmium)**

Notes

10-YEAR WARRANTY

MADE IN ITALY 100%

SUPER PRO 600 RANGE

QUADRA Picta

100% CLEAN HAND USAGE

150 kg MAX

EU EN131 EUROPEAN NORM

POLITECNICO MILANO 2001/1683

www.tuv.com TÜVRheinland ID:7000000000 GS geprüfte Sicherheit

S 60080344

- Aluminium stepladder, coated with epoxy powder.
- For technical features see QUADRA at pages 40-41.

- ACCESSORY:
  2 safety aluminium folding handrails can be fitted to the ladder on demand.

85 mm non-slip aluminium treads

Plastic parts: Orange RAL2004

Stiles colour: Blue RAL 5002

Plastic parts: Green RAL 6017

Stiles colour: Black RAL 9004

Code	rungs number*	(cm)	(cm)	(cm)	(cm)	(cm)	(cm)	(kg)	(m^3)	Ean
Q50/3P	3	65	125	245	65	44	138	4,5	0,05	8028406107712
Q50/4P	4	88,5	148,5	268,5	81	47	162	5,2	0,07	8028406101925
Q50/5P	5	112	172	292	97	50	188	6,8	0,09	8028406101932
Q50/6P	6	136	197	316	113	53	212	7,5	0,10	8028406101949
Q50/7P	7	159	219	339	133	56	237	8,3	0,12	8028406101956
Q50/8P	8	182,5	242,5	362,5	148	59	262	9,5	0,12	8028406107729

24x50 mm | 68° | 75° | 11,5 cm | 60 cm

*platform included

This product is delivered with a PVC wrap film and product leaflet

"DUPLA"

- Aluminium double-sided treads stepladder.
- Stile/tread connection through triple expansion and crimping.

Aluminium die casting hinges

68° SLOPE ON BOTH SIDES

SAFETY DEVICES

SAFETY: 2 strong restraint straps – 3 cm wide

Code	treads number	(cm)	(cm)	(cm)	(cm)	(cm)	(kg)	(m^3)	Ean
D-5	5 + platform	130	113	230	50,0	141	7,8	0,100	**8028406002024**
D-6	6 + platform	154	125	254	53,5	166	9,0	0,123	**8028406002031**
D-7	7 + platform	176	144	276	56,0	190	10,4	0,145	**8028406002048**
D-8	8 + platform	199	169	299	59,5	215	11,8	0,170	**8028406002055**
D-9	9 + platform	223	184	323	62,0	241	13,6	0,197	**8028406002062**
D-10	10 + platform	249	197	349	65,5	265	14,8	0,249	**8028406002079**
D-12	12 + platform	297	220	397	72,0	315	17,8	0,284	**8028406002086**

This product is delivered with a PVC wrap film and product leaflet

INTENSIVE USE

10-YEAR WARRANTY

MADE IN ITALY 100%

SUPER PRO 600 RANGE

150 kg MAX

EN131 EUROPEAN NORM

S 60080275

85 mm non-slip treads on both sides

Practical tool hook on side

SUITABLE FOR PROFESSIONAL USE



Anti-slip high shoes with anti finger-crushing system

Professional 1

- Aluminium double-sided rungs stepladder.
- Light, stable and easy to use.
- Aluminium die casting hinges.
- 2 strong anti-splay restraint straps.
- Possibility to add an aluminium die casting platform.

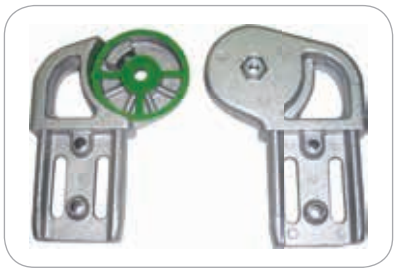

Aluminium die casting hinge with polyamide clutch insert

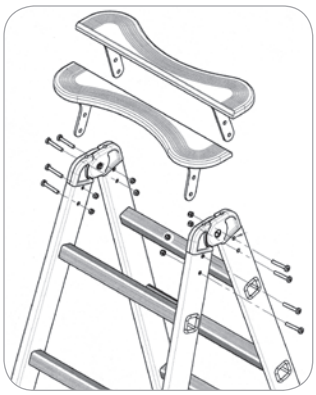

ACCESSORY: Aluminium die casting platform

WORK SLOPE AT 73° ON BOTH SIDES

Code	rungs number	(cm)	(cm)	(cm)	(cm)	(cm)	(kg)	(m^3)	Ean
P1-6	6	156,7	107,5	300	57,3	165,1	8,0	0,08	8028406002154
P1-7	7	180,6	122,2	325	60,3	190,1	9,5	0,09	8028406002161
P1-8	8	204,5	136,9	350	63,5	215,1	10,7	0,11	8028406002178
P1-9	9	228,4	151,6	375	66,6	240,1	12,3	0,12	8028406002185
P1-10	10	252,2	166,3	400	69,6	265,1	13,2	0,14	8028406002192
P1-12	12	300,0	195,7	440	75,7	315,1	15,5	0,16	8028406002253
P1-SEL	ACCESSORY: Aluminium die casting platform								8028406002260

This product is delivered with a PVC wrap film and product leaflet

INTENSIVE USE

10-YEAR WARRANTY

MADE IN ITALY 100%

SUPER PRO 600 RANGE

Aluminium die casting hinges and big tool hook on side

13,5 cm

150 kg MAX

EU

EN131 EUROPEAN NORM

POLITECNICO MILANO 2006/4881

www.tuv.com TÜVRheinland ID:1000000000 GS geprüfte Sicherheit

S 60080257

30x30 mm square non-slip rungs on both sides

Stile/rung connection through triple expansion and crimping

5 cm high anti-slip shoes, for high safety

VetroProf 1

- Fibreglass double-sided rungs stepladder.
- Electrically isolation, stable and easy to use. Suitable for electricians and technicians.
- Light and not bulky.
- Aluminium die casting hinges.
- Possibility to add an aluminium die casting platform.

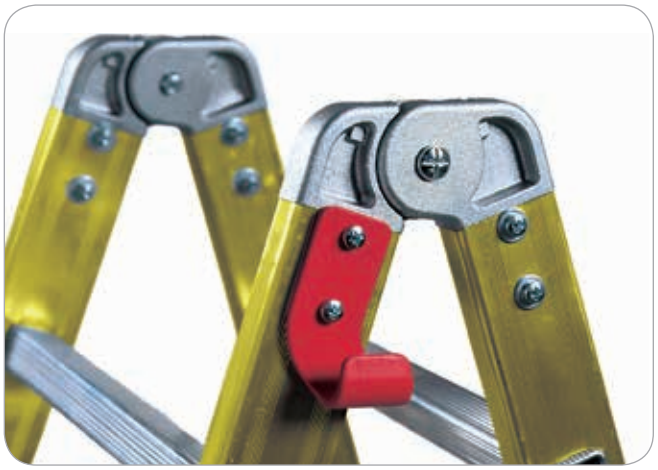

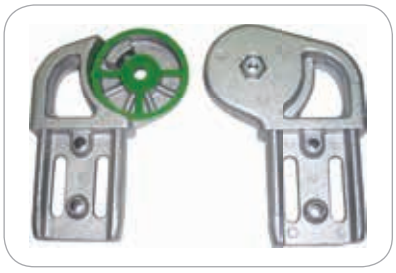

Aluminium die casting hinge with polyamide clutch insert to avoid the material wear and tear

ACCESSORY: Aluminium die casting platform

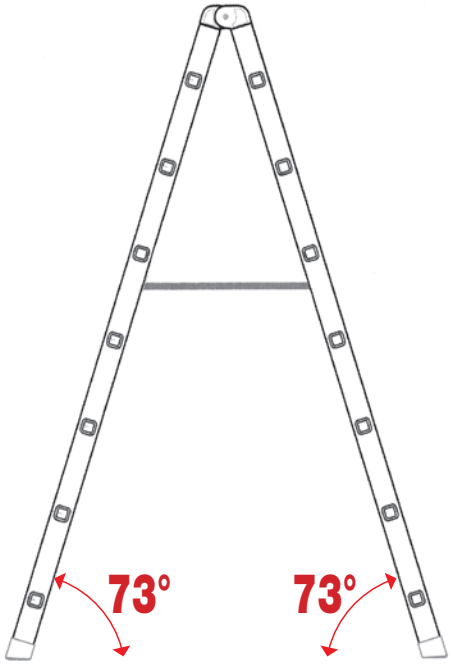

WORK SLOPE AT 73° ON BOTH SIDES

Code	rungs number	(cm)	(cm)	(cm)	(cm)	(cm)	(kg)	(m^3)	Ean
P1V-6	6	156,7	107,5	300	57,3	165,1	9,0	0,08	**8028406080015**
P1V-7	7	180,6	122,2	325	60,3	190,1	10,5	0,09	**8028406080022**
P1V-8	8	204,5	136,9	350	63,5	215,1	11,7	0,11	**8028406080039**
P1V-9	9	228,4	151,6	375	66,6	240,1	13,8	0,12	**8028406080046**
P1V-10	10	252,2	166,3	400	69,6	265,1	14,9	0,14	**8028406080053**
P1V-12	12	300,0	195,7	440	75,7	315,1	17,0	0,16	**8028406080002**
P1-SEL	ACCESSORY: aluminium die casting platform								**8028406002260**



This product is delivered with a PVC wrap film and product leaflet

2-YEAR WARRANTY

MADE IN ITALY 100%

SUPER PRO 600 RANGE

150 kg MAX

EN131 EUROPEAN NORM

POLITECNICO MILANO 2006/4882

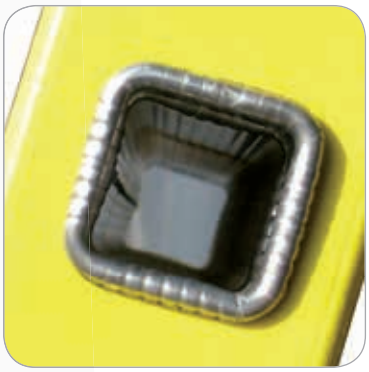

30x30 square non-slip rungs on both sides



Pultrusion composed by fibreglass and resin stratified tissues

STRUMENTA

- Aluminium double-sided treads stepladder.
- Suitable for professional use.

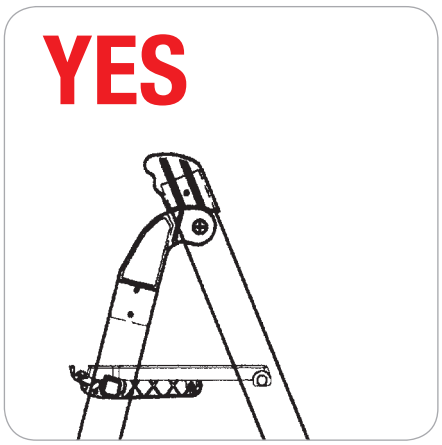

Platform shall be used as tool tray only

SAFETY: firm ergonomic rubber handles and aluminium die casting hinges with clutch insert

The platform is not walkable. The ladder has no rail

Aluminium die casting tool tray platform with safety hook on side

Code	treads number	(cm)	(cm)	(cm)	(cm)	(cm)	(cm)	(kg)	(m^3)	Ean
ST/5	5	85	141	99,5	265	50,5	155,5	7,0	0,07	8028406002208
ST/6	6	113	169	115,0	293	53,5	180,5	8,0	0,08	8028406002215
ST/7	7	141	197	130,5	321	56,5	212,0	9,0	0,09	8028406002222
ST/8	8	169	225	146,0	349	59,5	230,5	10,0	0,10	8028406002239
ST/11	11	233	290	192,5	433	68,3	312,0	11,5	0,16	8028406002246

This product is delivered with a PVC wrap film and product leaflet

INTENSIVE USE

10-YEAR WARRANTY

MADE IN ITALY 100%

SUPER PRO 600 RANGE



150 kg MAX

EN131 EUROPEAN NORM

2007/2264

FRONT SIDE: 85 mm non-slip treads with 68° slope

BACK SIDE: 30x30 mm square non-slip rungs with 75° slope

5 cm high anti-slip shoes, for high safety

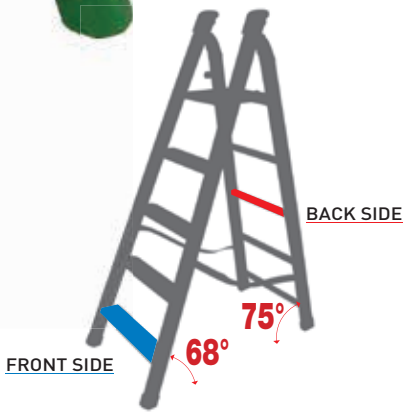

INTENSIVE USE

5-YEAR WARRANTY

MADE IN ITALY 100%

PRO 300 RANGE

MASTER PRO

- Aluminium double-sided rungs stepladder.
- 30x30 mm rhomboidal non-slip rungs.
- Ribbed 30x65 mm stiles.
- Big sizes ladder suitable for professional use.



100 kg MAX

Stile/rung connection through crimping and additional welding

SAFETY DEVICES

Steel hinges

Code	rungs number	(cm)	(cm)	(cm)	(cm)	(cm)	(kg)	(m³)	Ean
MA-350	13	350	192	480	76	355	17	0,20	8028406004097
MA-400	15	400	220	530	82	405	23	0,24	8028406004103
MA-450	17	450	248	570	88	455	29	0,28	8028406004110

30x65 mm | 75° | 75° | 14 cm | 34 cm | 27,5 cm

This product is delivered with a PVC wrap film and product leaflet

5-YEAR WARRANTY

MADE IN ITALY 100%

PRO 300 RANGE

"AGRI"

100 kg MAX

Steel hinge

- Aluminium fruit ladder.
- The top part of the climbing side is tight. In this way the ladder can easily go through branches and leaves.
- Suitable for plants and gardens maintenance and for fruits gathering.
- 30x65 mm ribbed stiles.
- Conical climbing side for total stability on uneven grounds too.

Code	rungs number	(cm)	(cm)	(cm)	(kg)	(m³)	Ean
AG200	4	200	78	300	3,80	0,06	**8028406002277**
AG250	6	250	98	350	5,70	0,08	**8028406002284**
AG300	8	300	118	400	8,00	0,12	**8028406002291**
AG350	10	350	137	450	10,00	0,16	**8028406002307**
AG400	11	400	137	500	12,00	0,19	**8028406002314**
AG450	13	450	137	550	13,40	0,22	**8028406002321**
AG500	15	500	137	600	15,80	0,24	**8028406002338**
PS-0	ACCESSORY: articulated oval shaped steel foot coated with rubber						**8028406107545**

Rung/stile connection through crimping and additional welding

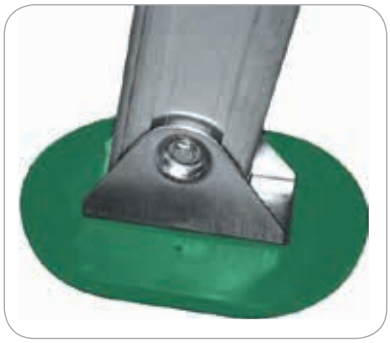

Big dimension (16x11 cm) articulated oval shaped steel foot, coated with rubber

"PITTORE"

100 kg MAX

- Double-sided stepladders. Pine wooden stiles and beech wooden rungs.
- Transparent varnish.

AVAILABLE IN TWO MODELS:

PITTORE:
- 60 mm wide treads on the climbing side.
- 20X30 mm back side rungs.
- Tool tray platform.
- Hinge with hook.

PIOLI:
- Rungs on both sides.
- No platform.
- Hinge with hook.

PITTORE

PIOLI

Code	rungs number	(cm)	(cm)			(kg)	(m³)	Ean
			PITTORE WITH PLATFORM					
PIT175	4+platform	160,0	132	270	168,5	10,5	0,08	8028406000808
PIT200	5+platform	186,5	159	296	196,5	12,0	0,10	8028406000815
PIT225	6+platform	212,5	185	322	223,0	13,5	0,12	8028406000822
PIT250	7+platform	238,5	211	348	250,0	15,0	0,14	8028406000839
PIT275*	8+platform	263,0	225	360	268,0	16,5	0,16	8028406000907
PIT300	9+platform	288,5	260	398	303,0	18,0	0,18	8028406000846
			PIOLI WITHOUT PLATFORM					
PIOLO175	6	160,0	-	270	168,5	5,5	0,08	8028406000853
PIOLO200	7	186,5	-	296	196,5	11,0	0,10	8028406000860
PIOLO225	8	212,5	-	322	223,0	12,3	0,12	8028406000877
PIOLO250	9	238,0	-	348	250,0	13,5	0,14	8028406000884
PIOLO300	11	288,0	-	398	303,0	16,5	0,18	8028406000891

12,4 cm

27,5 cm

*Available measure while stock last

LEANING LADDERS

COMBINATION LADDERS

ROPE-OPERATED EXTENSION LADDERS / EXTENSION LADDERS

TELESCOPIC LADDERS / MULTIPURPOSE LADDERS

STEPLADDERS / DOUBLE-SIDED STEPLADDERS / SPECIAL LADDERS

WAREHOUSE STEPS / SHELF LADDERS / WORK PLATFORMS / BRIDGING PLATFORMS / FOLDING WORK PLATFORMS

VERTICAL LADDER WITH SAFETY CAGE

ALUMINIUM ACCESS TOWERS / SCAFFOLDINGS

STEEL ACCESS TOWERS / SCAFFOLDINGS

STEP STOOLS / SAWHORSES

HOUSEHOLD STEPLADDERS

LOADING RAMPS / GANGWAYS

STANDS & GRAPHICS

ACCESSORIES AND SPARE PARTS

CASTIGLIA

- Very firm aluminium warehouse step with castors and double handrails.
- Folding for transport and storage.
- Climbing side with 60° slope for a more comfortable ascent.

Strong aluminium die casting connection

Large and non-slippery sheet aluminium platform (48x77 cm).
It's fitted with big tool tray

Code	treads number	(cm)	(cm)	(cm)	(cm)	(cm)	(cm)	(kg)	(m^3)	Ean
CA0/50	2 + plat.	68,0	175,0	250	68,0	110,0	199,0	23	0,20	8028406000006
CA0/75	3 + plat.	87,0	193,0	270	74,0	128,0	224,0	26	0,31	8028406000174
CA1/100	4 + plat.	108,0	214,5	290	76,0	144,5	249,0	30	0,40	8028406000013
CA2/125	5 + plat.	133,0	238,0	310	82,0	160,5	274,0	33	0,54	8028406000020
CA3/150	6 + plat.	154,0	262,0	330	86,0	174,0	299,0	36	0,60	8028406000037
CA4/175	7 + plat.	174,5	282,0	350	89,5	187,0	324,0	38	0,64	8028406000044
CA5/200	8 + plat.	195,0	304,0	380	95,0	198,5	340,0	40	0,69	8028406000051
CA6/225	9 + plat.	219,0	327,0	400	98,5	214,5	373,0	43	0,79	8028406000068
CA7/250	10 + plat.	239,5	347,5	420	104,0	227,5	399,0	46	0,90	8028406000075
CA8/275	11 + plat.	261,0	369,0	440	107,5	241,0	424,0	49	0,96	8028406000082
CA10/300	13 + plat.	305,0	413,0	480	116,0	265,0	474,0	56	1,04	8028406000099
CA11/325	14 + plat.	328,5	437,0	505	122,0	275,0	499,0	59	1,14	8028406000105
CA12/350	15 + plat.	347,5	453,5	525	124,5	293,0	526,0	62	1,24	8028406000112
CA13/375	16 + plat.	371,0	479,0	550	132,0	313,5	547,0	66	1,34	8028406000129
CA14/400	17 + plat.	392,0	499,7	570	134,0	318,0	575,0	70	1,48	8028406000136
CA15/425	18 + plat.	415,0	524,0	595	138,0	331,5	599,0	73	1,54	8028406000143
CA16/450	19 + plat.	435,0	542,0	615	139,0	344,5	626,0	77	1,66	8028406000150
CA18/500	21 + plat.	486,0	595,0	660	151,0	382,0	675,0	84	1,89	8028406000167
D660/1	2 small stabilisers (till CA7/250)									8028406103011
D662/1	2 big stabilisers (from CA8/275 to CA14/400)									8028406103028

Format for transport



SUPER PRO 600 RANGE

10-YEAR WARRANTY

MADE IN ITALY 100%

Stabilisers

EN131 EUROPEAN NORM

150 kg MAX

EN131 EUROPEAN NORM

With 2 stabilisers and TUV-GS certiticate

S 60080258

100 kg MAX

Without stabilisers



150 mm treads width. Stile/tread connection through 10 points without welding

Folding handles

80 mm Ø turning and self-blocking front castors

125 mm Ø rear castors with brake

SAFETY DEVICES

Castà

- Aluminium warehouse step.
- Folding, with castors and telescopic stabilisers.
- Use with opened stabilisers.

SAFETY DEVICES **SAFETY:**
4 PROTECTIONS

Folding guardrails

Fast opening and closing thanks to
RAPID SYSTEM

SAFETY DEVICES
Safety

Code	Treads number	(cm)	(cm)	(cm)	(cm)	(cm) EN131	(cm)	(cm)	(kg)	(m³)	Ean
CTA-3	2 + plat.	75	176	255	102	81	81	194	22	0,33	8028406106111
CTA-4	3 + plat.	103	204	283	121	173	81	224	27	0,38	8028406106128
CTA-5	4 + plat.	131	232	311	140	188	81	254	28	0,43	8028406106135
CTA-6	5 + plat.	159	260	339	159	216	81	284	29	0,48	8028406106142
CTA-7	6 + plat.	187	288	376	178	250	106	314	30	0,53	8028406106159
CTA-8	7 + plat.	215	316	395	197	268	106	344	32	0,58	8028406106166
CTA-9	8 + plat.	243	344	423	216	274	127	374	34	0,63	8028406106173
CTA-10	9 + plat.	271	372	451	235	337	127	404	36	0,69	8028406106180
CTA-11	10 + plat.	299	400	479	254	343	139	434	38	0,74	8028406106197

24x60 mm

Width - with closed stabilisers
68 cm

External stiles width
51 cm

Slope **68°**

This product is delivered with a PVC wrap film and product leaflet

5-YEAR WARRANTY

MADE IN ITALY 100%

PRO 300 RANGE

150 kg MAX

EU EN131 EUROPEAN NORM

www.tuv.com TÜVRheinland ID:1000000000 GS geprüfte Sicherheit

S 60080259

ADVANCED TECHNOLOGY! Large folding platforms with holes to keep it clean

85 mm non-slip aluminium treads

Stile/tread connection through triple expansion and crimping

80 mm Ø turning and self-blocking front castors

Stabiliser bar with aluminium die casting supports for castors

IPA Idrocarburi Policiclici Aromatici — Plastiche esenti da metalli pesanti Zinco - Cromo - Cadmio — Controlled by FACAL®

It means: **aromatic polycyclic hydrocarbons plastic parts are heavy metal- free (Zinc, Chrome, and Cadmium)**

S15/1 System

- Aluminium shelf ladder.
- 85 mm treads with 70° slope.
- This system is fitted with different accessories such as handrails, guide rails, rail supports, sliding castors.
- Easy to customize according to customer's needs.
- Suitable for shelves, lofts and machineries.

ACCESSORIES LIST

Standard short hook
(Code FE-011)

Hook for parked position
(Code FE-010/1)



Welded spacers
(Code S15/D15)

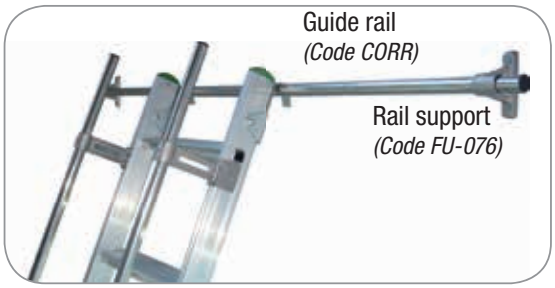

Code	(mm)	treads number	A1 (cm)	A2 (cm)	A3 (cm)	B (cm)	(kg)	vol. (m³)	Ean
S15/11	25x65	6	205	305	183	82	5,30	0,07	8028406000211
S15/12	25x65	8	265	365	228	104	6,50	0,09	8028406000228
S15/13	25x65	9	295	395	274	134	8,00	0,10	8028406000238
S15/14	25x65	11	355	455	328	144	8,70	0,11	8028406000242
S15/15	25x65	13	411	511	366	164	9,80	0,13	8028406000259
S15/16	25x65	14	445	545	398	174	10,40	0,14	8028406000266
S15/17	25x65	16	505	605	456	205	12,80	0,16	8028406000273
S15/18	25x65	18	561	661	502	226	13,60	0,18	8028406000280
S15/19	25x80	19	595	695	548	248	14,50	0,19	8028406000297

ACCESSORIES

FU-016	Fixed handrail support		8028406106463
FU-109	Folding handrail support		8028406106470
FU-076	Aluminium rail support		8028406106487
MAN	Ø 25 mm aluminium handrail		8028406106494
CORR	Ø 25 mm aluminium guide rail		8028406106500
FE-011	Standard short hook		8028406004134
FE-010/1	Hook for parked position		8028406106517
S15/D15	Welded spacers	pair	8028406106524
S15-MCSTD	Standard top handrails with clutches	pair	8028406106531
S15-MCVER	Vertical top handrails with clutches	pair	8028406106548
PL-228	Sliding castors with aluminium support	pair	8028406106555

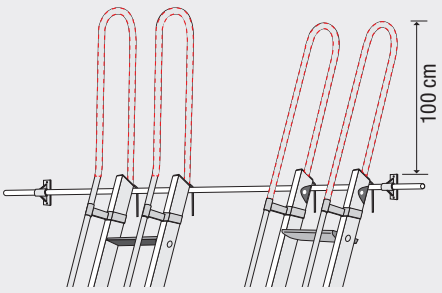

Vertical top handrails
(Code S15-MCVER)

Standard top handrails
(Code S15-MC-STD)

Sliding castors
(Code PL-228)

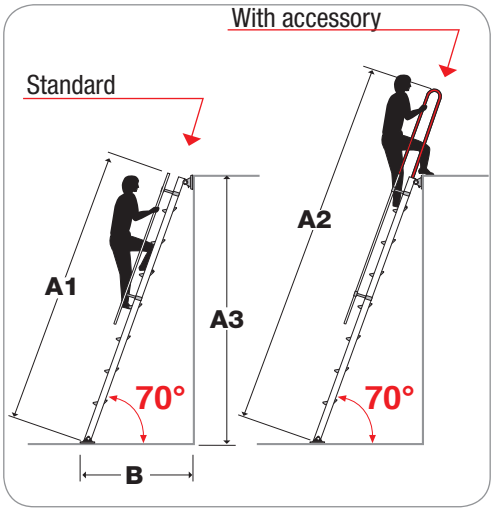

SUPER PRO 600 RANGE

10-YEAR WARRANTY

MADE IN ITALY 100%

ACCESSORY:
Aluminium die casting guide rail support

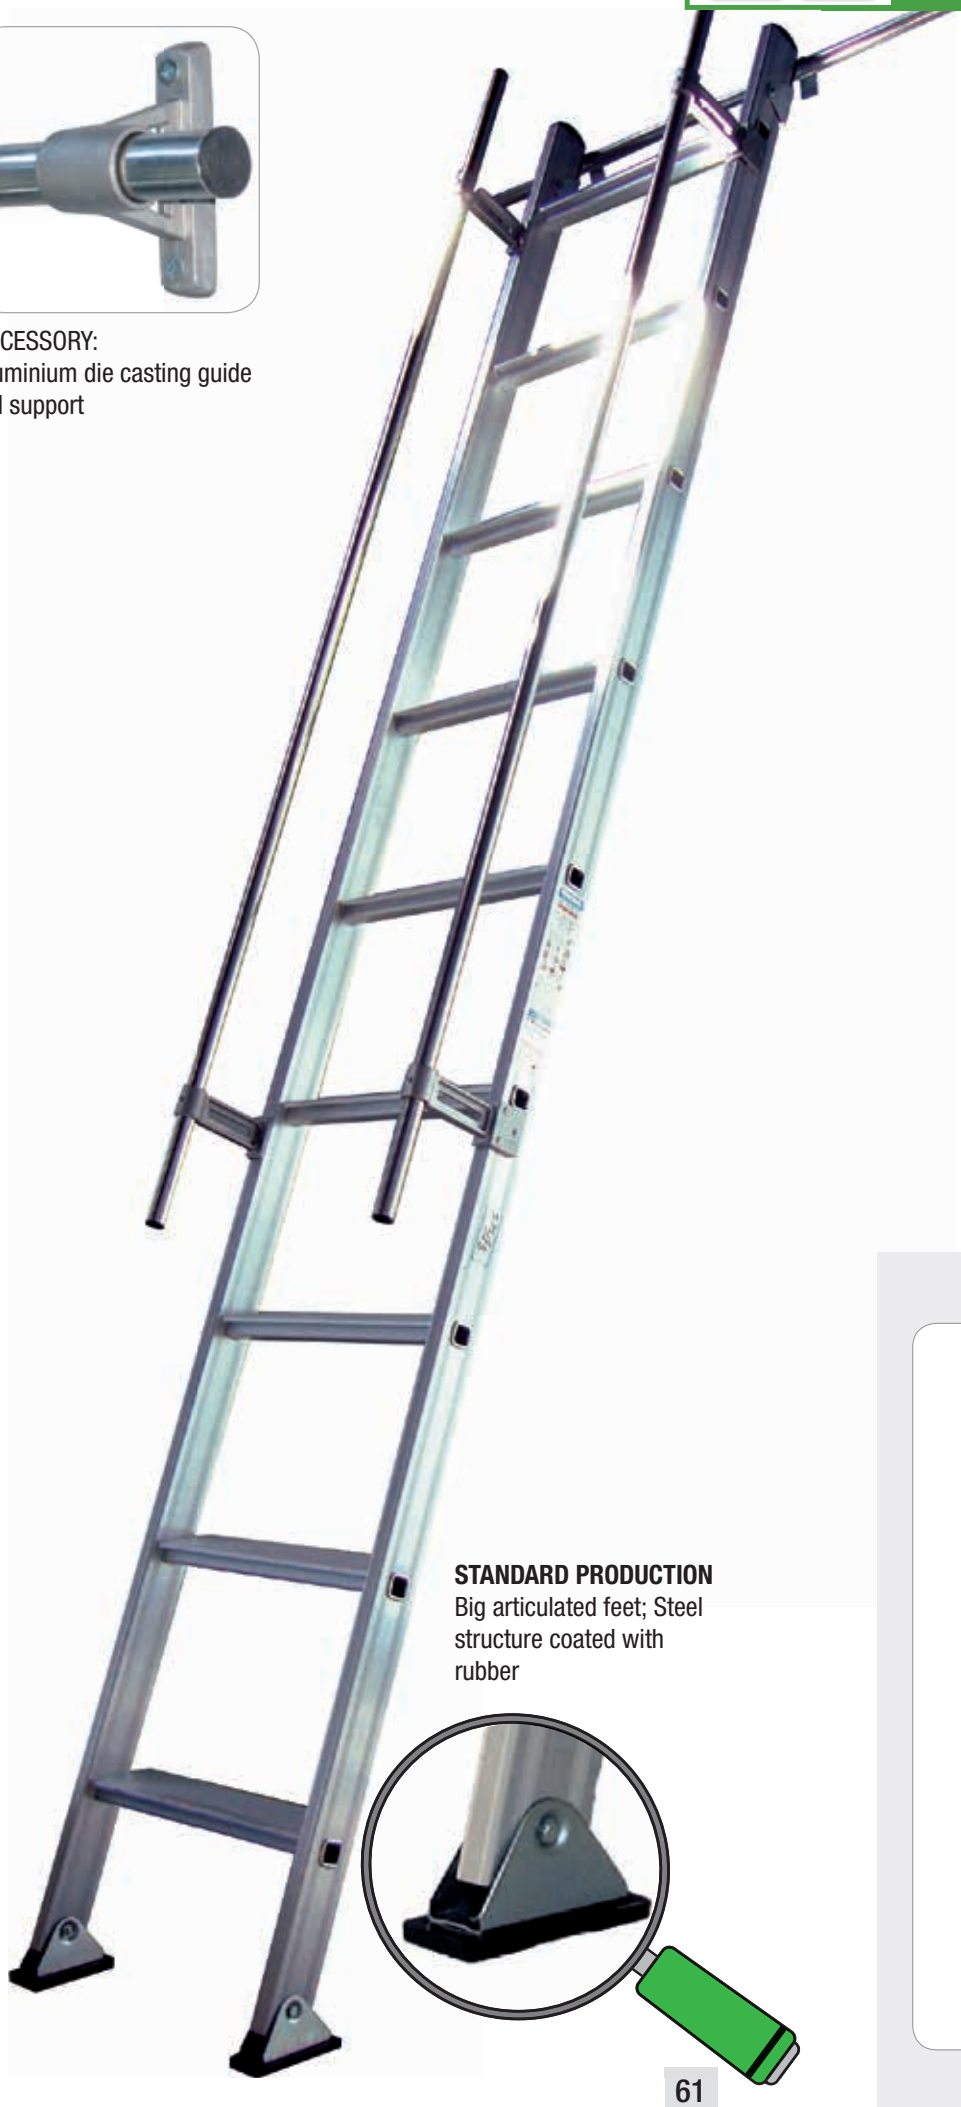

STANDARD PRODUCTION
Big articulated feet; Steel structure coated with rubber

150 kg MAX

EU EN131 EUROPEAN NORM

POLITECNICO MILANO 2012/3102 2012/3103

www.tuv.com TÜVRheinland ID: 1000000000 GS geprüfte Sicherheit

S 60080283

85 mm non-slip aluminium treads



Stile/tread connection through triple expansion and crimping

STANDARD PRODUCTION

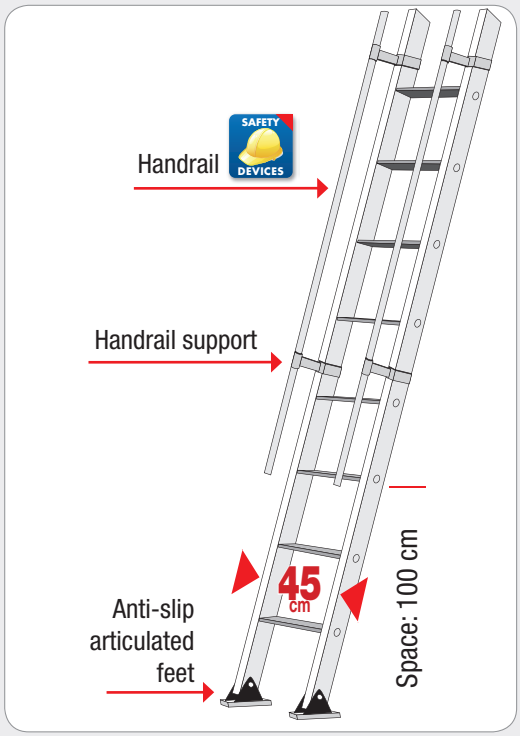

S15/2 System

- Aluminium shelf ladder.
- Front side with 60° slope for a more comfortable climbing.
- It can be fitted with various accessories.

Standard short hook
(Code FE-011)

Hook for parked position
(Code FE-010/1)

ACCESSORIES LIST

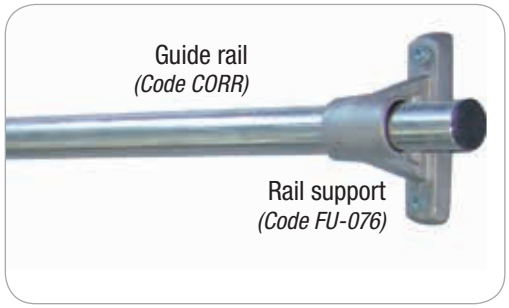

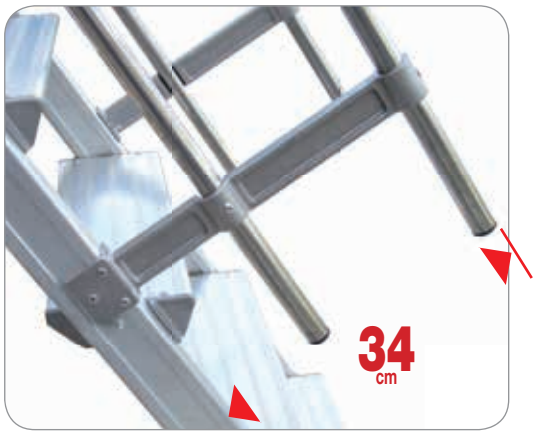

SAFETY DEVICES

Double handrail support
(Code FU-037

Code	treads number	A1 (cm)	A2 (cm)	A3 (cm)	B (cm)	(kg)	vol. (m³)	Ean
S15/21	6	175	275	145	105	13,0	0,15	8028406000303
S15/22	7	200	300	166	115	14,8	0,17	8028406000310
S15/23	8	225	325	187	120	16,7	0,20	8028406000327
S15/24	9	250	350	208	132	18,5	0,22	8028406000334
S15/25	10	275	375	229	144	20,4	0,24	8028406000341
S15/26	11	300	400	250	155	22,3	0,26	8028406000358
S15/27	12	325	425	272	162	24,1	0,29	8028406000365
S15/28	13	350	450	294	177	26,0	0,31	8028406000372
S15/29	14	375	475	316	190	27,8	0,33	8028406000389
S15/30	15	400	500	338	205	29,7	0,35	8028406000396
S15/31	16	425	525	360	226	31,5	0,38	8028406000402
S15/32-R	17	450	550	382	240	39,8	0,41	8028406106760
S15/33-R	18	475	575	404	254	42,5	0,44	8028406106777 *
S15/34-R	19	500	600	427	267	44,0	0,47	8028406106784 *

ACCESSORIES

FU-016	Fixed handrail support		8028406106463
FU-109	Folding handrail support		8028406106470
FU-076	Aluminium rail support		8028406106487
FU-037	Handrail double support		8028406106753
MAN	Ø 25 mm aluminium handrail		8028406106494
CORR	Ø 25 mm aluminium guide rail		8028406106500
FE-011	Standard short hook		8028406004134
FE-010/1	Hook for parked position		8028406106517
S15/D15	Welded spacers	pair	8028406106524
S15-MCSTD	Standard top handrails with clutches	pair	8028406106531
S15-MCVER	Vertical top handrails with clutches	pair	8028406106548
PL-228	Sliding castors with aluminium support	pair	8028406106555

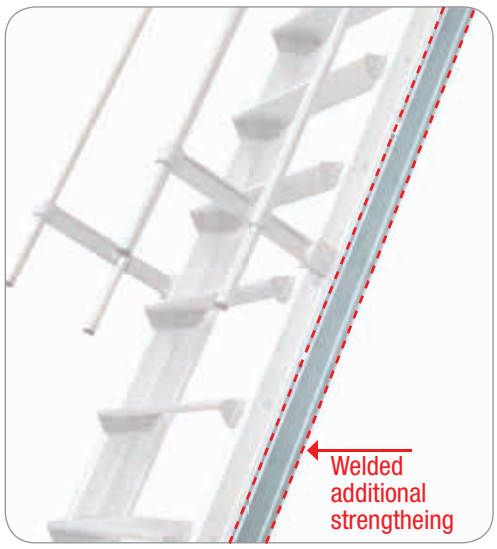

* Welded additional strengthening starting from S15/32

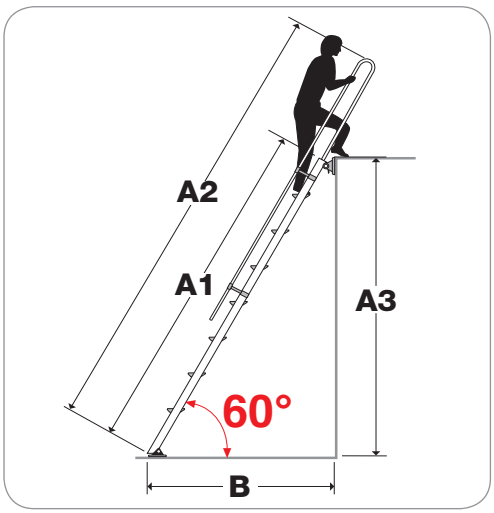

INTENSIVE USE

10-YEAR WARRANTY

MADE IN ITALY 100%

SUPER PRO 600 RANGE

150 kg MAX

EN131 EUROPEAN NORM

S 60080060

ACCESSORY:
Vertical top handrails



150 mm non-slip aluminium treads.
Exclusive stile/tread connection
through 10 points, without welding

STADARD PRODUCTION

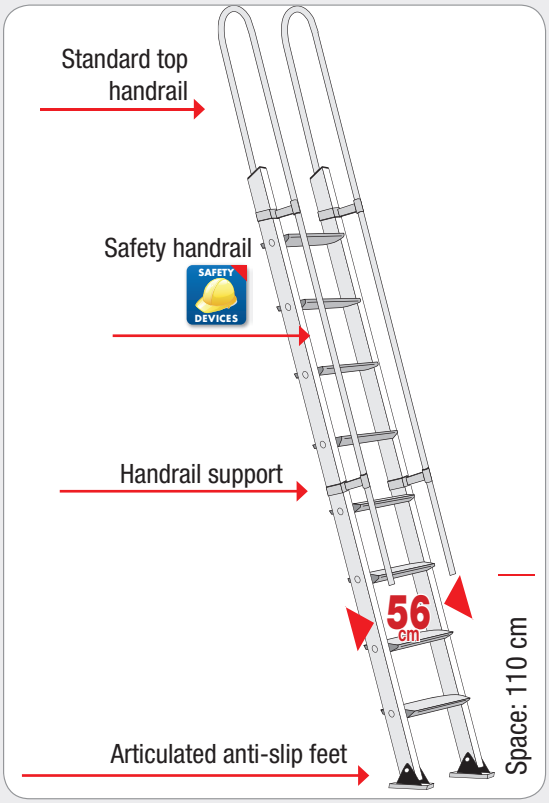

60° SLOPE
for a comfortable climbing

PLATEA

- Aluminium work platform.
- Telescopic stabilisers allow to work safely for long time on the platform.
- Easy to store, thanks to its compact design.

Big tool tray with a lot of tool spaces (10 kg loading)

Easy to move

Code	Treads number	(cm)	(cm)	(cm)	(cm)	(cm)	(cm)	(kg)	(m³)	Ean
PLT-03	2 + plat.	76	188	256	115	155	207	21,20	0,59	8028406105039
PLT-04	3 + plat.	103	216	283	133	160	237	22,20	0,68	8028406105046
PLT-05	4 + plat.	131	244	311	167	200	276	23,80	0,77	8028406105053
PLT-06	5 + plat.	159	272	339	171	225	297	25,60	0,86	8028406105060
PLT-07	6 + plat.	187	299	367	189	225	327	27,60	0,95	8028406105077

24x60 mm

67 cm

TOTAL SAFETY WITH FRONT, BACK AND SIDE PROTECTIONS

This product is delivered with a PVC wrap film and product leaflet

5-YEAR WARRANTY

MADE IN ITALY 100%

PRO 300 RANGE

150 kg MAX

EU EN131 EUROPEAN NORM

PLT-07: EN131+NF P93-352 2010/2020

PLT-03: EN131+NF P93-353 2010/2021

S 60080287



Big aluminium folding platforms with holes to keep it clean 40,5x51 cm

85 mm non-slip treads

Ø 150 mm back castors with steel support

BINARY

- Aluminium sliding warehouse step.
- Rail can be firmly fixed to wall or to a bearing structure.
- It easily runs on the track thanks to an aluminium die casting carriage composed by 12 bearings.
- Easy to assemble.

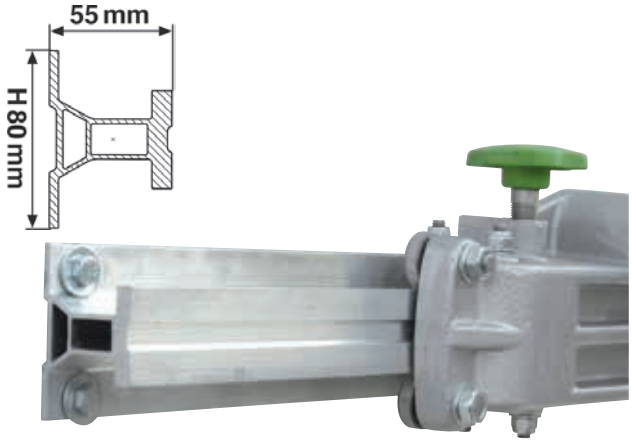

Aluminium die casting carriage composed by 12 bearings and 2 green screws

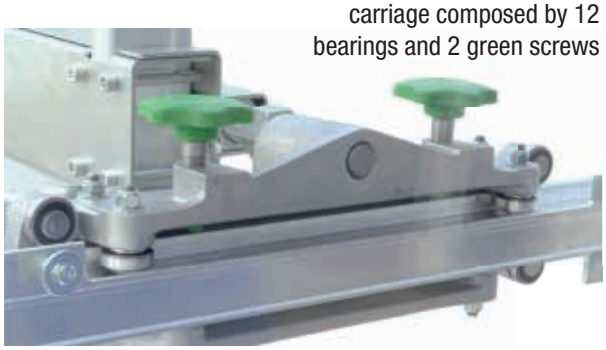

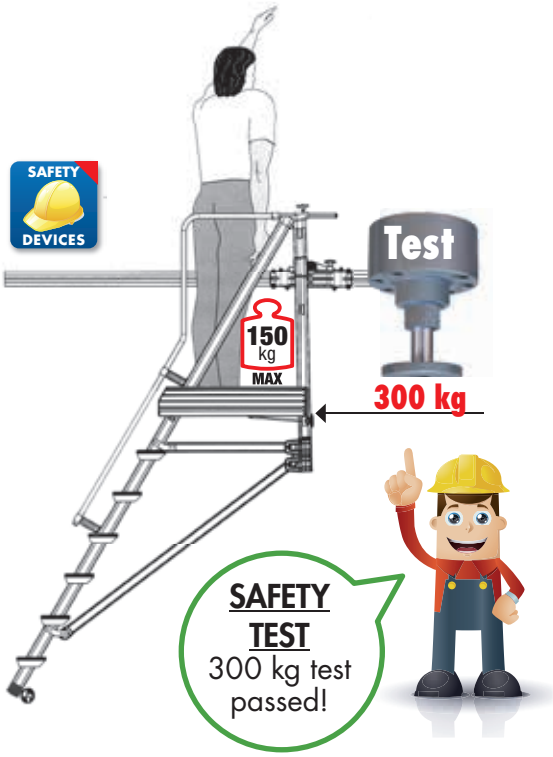

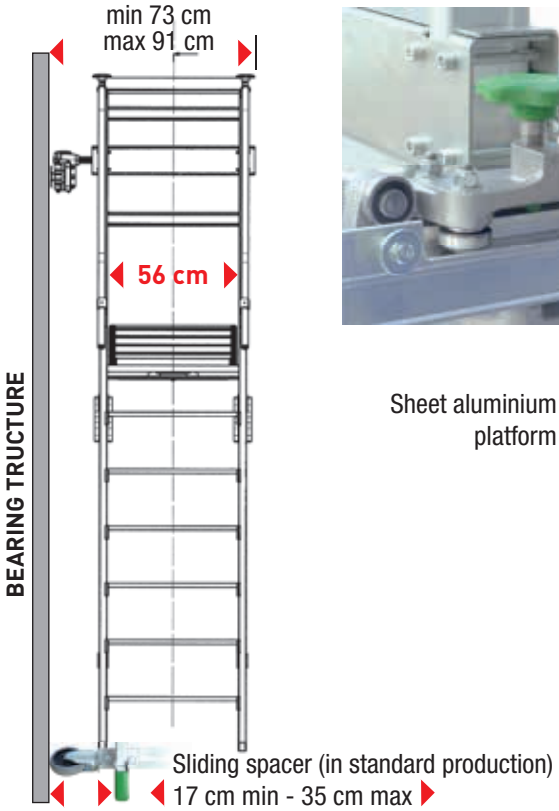

Sheet aluminium platform

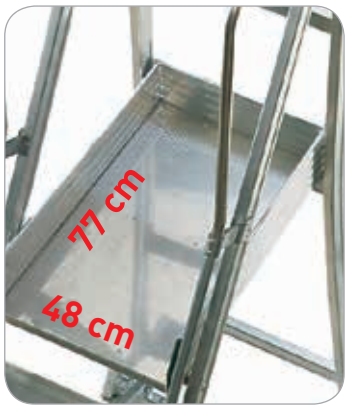

Code	treads number	(cm)	(cm)	(cm)	(cm)	(cm)	(cm)	(kg)	(m³)	Ean
CA-BY 0/75	3 + plat.	87	192	270	121,5	142	224	47,5	0,15	**8028406105725**
CA-BY 1/100	4 + plat.	108	213,6	290	134	154,5	249	54,9	0,20	**8028406105732**
CA-BY 2/125	5 + plat.	133	235,3	310	146,5	167,8	274	59,4	0,31	**8028406105749**
CA-BY 3/150	6 + plat.	154	259,5	330	159	179,5	299	64,0	0,40	**8028406105756**
CA-BY 4/175	7 + plat.	174,5	278,6	350	171,5	192	324	66,0	0,45	**8028406105763**
CA-BY 5/200	8 + plat.	195	300,2	380	184	204,5	340	70,0	0,50	**8028406105770**
CA-BY 6/225	9 + plat.	219	321,9	400	196,5	217	373	76,0	0,57	**8028406105787**
CA-BY 7/250	10 + plat.	239,5	343,5	420	209	229,5	399	81,0	0,70	**8028406105794**
BIN-CAST	Aluminium rail **weight: 2.45 Kg/m**									



INTENSIVE USE

10-YEAR WARRANTY

MADE IN ITALY 100%

SUPER PRO 600 RANGE

Aluminium tool tray in standard production

150 kg MAX

EU EN131 EUROPEAN NORM

www.tuv.com TÜVRheinland ID:7000000000 GS geprüfte Sicherheit

S 60080042

SAFETY DEVICES



150 mm non-slip aluminium treads. Exclusive stile/tread connection through 10 points, without welding

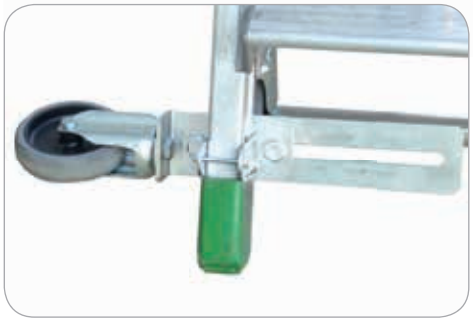

Adjustable sliding spacer 17 cm min – 35 cm max

DIVA

- Aluminium bridging platform.
- Platform railings on both sides.
- Big aluminium platform covered with non-slip Eurodeck wooden surface. Waterproof

Norma gestione ecosostenibile delle foreste FSC

Controlled by FACAL ®

It means: **FSC Norm - Environment respect**

SPECIAL VERSION WITH CASTORS

Provided with compulsory safety devices.
Not fixed to the ground

OPTIONAL ACCESSORIES

2 bases with Ø 125 turning castors with brake + 2 telescopic levellers

SAFETY DEVICES SAFETY:
2 compulsory anti-splay bars

Code	treads number	(cm)	(cm)	(cm)	(cm)	(kg)	(m³)	Ean
90X53 cm PLATFORM								
DIVA 2/90	2+2+Platform	67,9	278	169,4	125,6	32,00	0,20	8028406102687
DIVA 3/90	3+3+Platform	89,5	300	194,4	125,6	35,00	0,25	8028406102700
DIVA 4/90	4+4+Platform	111,2	320	219,4	150,6	36,50	0,30	8028406102724
DIVA 5/90	5+5+Platform	132,8	340	244,4	175,6	38,00	0,35	8028406102748
DIVA 6/90	6+6+Platform	154,5	360	269,4	200,6	39,50	0,40	8028406102762
DIVA 7/90	7+7+Platform	176,1	385	294,4	225,6	41,00	0,45	8028406102786
DIVA 8/90	8+8+Platform	197,8	405	319,4	250,6	42,50	0,50	8028406102809
120X53 cm PLATFORM								
DIVA 2/120	2+2+Platform	67,9	278	199,4	155,6	33,50	0,25	8028406102694
DIVA 3/120	3+3+Platform	89,5	300	224,4	155,6	36,80	0,30	8028406102717
DIVA 4/120	4+4+Platform	111,2	320	249,4	180,6	40,00	0,35	8028406102731
DIVA 5/120	5+5+Platform	132,8	340	274,4	205,6	42,80	0,40	8028406102755
DIVA 6/120	6+6+Platform	154,5	360	299,4	230,6	46,00	0,45	8028406102779
DIVA 7/120	7+7+Platform	176,1	385	324,4	255,6	49,00	0,50	8028406102793
DIVA 8/120	8+8+Platform	197,8	405	349,4	280,6	52,00	0,55	8028406102816
ACCESSORIES								
DIBS2-3/90	2 basis with castors + 2 levellers + 2 anti-splay bars (from 2 to 3 treads – 90 cm width)							8028406106791
DIBS4-8/90	2 basis with castors + 2 levellers + 2 anti-splay bars (from 4 to 8 treads – 90 cm width)							8028406106807
DIBS2-3/120	2 basis with castors + 2 levellers + 2 anti-splay bars (from 2 to 3 treads –120 cm width)							8028406106814
DIBS4-8/120	2 basis with castors + 2 levellers + 2 anti-splay bars (from 4 to 8 treads –120 cm width)							8028406106821



SUPER PRO 600 RANGE

10-YEAR WARRANTY

MADE IN ITALY 100%

SAFETY DEVICES

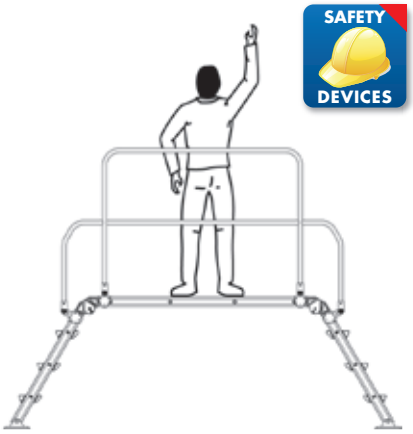

200 kg MAX



150 mm non-slip aluminium treads. Exclusive stile/tread connection through 10 points, without welding

SAFETY DEVICES Fixing to ground

Aluminium die casting hinge

10-YEAR WARRANTY

MADE IN ITALY 100%

ALFA

- Aluminium folding work platform.
- Suitable for maintenance works.
- 4 automatic steel hinges.
- Big aluminium platform with non-slip Eurodeck wooden surface. Waterproof.

Norma gestione ecosostenibile delle foreste FSC

Controlled by FACAL ®

It means: **FSC Norm - Environment respect**

150 kg MAX

www.tuv.com TÜVRheinland ID:1000000000 GS geprüfte Sicherheit

S 60011137

30x30 mm square rungs

Platform width – 50 cm
Platform length – 160 cm or 220 cm

Easy to carry

Code	(cm)	(cm)	(cm)	(cm)	(cm)	(kg)	(m³)	Ean
ALFA1	69	259	137	196	160	18,4	0,12	8028406102304
ALFA2	69	259	198	256	220	22,0	0,15	8028406102311
ALFA3	98	288	198	271	220	23,8	0,15	8028406102328
BA-F93	92 cm stabiliser bar (spare part)							8028406106838

This product is delivered with a PVC wrap film and product leaflet

LEANING LADDERS

COMBINATION LADDERS

ROPE-OPERATED EXTENSION LADDERS / EXTENSION LADDERS

TELESCOPIC LADDERS / MULTIPURPOSE LADDERS

STEPLADDERS / DOUBLE-SIDED STEPLADDERS / SPECIAL LADDERS

WAREHOUSE STEPS / SHELF LADDERS / WORK PLATFORMS / BRIDGING PLATFORMS / FOLDING WORK PLATFORMS

VERTICAL LADDER WITH SAFETY CAGE

ALUMINIUM ACCESS TOWERS / SCAFFOLDINGS

STEEL ACCESS TOWERS / SCAFFOLDINGS

STEP STOOLS / SAWHORSES

HOUSEHOLD STEPLADDERS

LOADING RAMPS / GANGWAYS

STANDS & GRAPHICS

ACCESSORIES AND SPARE PARTS

SUPER PRO 600 RANGE

SECURITY system

- Aluminium vertical ladder equipped with rear safety cage to prevent fallings down.
- Ladders and safety cages are firmly connected through a system of double joint hoops. No welding are used.
- **SECURITY SYSTEM** ladders are particularly suitable to access to fixed structures such as industrial buildings, plants, silos and machineries and in general wherever the periodic inspection is required.
- Vertical safety cage ladder can be composed by only one single-section (up to 10 m. height) or by multi-sections. If a single-section exceeds 10,00 m. height, a change of flight will be necessary every 6 m. complying with the European Norm 14122-4.
- **SECURITY SYSTEM** is organized in modules in order to simplify the handling of the single components in the warehouse. Accessories are also available to customize the ladder according to the user's needs.
- The structure can be completely dismantled for transport and storage.

TECHNICAL FEATURES

- Aluminium ladder: 6 different sizes are available.
- External width: 450 mm.
- Stile size: 25x65 mm.
- 30x30 mm non-slip rungs.
- Rung spacing: 300 mm .
- Safety cage made up by double ribbed aluminium hoops.
- Directly fastening into the wall or through expansion screws.
- Rapid and intuitive fastening through nylon joints and square head screws.

SAFETY DEVICES

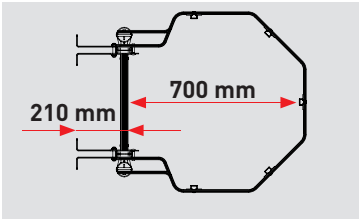

EUROPEAN NORM
EN 14122-4

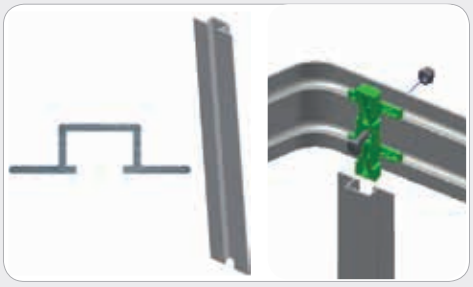

Vertical ribbed profile for safety cage

Fastening bracket: ladder and safety cage connection

10-YEAR WARRANTY

MADE IN ITALY 100%

SUPER PRO 600 RANGE

150 kg MAX

EN14122-4 EUROPEAN NORM

CERTIFIED BY TÜV SUD

SAFETY DEVICES

EN 14122-4 max 3,00 m

EN 14122-4 min. 2,30 m

The vertical safety cage ladder assembly must de done by specialized staff. Our responsibility only covers material supply

THE SYSTEM

MAIN COMPONENTS: CAGES

LADDER

Without wall brackets

Code	rungs number	(mm)	(kg)	(m³)	Ean
SG 180	6	1795	3,2	0,052	8028406105800
SG 210	7	2095	3,8	0,062	8028406105817
SG 240	8	2395	4,2	0,070	8028406105824
SG 270	9	2695	4,6	0,079	8028406105831
SG 300	10	2995	5,2	0,088	8028406105848
SG 330	11	3295	5,8	0,097	8028406105855

Wall brackets every 2 m

SAFETY CAGE (including fasteners)

Fastening bracket: Ladder and safety cage connection

EN 14122-4 EUROPEAN NORM

GA 388/EN	-	388	6,1	0,047	8028406106203
GA 688/EN	-	688	7,2	0,080	8028406106210
GA 1726/EN	-	1726	13,0	0,210	8028406106227
GA 2026/EN	-	2026	14,2	0,250	8028406106234
GA 2326/EN	-	2326	15,2	0,280	8028406106241
GA 2626/EN	-	2626	16,2	0,320	8028406106258
GA 2926/EN	-	2926	17,2	0,350	8028406106265
GA 3226/EN	-	3226	20,4	0,380	8028406106272

LADDER + CAGE

Without wall brackets

EN 14122-4 EUROPEAN NORM

SGA 180/EN	6	1795	16,2	0,270	8028406106296
SGA 210/EN	7	2095	18,0	0,320	8028406106319
SGA 240/EN	8	2395	19,4	0,350	8028406106333
SGA 270/EN	9	2695	20,8	0,400	8028406106357
SGA 300/EN	10	2995	22,4	0,440	8028406106371
SGA330/EN	11	3295	26,2	0,480	8028406106395

Wall brackets every 2 m

MAIN COMPONENTS: EXIT MODULES

SIMPLE EXIT MODULE

Without wall brackets

Code	kg	m³
GA-SB714/EN	21,5	0,36

EXIT MODULE WITH RAIL

Without wall brackets

Code	kg	m³
GA-SB714P/EN	24	0,5

EXIT MODULE WITH GATE

Without wall brackets

Code	kg	m³
GA-SB714C/EN	22,5	0,36

EXIT MODULE WITH RAIL AND GATE

Gate included

Without wall brackets

Code	kg	m³
GA-SB714PC/EN	25	0,5

BASELINE DIMENSIONS

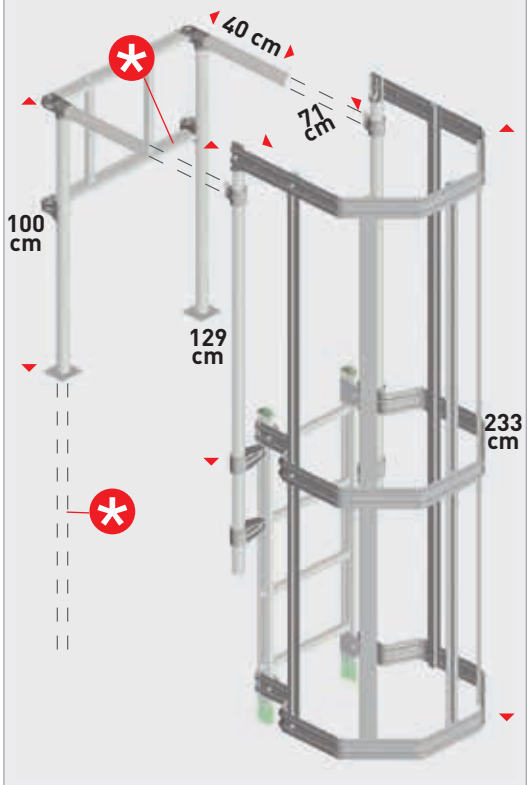

Customized designs are available on demand

CHANGE OF FLIGHT MODULE WITH LADDERS

Without wall brackets

Code	kg	m³
GA-MSD/EN	39	0,60

MAIN COMPONENTS: WALL BRACKETS

Vertical space between wall brackets should not be more than **2,00** m.

Wall bracket 1 **FE-165**	**Fix**: Length 22,8 cm Distance between wall and rung: 18 cm Fastening into the wall through expansion screws (not included)	
Wall bracket 2 **FE-166**	**Fix**: Length 32,5 cm Distance between wall and rung: 22 cm Cemented into the wall	
Wall bracket 3 **STA165/315**	**Adjustable** : Length min 16,5 cm, max 30 cm Fastening into the wall through expansion screws (not included)	
Wall bracket 4 **STA265/380**	**Adjustable** : Length min 26,5 cm, max 38 cm Fastening into the wall through expansion screws (not included)	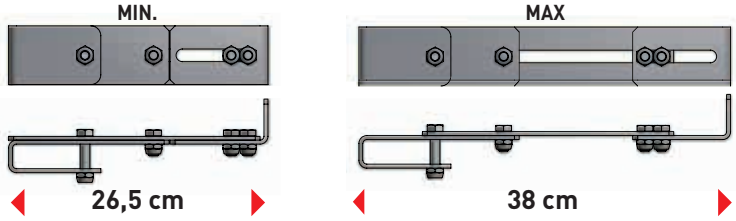
Wall bracket 5 **STA350/450**	**Adjustable** : Length min 35 cm, max 45 cm Fastening into the wall through expansion screws (not included)	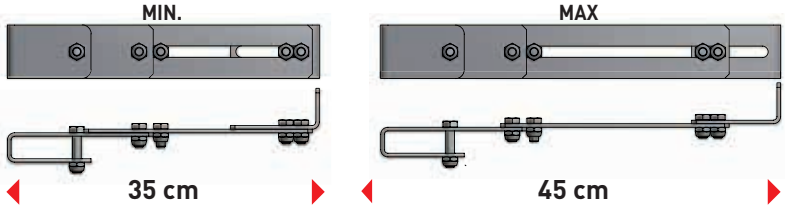
Wall bracket 6 **STA430/530**	**Adjustable** : Length min 43 cm, max 53 cm Fastening into the wall through expansion screws (not included)	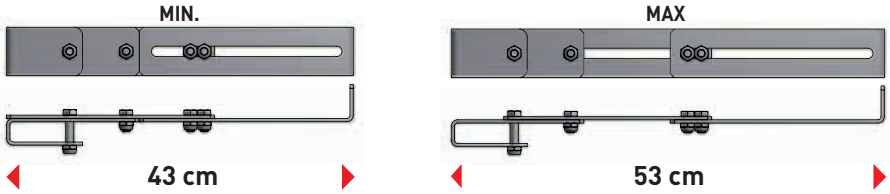
Wall bracket 7 **STA520/670**	**Adjustable** : Length min 52 cm, max 67 cm Fastening into the wall through expansion screws (not included)	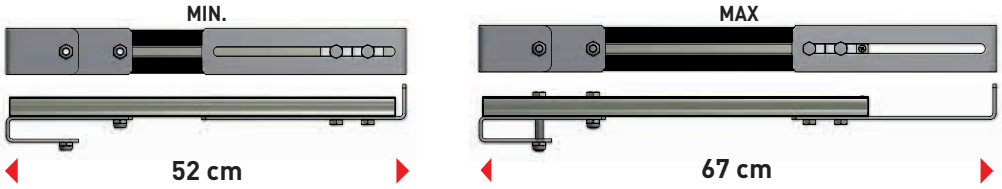
Wall bracket 8 **FE-170**	**Fix**: To use under the rest platform. Fastening into the wall through expansion screws (not included)	

WALL BRACKETS

Including screws, without expansion screws

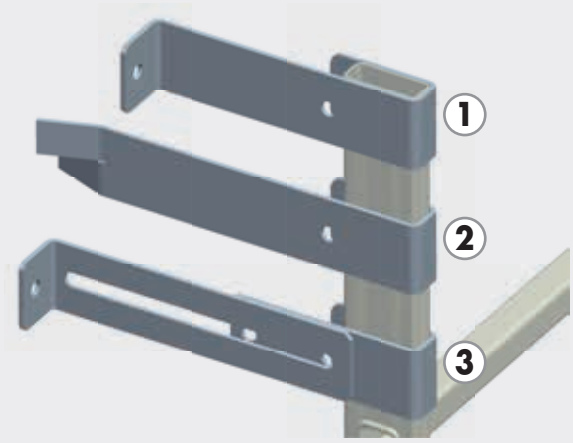

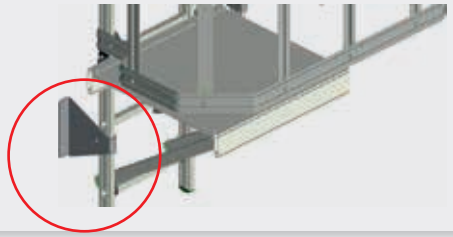

MAIN COMPONENTS

ANTI-INTRUSION GATE (aluminium and stainless steel + lock holder)

Code	kg	m³
GA-INTRUSIONE	3,6	0,024

ACCESS TELESCOPIC LADDER WITH HOOKS (Briko 5+5)

Code	kg	m³
BK4/2G	7,00	0,08

ACCESS FIX LADDER WITH HOOKS h 2,76 m (Stilo)

Code	kg	m³	Pieces
SL-09/G	3,4	0,047	1

OTHER COMPONENTS / SPARE PARTS

EXIT GATE HINGE
Code FU-124

EXIT HOOP SUPPORT
Code FU-127

EXIT RAIL CONNECTOR
Code FU-126

EXIT VERTICAL RAIL SUPPORT
Code FU-128



Angle bracket for diagonal/ platform connection
Code FE-171

Angle bracket for threaded bar/platform connection
Code FE-169

Bracket for ladder's stile connection
Code FE-164

Square head screw 8x20
Code VI-137

Exit gate
Code GA-CANC714
kg: 2; m³: 0,01

Nylon joint
Code PL-334
kg: 0,03

Coated steel connector for ladder
Code PL-300
kg: 0,26

Standard cage hoop

Code	kg
ANSTD/EN	1,6

Exit hoop

Code	kg
ANSB714/EN	1,6

Double hoop for rest platform

Code	kg
2AN/EN	2,2

Cage vertical profile



Code	(mm)	(kg)	Ean
GA-V386	386	0,260	8028406105985
GA-V686	686	0,460	8028406105992
GA-V1724	1724	1.140	8028406106005
GA-V2024	2024	1,340	8028406106012
GA-V2324	2324	1,530	8028406106029
GA-V2624	2624	1,730	8028406106036
GA-V2924	2924	1,930	8028406106043
GA-V3224	3224	2,120	8028406106050

EN14122-4
EUROPEAN NORM

POSSIBLE COMPOSITIONS

LANDING HEIGHT			from m to m	3,30 3,60	3,60 3,90	3,90 4,20	4,20 4,50	4,50 4,80	4,80 5,10	5,10 5,40	5,40 5,70	5,70 6,00	6,00 6,30	6,30 6,60	6,60 6,90
CODE	DESCRIPTION	KG		PIECES	PIECES	PIECES	PIECES	PIECES	PIECES	PIECES	PIECES	PIECES	PIECES	PIECES	PIECES
SG180	Ladder m.1.80 width 450 - 6 rungs	3,2						2	1	1	1				
SG210	Ladder m.2.10 width 450-7 rungs	3,8							1			1			
SG240	Ladder m.2.40 width 450 -8 rungs	4,2		1						1			1		
SG270	Ladder m.2.70 width 450 -9 rungs	4,6			1						1	1	1	2	1
SG300	Ladder m.3.00 width 450 -10 rungs	5,2				1									1
SG330	Ladder m.3.30 width 450 -11 rungs	5,8					1								
GA388/EN	Safety cage mm 388	6,1				1		1							
GA688/EN	Safety cage mm 688	7,2					1	1	2						
GA1726/EN	Safety cage mm 1726	13,0								1	1				
GA2026/EN	Safety cage mm 2026	14,2										1			
GA2326/EN	Safety cage mm 2326	15,2											1		
GA2626/EN	Safety cage mm 2626	16,2												1	
GA2926/EN	Safety cage mm 2926	17,2													1
GA3226/EN	Safety cage mm 3226	20,4													
GA-SB714/EN	Exit module width 714	21,5		1	1	1	1	1	1	1	1	1	1	1	1
GA-MSD/EN	Change of flight module with rest platform	39,0													
FE-165	Standard fastening bracket for ladder	0,72		6	6	6	6	6	8	8	8	8	8	8	8
PL-300	Coated steel connector 25x65 + screws	0,26		2	2	2	2	4	4	4	4	4	4	4	4
COMPOSITION CODE				S330EN	S360EN	S390EN	S420EN	S450EN	S480EN	S510EN	S540EN	S570EN	S600EN	S630EN	S660EN

LANDING HEIGHT			from m to m	11,70 12,00	12,00 12,30	12,30 12,60	12,60 12,90	12,90 13,20	13,20 13,50	13,50 13,80	13,80 14,10	14,10 14,40	14,40 14,70	14,70 15,00	15,00 15,30
CODE	DESCRIPTION	KG		PIECES	PIECES	PIECES	PIECES	PIECES	PIECES	PIECES	PIECES	PIECES	PIECES	PIECES	PIECES
SG180	Ladder m.1.80 width 450 - 6 rungs	3,2			2	2	2	4	3	3	3	2	2	2	2
SG210	Ladder m.2.10 width 450 - 7 rungs	3,8							1			1			
SG240	Ladder m.2.40 width 450 - 8 rungs	4,2								1			1		
SG270	Ladder m.2.70 width 450 - 9 rungs	4,6		2	1						1	1	1	2	1
SG300	Ladder m.3.00 width 450 -10 rungs	5,2		1		1									1
SG330	Ladder m.3.30 width 450 - 11 rungs	5,8					1								
GA388/EN	Safety cage mm 388	6,1			1	1	1	1	1						
GA688/EN	Safety cage mm 688	7,2			1	1	1	1	1						
GA1726/EN	Safety cage mm 1726	13,0						2	2	3	3	2	2	2	2
GA2026/EN	Safety cage mm 2026	14,2										1			
GA2326/EN	Safety cage mm 2326	15,2											1		
GA2626/EN	Safety cage mm 2626	16,2		1	1									1	
GA2926/EN	Safety cage mm 2926	17,2		1		1									1
GA3226/EN	Safety cage mm 3226	20,4					1								
GA-SB714/EN	Exit module width 714	21,5		1	1	1	1	1	1	1	1	1	1	1	1
GA-MSD/EN	Change of flight module with rest platform	39,0		1	2	2	2	2	2	2	2	2	2	2	2
FE-165	Standard fastening bracket for ladder	0,72		10	8	8	8	8	8	8	8	10	10	10	10
PL-300	Coated steel connector 25x65 + screws	0,26		6	6	6	6	8	8	8	8	8	8	8	8
COMPOSITION CODE				S1170EN	S1200EN	S1230EN	S1260EN	S1290EN	S1320EN	S1350EN	S1380EN	S1410EN	S1440EN	S1470EN	S1500EN

	6,90 7,20	7,20 7,50	7,50 7,80	7,80 8,10	8,10 8,40	8,40 8,70	8,70 9,00	9,00 9,30	9,30 9,60	9,60 9,90	9,90 10,20	10,20 10,50	10,50 10,80	10,80 11,10	11,10 11, 40	11,40 11,70
	PIECES	PIECES	PIECES	PIECES	PIECES	PIECES	PIECES	PIECES	PIECES	PIECES	PIECES	PIECES	PIECES	PIECES	PIECES	PIECES
		2	1								1	1	1	1		
			1	2	1						1				1	
					1	2	1					1				1
	1	1	1	1	1	1	2	3	2	1	1	1	2	1	1	1
									1	2				1	1	1
	1															
		2	1								1	1	1	1		
			1	2	1						1				1	
					1	2	1					1				1
							1	2	1				1			
									1	2				1	1	1
	1															
	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
											1	1	1	1	1	1
	10	10	10	10	10	10	10	12	12	12	10	10	10	10	10	10
	4	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
	S690EN	S720EN	S750EN	S780EN	S810EN	S840EN	S870EN	S900EN	S930EN	S960EN	S990EN	S1020EN	S1050EN	S1080EN	S1110EN	S1140EN

	15,30 15,60	15,60 15,90	15,90 16,20	16,20 16,50	16,50 16,80	16,80 17,10	17,10 17,40	17,40 17,70	17,70 18,00	18,00 18,30	18,30 18,60	18,60 18,90	18,90 19,20	19,20 19,50	19,50 19,80	19,80 20,10
	PIECES	PIECES	PIECES	PIECES	PIECES	PIECES	PIECES	PIECES	PIECES	PIECES	PIECES	PIECES	PIECES	PIECES	PIECES	PIECES
	1	1	1					2	2							
				1						2	1					
	1				1	1	1	1			1	2	1			
	2	3	2	2	2	1	1	1	2	1	1	1	2	3	2	1
			1	1	1	2	1	1	1	1	1	1	1	1	2	3
							1									
	1	1	1					2	2							
				1						2	1					
	1				1	1	1	1			1	2	1			
	1	2	1	1	1				1				1	2	1	
			1	1	1	2	1	1	1	1	1	1	1	1	2	3
							1									
	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	2	2	2	2	2	2	2	2	2	3	3	3	3	3	3	3
	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12
	8	8	8	8	8	8	8	10	10	8	8	8	8	8	8	8
	S1530EN	S1560EN	S1590EN	S1620EN	S1650EN	S1680EN	S1710EN	S1740EN	S1770EN	S1800EN	S1830EN	S1860EN	S1890EN	S1920EN	S1950EN	S1980EN

SCAFFOLDINGS – User guide

EN 1004 Norm FACAL Symbol = EN1004 EUROPEAN NORM

1 Working mobile towers shall be erected and dismantled only by competent persons. The producer's manual shall be followed.

2 Check that all components are undamaged and they are functioning correctly. Damaged or incorrect components shall not be used.

3 You only shall use original components as indicated by the manufacturer. You can ask them to the authorised retailer.



4 The surface on which the mobile tower is moved shall be able to support the structure. Be careful to uneven or soft grounds.

5 No persons or materials should be on the tower during movements.

6 Mobile towers shall only be moved manually and always on flat, solid and unhindered surface. Be careful to grids, manholes and raised curbs. By the moving you shouldn't overcome the normal walking speed.

7 Before using the mobile tower please verify that it has been assembled according to the manufacturer instructions. Make sure that the mobile tower is vertical and perfectly levelled.

8 The mobile tower shall not be lifted or suspended.

9 It is not allowed to bridge between a mobile tower and a building.



10 Before the use, you shall verify that all safety measures to avoid an accidental displacement has been taken, as for instance by applying locking brakes or adjustable bases.



11 Towers must always be climbed from the inside.

12 It is not allowed to jump onto tower's platforms'.

13 Where possible, tie in the tower to a rigid structure when working outdoors or in exposed conditions.

LEANING LADDERS

COMBINATION LADDERS

ROPE-OPERATED EXTENSION LADDERS / EXTENSION LADDERS

TELESCOPIC LADDERS / MULTIPURPOSE LADDERS

STEPLADDERS / DOUBLE-SIDED STEPLADDERS / SPECIAL LADDERS

WAREHOUSE STEPS / SHELF LADDERS / WORK PLATFORMS / BRIDGING PLATFORMS / FOLDING WORK PLATFORMS

VERTICAL LADDER WITH SAFETY CAGE

ALUMINIUM ACCESS TOWERS / SCAFFOLDINGS

STEEL ACCESS TOWERS / SCAFFOLDINGS

STEP STOOLS / SAWHORSES

HOUSEHOLD STEPLADDERS

LOADING RAMPS / GANGWAYS

STANDS & GRAPHICS

ACCESSORIES AND SPARE PARTS

DOGE65

- Aluminium professional scaffold tower.
- Quick assembling.
- Stiles sizes: 25x65 mm.
- Aluminium structure. Non-slip and waterproof surface. Melamine Eurodeck wood.

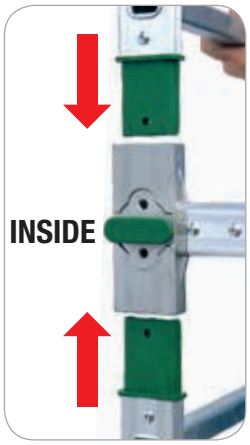

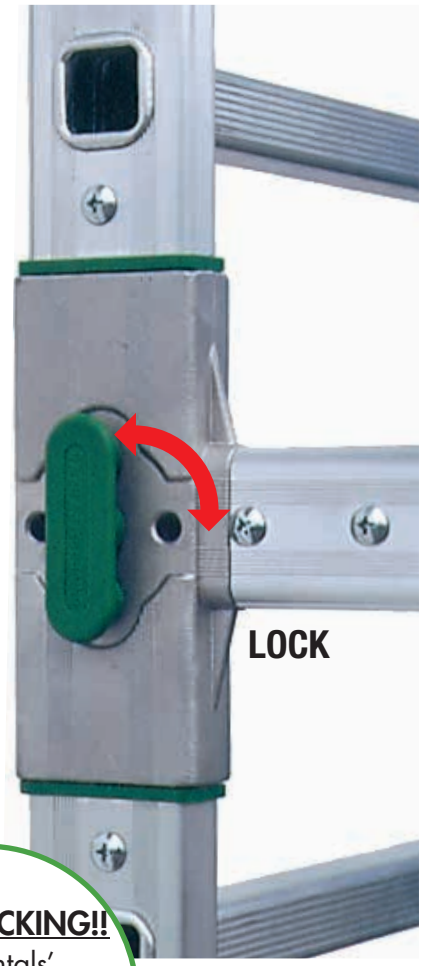

QUICK LOCKING!!
horizontals' aluminium die casting crosses that joint the structure to each extension pack

Norma gestione ecosostenibile delle foreste FSC

Controlled by FACAL®

It means: **FSC Norm - Environment respect**

Vertical joints with steel structure inside

Base element with aluminium die casting castor support and levellers. Spirit-level to check the stability

10-YEAR WARRANTY

MADE IN ITALY 100%

SUPER PRO 600 RANGE

BASE:
94x170 cm

STRUCTURE:
85x164 cm

PLATFORM:
76,5x153 cm

CLASS 3

200 kg/m²: EN 1004

235 kg MAX

Maximum working height
10,30 m

EU

EN1004
EUROPEAN NORM

www.tuv.com TÜVRheinland ID:1000000000 GS geprüfte Sicherheit

S 60080285

POLITECNICO MILANO

2001/1671

30x30 mm square rungs

SAFETY DEVICES

Safety:
Diagonals instant locking system through stainless steel springs

Ballasts

MAIN COMPONENTS



BASE PACK
Code D650
kg: 17 vol.: 0,15 m³
Packages:2
EAN 8028406090076



EXTENSION PACK 1200 h. – 4 rungs
Code D652
kg: 14,5 vol.: 0,20 m³
Packages:2
EAN 8028406090113



EXTENSION PACK 1800 h. – 6 rungs
Code D651
kg: 18 vol.: 0,25 m³
Packages:2
EAN 8028406090083



PLATFORM SAFETY KIT
Code D670
kg: 6,6 vol.: 0,02 m³
Packages:1
EAN 8028406003380



DOUBLE PLATFORM with toe board
Code D664
Aluminium toe bard ¾ with trapdoor + ¼ fix
Max. load 200 kg/m³
kg: 24,5 vol.: 0,12 m³
Packages:2
EAN 8028406090106



DOUBLE PLATFORM
Code D671
Usable just to pass through: ¾ with trapdoor + ¼ fix
Max. load 200 kg/m³
kg: 18,4 vol.: 0,09 m³
Packages:1
EAN 8028406090328

SMALL STABILISER
Code D660
4 pcs with clamps
kg: 4 (x 4pcs.)
vol.: 0,013 m³, Packages:2
EAN 802840603359



BIG STABILISER
Code D661
4 pcs with clamps
kg: 6,8 (x 4pcs.)
vol.: 0,016 m³ , Packages:2
EAN 8028406090090

MAXI STABILISER
Code D662
4 pcs with clamps
kg: 12 (x 4pcs.)
vol.: 0,12 m³ , Packages: 2
EAN 8028406003366

LEVELLER
Code D675
4 pcs.
kg: 10 (x 4pcs.)
vol.: 0,02 m³ , Packages:1
EAN 8028406003373

OTHER COMPONENTS

BASE ELEMENT
Code D659
kg: 6,5 vol.: 0,02 m³
EAN 8028406003236



BASE ELEMENT with spirit level
Code D678
kg: 6,5 vol.: 0,02 m³
EAN 8028406107699

FINAL SAFETY HORIZONTAL BRACE
Code D658
kg: 1,5 vol.: 0,02 m³
EAN 8028406003335

LADDER FRAME 1200 (4 rungs)
Code D654
kg: 3,4 vol.: 0,06 m³
EAN 8028406003243

LADDER FRAME 1800 (6 rungs)
Code D653
kg: 4,5 vol.: 0,09 m³
EAN 8028406003250

BASE HORIZONTAL BRACE
Code D655-B
kg: 2 vol.: 0,01 m³
EAN 8028406003267

SIDE HORIZONTAL BRACE
Code D655
kg: 2 vol.: 0,01 m³
EAN 8028406003274

EXTENSION PACK DIAGONAL BRACE 1200 mm
Code D657
kg: 1 vol.: 0,01 m³
EAN 8028406003281

EXTENSION PACK DIAGONAL BRACE 1800 mm
Code D656
kg: 1 vol.: 0,01 m³
EAN 8028406003298

ALUMINIUM LADDER (210x39 cm)
Code D210/S
kg: 4 vol.: 0,04 m³
EAN 8028406003328



DOUBLE PLATFORM
¾ With trapdoor
Code D666
kg: 10 vol.: 0,08 m³
EAN 8028406003304



PLATFORM ¼ Fix
Code D668
kg: 5,6 vol.: 0,03 m³
EAN 8028406003311



ALUMINIUM TOE BOARD
Code D669
kg: 6,1 vol.: 0,03 m³
EAN 8028406003342

BALLAST
Code D659-ZA
kg: 15 vol.: 0,08 m³
EAN 8028406003397



STAIRWELL POSITION DEVICES (without clamps)
Code D660-ZP
kg: 3 vol.: 0,01 m³,
Packages: 1
EAN 8028406003403

GUIDELINES FOR EUROPEAN NORM EN 1004 ACCES TOWERS WITH PLATFORMS AND ACCESSORIES

EN1004 EUROPEAN NORM

1- First platform shall be positioned at max. 4.40 m. from the ground.
The distance between following platforms shall be 4.00 m.
2- Platform safety kit is compulsory both on working platforms and pass-through platforms.
3- Toe board is compulsory just on the working platform.
4- For the assembly and dismantling of the scaffolding, at least **2 people are required**.

BE CAREFUL TO RULES!!
Read the attached user guide

Code DG6/1C

3,50 m
2,40 m
Assembling time 8 min.
Without ballast

Code DG6/2C

4,10 m
3,00
Assembling time 9 min.
Without ballast

Code DG6/3C

5,30 m
4,20
Assembling time 12 min.
With ballast 90 kg

Code DG6/4C



5,90 m
4,80
2,40
Assembling time 14 min.
With ballast 90 kg

Code DG6/5C



7,10 m
6,00
3,00
Assembling time 16 min.
With ballast 90 kg

Code DG6/6C



7,70 m
6,60
3,60
Assembling time 19 min.
With ballast 90 kg

Code DG6/7C



8,90 m
7,80
4,20
Assembling time 23 min.
With ballast 90 kg

Code DG6/8C



9,50 m
8,40
4,20
Assembling time 25 min.
With ballast 90 kg

		TOTAL HEIGHT m	3,50	4,10	5,30	5,90	7,10	7,70	8,90	9,50
		WORKING HEIGHT m	4,30	4,90	6,10	6,70	7,90	8,50	9,70	10,30
		LAST PLATFORM HEIGHT m	2,40	3,00	4,20	4,80	6,00	6,60	7,80	8,40
81/2008 DECRETO LEGISLATIVO	Code	Description	Pieces	Pieces	Pieces	Pieces	Pieces	Pieces	Pieces	Pieces
	D650	Base element	1	1	1	1	1	1	1	1
	D651	Extension pack 1800	1	2	2	3	3	4	4	5
	D652	Extension pack 1200	1		1		1		1	
	D661	4 big stabilisers with clamps				1	1	1	1	1
	D658	Safety kit	2	2	2	2	2	2	2	2
		Only structure — Code	DG6/1C	DG6/2C	DG6/3C	DG6/4C	DG6/5C	DG6/6C	DG6/7C	DG6/8C
		kg	52,5	56	70,5	80,8	95,3	98,8	113,5	117
		m³	0,65	0,70	0,90	0,95	1,15	1,20	1,40	1,46
		Packages	7	7	9	11	13	13	15	15
EN1004 EUROPEAN NORM	D664	Trapdoor platform with toe board	1	1	1	1	1	1	1	1
	D671	Trapdoor platform without toe board				1	1	1	1	1
	D670	Platform safety kit	1	1	1	2	2	2	2	2
		Structure including platforms — Code	DG6/1C EN	DG6/2C EN	DG6/3C EN	DG6/4C EN	DG6/5C EN	DG6/6C EN	DG6/7C EN	DG6/8C EN
		kg	83,6	87,1	101,6	136,9	151,4	154,9	169,6	173,1
		m³	0,82	0,85	1,04	1,20	1,40	1,45	1,65	1,80
		Packages	10	10	12	16	18	18	20	20

DOGE80

- Aluminium big-sized professional scaffold towers.
- Square rungs: 40x40 mm.
- Stiles size: 25x80 mm horizontals' aluminium die casting crosses that joint the structure to each extension pack.

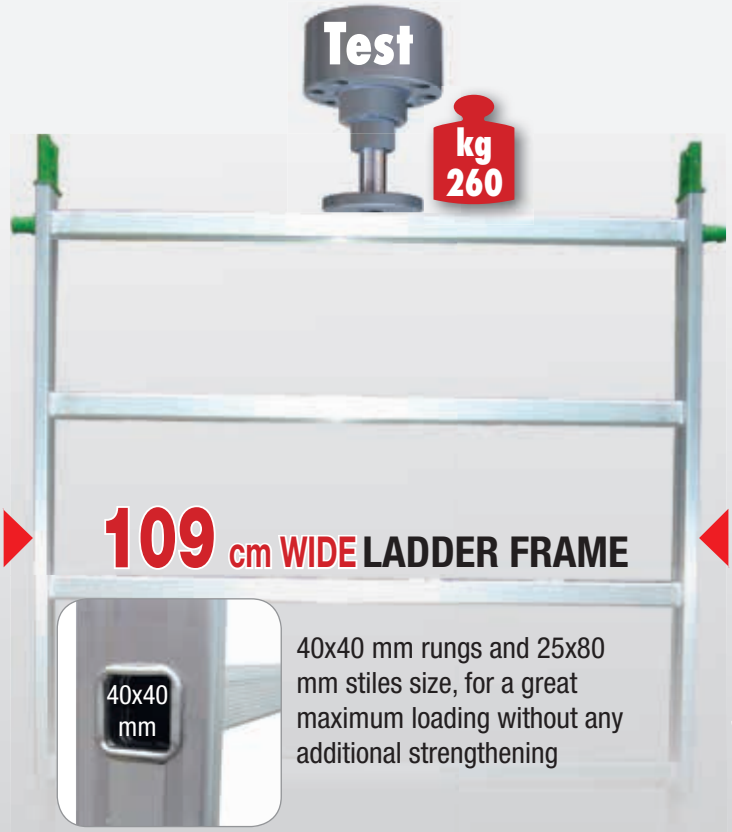

40x40 mm rungs and 25x80 mm stiles size, for a great maximum loading without any additional strengthening

110 cm big adjustable stabilisers

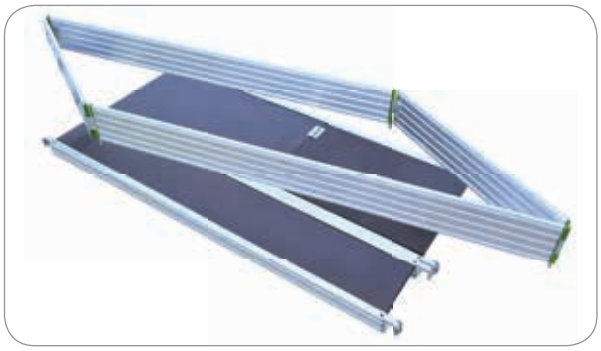

Aluminium structure. Non-slip and waterproof surface. Melamine Eurodeck wood

Norma gestione ecosostenibile delle foreste FSC — Controlled by FACAL®

It means: **FSC Norm - Environment respect**

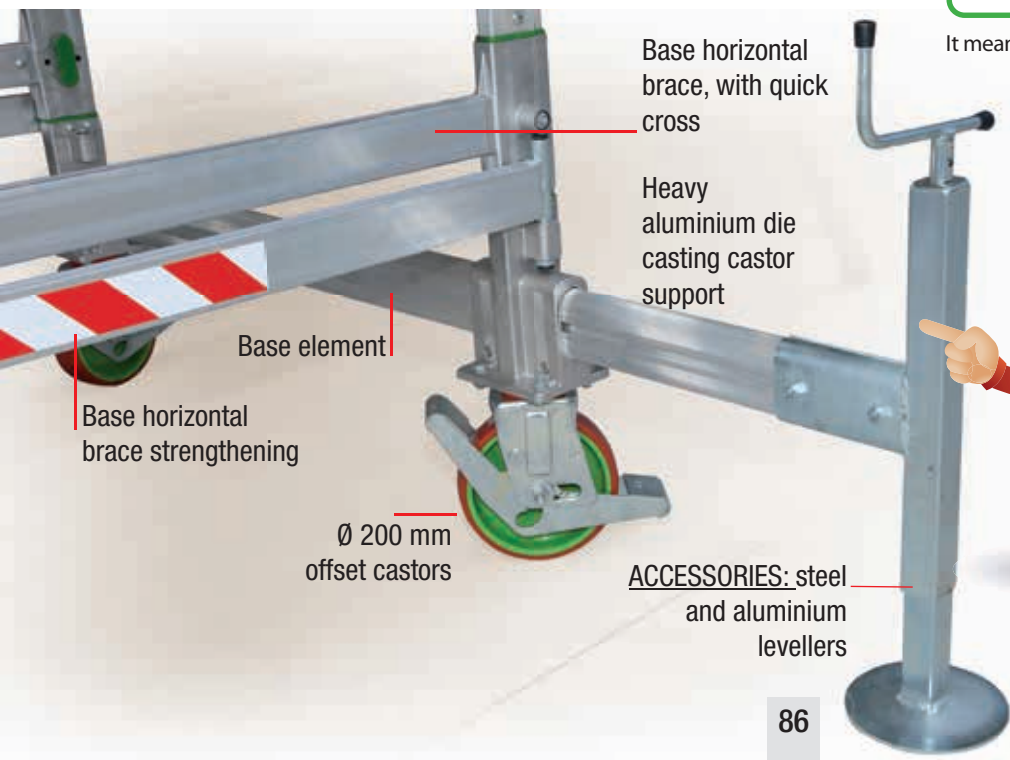

10-YEAR WARRANTY

MADE IN ITALY 100%

SUPER PRO 600 RANGE

BASE:
122x218 cm

STRUCTURE:
109x214 cm

PLATFORM:
100x201 cm

CLASS 3

200 kg/m²: EN 1004

400 kg MAX

Maximum working height
13,40 m

EN1004
EUROPEAN NORM
Without ballast

S 60080285

N. 2001/1670

40x40 mm square rungs

SAFETY DEVICES

Safety:
Strong clamps lock the stabilisers

SAFETY DEVICES

Safety:
Diagonals instant locking system through stainless steel springs

MAIN COMPONENTS



BASE PACK
Code D800
kg: 40 vol.: 0,07 m³
Packages:2
EAN 8028406003458



EXTENSION PACK 1500h. – 5 rungs
Code D801
kg: 22,7 vol.: 0,30 m³
Packages:2
EAN 8028406003465



PLATFORM SAFETY KIT
Code D803
kg: 7,8 vol.: 0,03 m³
Packages:1
EAN 8028406003755



DOUBLE PLATFORM with toe board
Code D806
Aluminium toe bard
¾ with trapdoor +¼ fix
Max. load 200 kg/m³
kg: 35,5 vol.: 0,15 m³
Packages:2
EAN 8028406090274



DOUBLE PLATFORM
Code D817
Usable just to pass through:
¾ with trapdoor
+ ¼ fix
Max. load 200 kg/m³
kg: 28,4 vol.: 0,13 m³,
Packages:1
EAN 8028406090311



BIG STABILISER
Code D808
4 pcs with 8 clamps
kg: 6,8 (x 4 pcs.)
vol.: 0,016 m³, Packages:2
EAN 8028406003731

MAXI STABILISER
Code D809
4 pcs. with 8 clamps
kg: 12 (x 4 pcs.)
vol.: 0,12 m³, Packages:2
EAN 8028406003748

MAXI STABILISER
Code D802
4 pcs with clamps
kg: 23,4 (x 4 pcs.)
vol.: 0,03 m³, Packages:1
EAN 8028406090281

OTHER COMPONENTS

BASE ELEMENT
Code D804
kg: 15 vol.: 0,02 m³
EAN 8028406003779



BASE ELEMENT with spirit level
Code D805
kg: 15 vol.: 0,02 m³
EAN 8028406003786

FINAL SAFETY HORIZONTAL BRACE
Code D818
kg: 2 vol.: 0,03 m³
EAN 8028406003823

LADDER FRAME 1500 (5 rungs)
Code D807
kg: 7,2 vol.: 0,13 m³
EAN 8028406003861

BASE STRENGTHENING BRACE
Code D811
kg: 2 vol.: 0,01 m³
EAN 8028406003793

BASE HORIZONTAL BRACE
Code D812-B
kg: 2 vol.: 0,01 m³
EAN 8028406104155

EXTENSION PACK HORIZONTAL BRACE
Code D812
kg: 2 vol.: 0,01 m³
EAN 8028406003809

EXTENSION PACK DIAGONAL BRACE 1500 mm
Code D814
kg: 1 vol.: 0,01 m³
EAN 8028406003830

ALUMINIUM LADDER
Code D210/S
kg: 4 vol.: 0,04 m³
EAN 8028406003816



PLATFORM ½ with trapdoor
Code D815
kg: 15 vol.: 0,02 m³
EAN 8028406003847



PLATFORM ½ Without trapdoor
Code D816
kg: 15 vol.: 0,01 m³
EAN 8028406003854



ALUMINIUM TOE BOARD
Code D819
kg: 7,1 vol.: 0,02 m³
EAN 8028406003878



STAIRWELL POSITION DEVICES (without clamps)
Code D660-ZP
kg: 3 vol.: 0,01 m³,
Packages: 1
EAN 8028406003403

GUIDELINES FOR EUROPEAN NORM EN 1004 ACCES TOWERS WITH PLATFORMS AND ACCESSORIES

EN1004 EUROPEAN NORM

1- First platform shall be positioned at max. 4.40 m. from the ground.
The distance between following platforms shall be 4.00 m.
2- Platform safety kit is compulsory both on working platforms and pass-through platforms.
3- Toe board is compulsory just on the working platform.
4- For the assembly and dismantling of the scaffolding, at least **2 people are required**.

Code DG8/1C

3,64 m
2,54 m
Assembling time 6 min.

Code DG8/2C

5,14 m
4,04 m
Assembling time 10 min.

Code DG8/3C

6,64 m
5,54 m
2,54 m
Assembling time 14 min.

Code DG8/4C

8,14 m
7,04 m
3,74 m
Assembling time 18 min.

with levellers and/or stabilisers

Code DG8/5C

9,64 m
8,54 m
6,74 m
3,44 m
Assembling time 24 min.

with levellers and/or stabilisers

Code DG8/6C



11,14 m
10,04 m
6,74 m
3,44 m
Assembling time 28 min.

with stabilisers

Code DG8/7C

12,64 m
11,54 m
7,64 m
4,04 m
Assembling time 33 min.

with stabilisers

TOTAL HEIGHT		m	3,64	5,14	6,64	8,14	9,64	11,14	12,64
WORKING HEIGHT		m	4,40	5,90	7,40	8,90	10,40	11,90	13,40
LAST PLATFORM HEIGHT		m	2,54	4,04	5,54	7,04	8,54	10,04	11,54
81/2008 DECRETO LEGISLATIVO	**Code**	**Description**	Pieces	Pieces	Pieces	Pieces	Pieces	Pieces	Pieces
	D800	Base element	1	1	1	1	1	1	1
	D801	Extension pack 1500	2	3	4	5	6	7	8
	D808	4 big stabilisers with 8 clamps				1	1	1	1
	D802	4 big stabilisers							
	D818	Safety kit	2	2	2	2	2	2	2
		Only structure Code	DG8/1C	DG8/2C	DG8/3C	DG8/4C	DG8/5C	DG8/6C	DG8/7C
		kg	89,4	112,1	134,8	164,3	187	209,7	232,4
		m³	0,73	1,03	1,33	1,64	1,94	2,24	2,54
		Packages	**7**	**9**	**11**	**15**	**17**	**19**	**21**
EN1004 EUROPEAN NORM	D806	Trapdoor platform with toe board	1	1	1	1	1	1	1
	D817	Trapdoor platform without toe board			1	1	2	2	2
	D803	Platform safety kit	1	1	2	2	3	3	3
		Structure including platforms Code	DG8/1C EN	DG8/2C EN	DG8/3C EN	DG8/4C EN	DG8/5C EN	DG8/6C EN	DG8/7C EN
		kg	132,7	105,4	214,3	243,8	302,7	325,4	348,1
		m³	0,91	1,21	1,67	1,98	2,44	2,74	3,04
		Packages	**10**	**10**	**16**	**20**	**24**	**26**	**28**

CAPO-1

- Aluminium professional heavy-duty scaffold tower
- Ø 50 mm tubular welded structure
- Suitable for building works, decorations, plants, both indoor and outdoor.
- Very fast assembling thanks to the automatic aluminium die casting connections between diagonal and horizontal braces.
- Three kinds of base packs:
  Standard / Folding / Adjustable

STANDARD BASE PACK

Code C1-BST

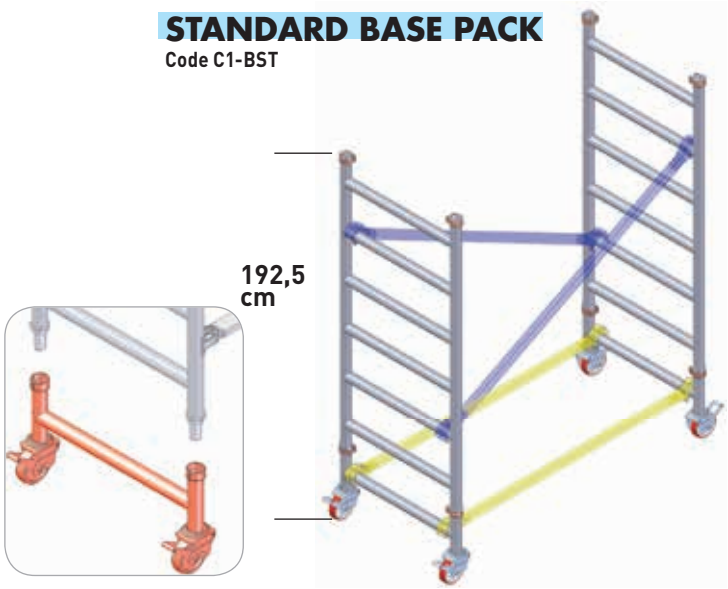

FOLDING BASE PACK

Code C1-BPI

ADJUSTABLE BASE PACK

Code C1-BLI

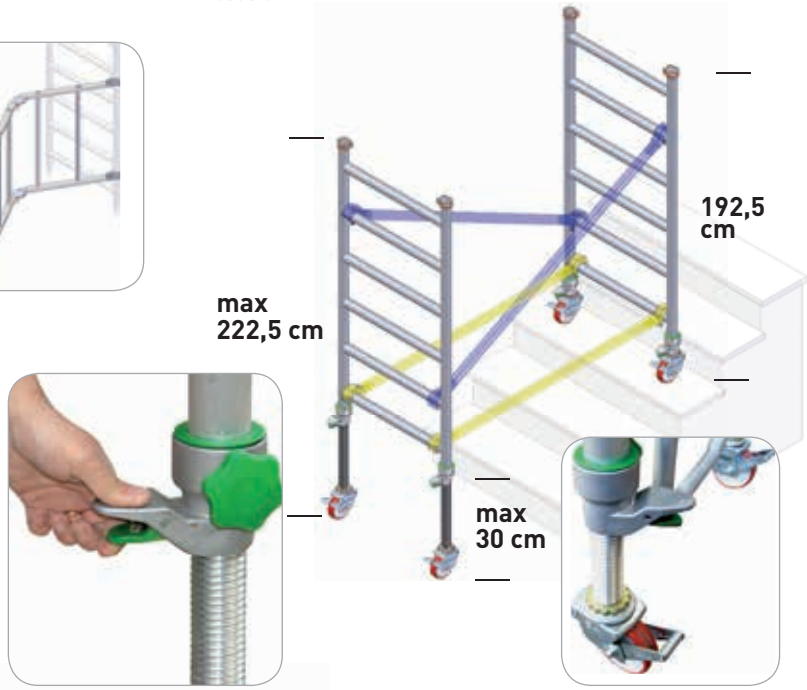

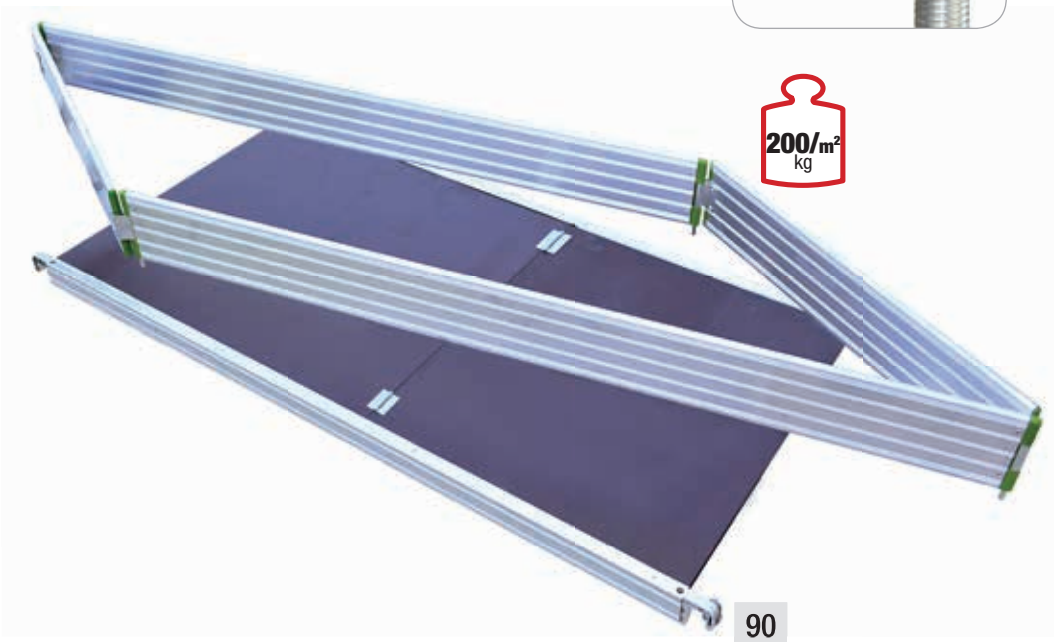

200/m²
kg

Aluminium structure.
Non-slip and waterproof surface.
Melamine Eurodeck wood

Norma gestione ecosostenibile delle foreste FSC

Controlled by FACAL®

It means: **FSC Norm - Environment respect**

SAFETY DEVICES

INTENSIVE USE

10-YEAR WARRANTY

MADE IN ITALY 100%

SUPER PRO 600 RANGE

BASE:
77x161 cm

STRUCTURE:
73x156 cm

PLATFORM:
60x143 cm

CLASS 3
200 kg/m²: EN 1004

200/m² kg — Max. load on one platform

EU
EN1004
EUROPEAN NORM

Maximum working height
9,90 m (outdoor)
12,04 m (indoor)

www.tuv.com TÜVRheinland ID:1000000000 GS geprüfte Sicherheit
S 60080290

POLITECNICO MILANO
2006/4491
2006/4492

Ladder frames connection

Aluminium die casting automatic locking

Stile/rung connection through welding

Stabilisers with articulated steel and rubber feet

Ø 150 mm offset castor with brake

MAIN COMPONENTS

STANDARD BASE PACK

Code C1-BST

2 base elements with castors + 2x6-rung ladder frames + 2 horizontal braces + 2 diagonal braces

kg: 28,50

vol: 0,21 m³, Packages:1

EAN 8028406103509

FOLDING BASE PACK

Code C1-BPI

2 base elements with castors + 2x6-rung ladder frames + 1 base gate + 1 horizontal brace

kg: 30,40

vol: 0,36 m³, Packages: 1

EAN 8028406103516

ADJUSTABLE BASE PACK

Code C1-BLI

2X6-rung adjustable ladder frames + 2 diagonal braces

kg: 38,00

vol: 0,21 m³, Packages: 1

EAN 8028406103523

EXTENSION PACK – h 1040

Code C3-7515

2x4-rung ladder frames + 2 diagonal braces

kg: 12, vol: 0,120 m³, Packages:1

EAN 8028406103240

EXTENSION PACK – h 1560

Code C2-7515

2x6-rung ladder frames + 2 diagonal braces

kg: 15,20, vol: 0,160 m³, Packages:1

EAN 8028406103233

END EXTENSION PACK h. 1040

Code C5-7515

2x4-rung ladder frames + 4 horizontal braces

kg: 15,60, vol: 0,125 m³, Packages:1

EAN 8028406103264

END EXTENSION PACK h 1560

Code C4-7515

2x6-rung ladder frames + 4 horizontal braces

kg: 18,80, vol: 0,165 m³, Packages:1

EAN 8028406103257



PLATFORM With toe board

Code C7-7515

Aluminium structure- with trapdoor

kg: 20,80, vol: 0,103 m³, Packages:2

EAN 8028406103288



PLATFORM Without toe board

Code C6-7515

Aluminium structure- with trapdoor

kg: 14,60, vol: 0,092 m³, Packages:1

EAN 8028406103271

HORIZONTAL SAFETY PACK for platform

Code C134-7515

4 pieces

kg: 8,00, vol: 0,10 m³, Packages:1

EAN 8028406104179

STABILISERS 2100 mm

Code C84-7515

4 pieces

kg: 24,00, vol: 0,18 m³, Packages:1

EAN 8028406104186

OTHER COMPONENTS

BASE ELEMENT With 2 braking castors

Code C19-7515

kg: 6,00, vol: 0,010 m³, Packages: 1

EAN 8028406103219

BASE GATE – 2 doors

Code C18-7515

kg: 6,20, vol: 0,030 m³, Packages:1

EAN 8028406103202

LADDER FRAME h 1040- 4

Code C11-7515

kg: 4,00, vol: 0,040 m³, Packages:1

EAN 8028406103158

LADDER FRAME h 1560- 6

Code C12-7515

kg: 5,60, vol: 0,060 m³, Packages:1

EAN 8028406103165

● green

HORIZONTAL BRACE 1600 mm

Code C13-7515

kg: 1,90, vol: 0,025 m³, Packages:1

EAN 8028406103172

● red

DIAGONAL BRACE 1800 mm

Code C14-7515

kg: 2,00, vol: 0,027 m³, Packages:1

EAN 8028406103189



FOLDING ALUMINIUM TOE BOARD

Code C15-7515

kg: 6,20, vol: 0,011 m³, Packages:1

EAN 8028406103196

STABILISER 2100 mm

Code C8-7515

kg: 6,00, vol: 0,045 m³, Packages:1

EAN 8028406103141

ADJUSTABLE BASE LADDER FRAME

Code C26-7515

kg: 14,00, vol: 0,065 m³, Packages:1

EAN 8028406103226

MAIN COMPOSITIONS – INCLUDING PLATFORMS

Code C30-1/C

1,94 m
0,78 m
Assembling time 4 min.

Code C31-1/C

2,98 m
1,82 m
Assembling time 6 min.

Code C32-1/C

3,50 m
2,35 m
Assembling time 8 min.

Code C33-1/C

4,54 m
3,38 m
Assembling time 10 min.

Code C34-1/C

5,05 m
3,90 m
Assembling time 14 min.

Code C35-1/C



6,10 m
4,95 m
1,94 m
Assembling time 16 min.

Code C36-1/C



6,62 m
5,47 m
1,94 m
Assembling time 18 min.

Code C37-1/C



7,66 m
6,50 m
3,00 m
Assembling time 21 min.

Code C38-1/C



8,18 m
7,02 m
3,53 m
Assembling time 23 min.

Code C39-1/C



9,22 m
8,06 m
4,32 m
Assembling time 26 min.

Code C40-1/C



9,74 m
8,58 m
5,12 m
1,94 m
Assembling time 28 min.

Code C41-1/C



10,78 m
9,63 m
5,12 m
1,94 m
Assembling time 31 min.

Code C42-1/C



11,30 m
10,14 m
6,44 m
2,74 m
Assembling time 35 min.

TOTAL HEIGHT	m	1,94	2,98	3,50	4,54	5,05	6,10	6,62	7,66	8,18	9,22	9,74	10,78	11,30
WORKING HEIGHT	m	2,68	3,72	4,25	5,28	5,80	6,85	7,37	8,40	8,92	9,96	10,48	11,53	12,04
LAST PLATFORM HEIGHT	m	0,78	1,82	2,35	3,38	3,90	4,95	5,47	6,50	7,02	8,06	8,58	9,63	10,14
EN1004 EUROPEAN NORM	Code	Description	Pieces	Pieces	Pieces	Pieces	Pieces	Pieces	Pieces	Pieces	Pieces	Pieces	Pieces	Pieces	Pieces
	C3-7515	Extension pack – 4 rungs													
	C2-7515	Extension pack – 6 rungs				1	1	2	2	3	3	4	4	5	5
	C5-7515	End extension pack- 4 rungs		1		1		1		1		1		1	
	C4-7515	End extension pack- 4 rungs			1		1		1		1		1		1
	C6-7515	Platform without toe board	1	1				1	1	1	1	1	2	2	2
	C7-7515	Platform with toe board			1	1	1	1	1	1	1	1	1	1	1
	C84-7515	4 stabilisers					1	1	1	1	1	1	1	1	1
	C134-7515	4 horizontal safety braces						1	1	1	1	1	2	2	2
Standard base pack	C1-BST	Standard base pack	1	1	1	1	1	1	1	1	1	1	1	1	1
		code	C30-1/C-BST	C3 1-1/C-BST	C32-1/C-BST	C33-1/C-BST	C34-1/C-BST	C35-1/C-BST	C36-1/C-BST	C37-1/C-BST	C38-1/C-BST	C39-1/C-BST	C40-1/C-BST	C41-1/C-BST	C42-1/C-BST
		kg	43	58,7	68	80	103	141	144	156	159	171	196,5	208	213
		m³	0,30	0,43	0,48	0,60	1,44	1,75	1,80	1,91	1,96	2,06	2,31	2,47	2,51
Folding base pack	C1-BPI	Folding base pack	1	1	1	1	1	1	1	1	1	1	1	1	1
		code	C30-1/C-BPI	C31-1/C-BPI	C32-1/C-BPI	C33-1/C-BPI	C34-1/C-BPI	C35-1/C-BPI	C36-1/C-BPI	C37-1/C-BPI	C38-1/C-BPI	C39-1/C-BPI	C40-1/C-BPI	C41-1/C-BPI	C42-1/C-BPI
		kg	45	60,6	70	82	109,2	143,4	146,6	158,6	172	182	199	211	215
		m³	0,45	0,58	0,63	0,75	1,59	1,91	1,94	2,06	2,10	2,07	2,45	2,57	2,61
Adjustable base pack	C1-BLI	Adjustable base pack	1	1	1	1	1	1	1	1	1	1	1	1	1
		code	C30-1/C-BLI	C31-1/C-BLI	C32-1/C-BLI	C33-1/C-BLI	C34-1/C-BLI	C35-1/C-BLI	C36-1/C-BLI	C37-1/C-BLI	C38-1/C-BLI	C39-1/C-BLI	C40-1/C-BLI	C41-1/C-BLI	C42-1/C-BLI
		kg	46,6	62,2	77,5	89,5	112,5	150	153	165	168	180	205	217	222
		m³	0,30	0,55	0,48	0,60	1,44	1,75	1,80	1,91	1,96	2,06	2,21	2,47	2,51
		Composition packages	2	3	4	5	6	9	9	10	10	11	13	14	14

CAPO-2

- Aluminium professional heavy-duty scaffold tower.
- Ø 50 mm tubular welded structure
- Medium-big sized, it is suitable for building works, decorations, plants, both indoor and outdoor.
- Very fast assembling thanks to the automatic aluminium die casting connections between diagonal and vertical braces.
- Two kinds of base packs: Standard / Adjustable

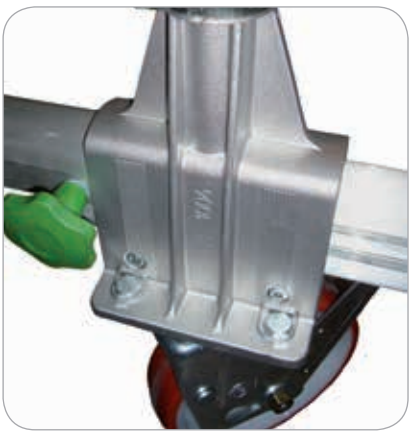

STANDARD BASE PACK

Without levellers
Code C2-BFI

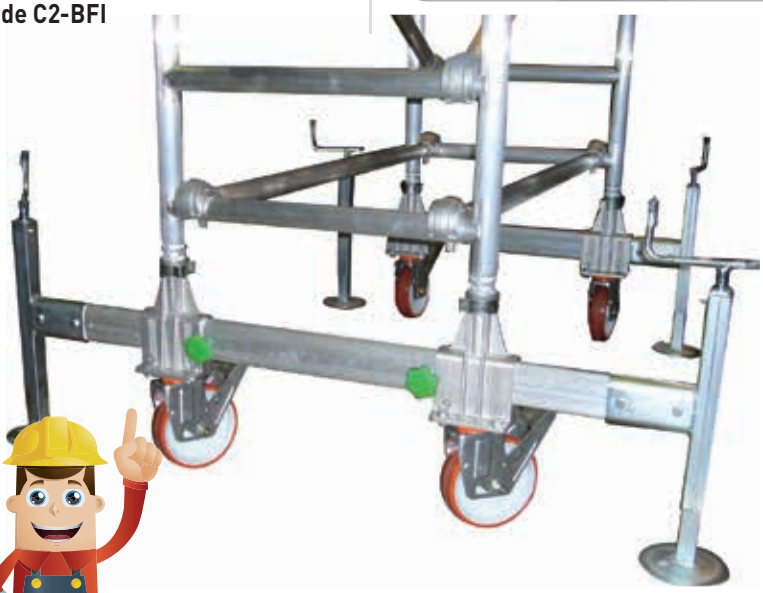

Levellers as accessories

SAFE AND PRACTICAL!!
Base element with castors. It's made from aluminium with a steel strengthening inside.

ADJUSTABLE BASE PACK

Code C2-BLI

SAFETY DEVICES

Adjustable leg with double regulation

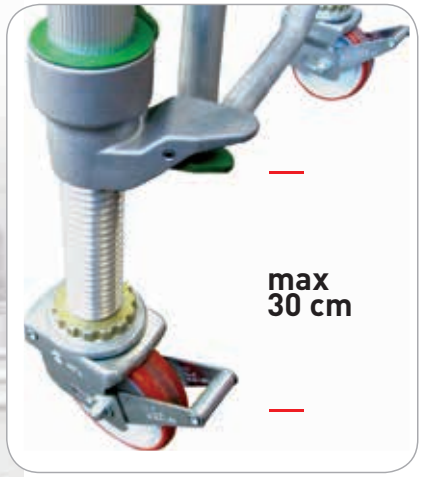

INTENSIVE USE

10-YEAR WARRANTY

MADE IN ITALY 100%

SUPER PRO 600 RANGE

BASE:
112x230 cm

STRUCTURE:
111x227 cm

PLATFORM:
97x210 cm

CLASS 3
200 kg/m²: EN 1004

200/m² kg — Max. load on one platform

EU EN1004 EUROPEAN NORM

Maximum working height
9,90 m (outdoor)
11,46 m (indoor)

www.tuv.com TÜVRheinland ID:1000000000 — GS geprüfte Sicherheit

S 60080285

POLITECNICO MILANO — 2009/994

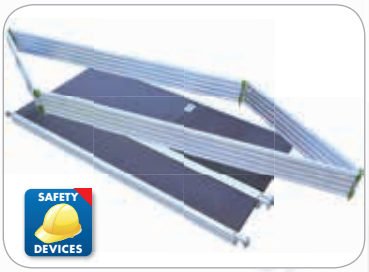

Aluminium structure.
Non-slip and waterproof surface.
Melamine Eurodeck wood

Norma gestione ecosostenibile delle foreste FSC — Controlled by FACAL

It means: **FSC Norm - Environment respect**

EXCLUSIVE: aluminium folding toe board.

Aluminium die casting automatic locking

Ladder frames connection

Stile/rung connection through welding

Stabilisers with articulated steel and rubber feet

Ø 200 mm offset castor with brake

MAIN COMPONENTS

STANDARD BASE PACK
Without Levellers
Code C2-BFI
2 base elements + 2x6-rung ladder frames + 2 horizontal braces + 2 diagonal braces
kg: 44, vol.: 0,35 m³,
Packages:3
EAN 8028406104940

ADJUSTABLE BASE PACK
Code C2-BLI
2x6-rung adjustable ladder frames + 2 diagonal braces
kg: 45, vol.: 0,38 m³,
Packages: 2
EAN 8028406104346



EXTENSION PACK h 1040
Code C3-1122
2x4-rung ladder frames + 2 diagonal braces
kg: 14,80, vol.: 0,15 m³,
Packages:2
EAN 8028406104223

EXTENSION PACK h 1560
Code C2-1122
2x6-rung ladder frames + 2 diagonal braces
kg: 19,20, vol.: 0,22 m³,
Packages:2
EAN 8028406104230

END EXTENSION PACK h 1040
Code C5-1122
2x4-rung ladder frames + 4 horizontal braces
kg: 14,60, vol.: 0,16 m³,
Packages:2
EAN 8028406104247

END EXTENSION PACK h. 1560 – 6 rungs
Code C4-1122
2x6-rung ladder frames + 4 horizontal braces
kg: 19,00, vol.: 0,23 m³,
Packages:2
EAN 8028406104254



PLATFORM With toe board
Code C7-1122
Aluminium structure-with trapdoor
kg: 43,00,
vol.: 0,30 m³,
Packages:2
EAN 8028406104261



PLATFORM Without toe board
Code C6-1122
Aluminium structure-with trapdoor
kg: 33,00,
vol.: 0,20 m³,
Packages:1
EAN 8028406104377

HORIZONTAL SAFETY PACK for platform
Code C134-1122
4 pieces
kg: 9,20,
vol.: 0,10 m³,
Packages:1
EAN 8028406104278

STABILISERS – 2100 mm
Code C84-7515
4 pieces
kg: 24,00, vol.: 0,18 m³,
Packages:1
EAN 8028406103141

OTHER COMPONENTS

BASE ELEMENT With 2 castors – for standard base
Code C19-1122
kg: 15,00, vol.: 0,02 m³,
Packages: 1
EAN 8028406104957

LADDER FRAME h 1040 - 4 rungs
Code C11-1122
kg: 5,00, vol.: 0,07 m³,
Packages:1
EAN 8028406104285

LADDER FRAME h 1560 - 6 rungs
Code C12-1122
kg: 7,20, vol.: 0,10 m³,
Packages:1
EAN 8028406104292

LEVELLERS 4 pieces pack
Code D802
kg: 22,7, vol.: 0,03 m³,
Packages:1
EAN 8028406090281

green

HORIZONTAL BRACE 2210 mm
Code C13-1122
kg: 2,30, vol.: 0,025 m³,
Packages:1
EAN 8028406104308

red

DIAGONAL BRACE 2343 mm
Code C14-1122
kg: 2,40, vol.: 0,027 m³,
Packages:1
EAN 8028406104315

FOLDING ALUMINIUM TOE BOARD
Code C15-1122
kg: 10, vol.: 0,019 m³,
Packages:1
EAN 8028406104322

STABILISER 2100 mm
Code C8-7515
kg: 6,00, vol.: 0,045 m³,
Packages:1
EAN 8028406103141

PLATFORM Made of aluminium - ¼ without trapdoor
Code C16-1122
kg:14, vol.: 0,8 m³,
Packages:1
EAN 8028406104353

PLATFORM Made of aluminium – ¾ with trapdoor
Code C17-1122
kg: 19,40, vol.: 0,123 m³,
Packages: 1
EAN 8028406104360

ADJUSTABLE BASE LADDER FRAME
Code C26-1122
kg: 17,80, vol.: 0,175 m³,
Packages:1
EAN 8028406104339

MAIN COMPOSITIONS – INCLUDING PLATFORMS

Code C30-2/C

1,87 m
0,98 m

Assembling time 4 min.

Code C31-2/C

2,91 m
1,76 m

Assembling time 6 min.

Code C32-2/C

3,43 m
2,28

Assembling time 8 min.

Code C33-2/C

4,47 m
3,32

Assembling time 10 min.

Code C34-2/C

4,99 m
3,58 m

Assembling time 14 min.

Code C35-2/C



6,03 m
4,88 m
1,94 m

Assembling time 16 min.

Code C36-2/C

6,55 m
5,40
1,94

Assembling time 18 min.

Code C37-2/C



7,59 m
6,44
3,00

Assembling time 21 min.

Code C38-2/C

8,11 m
6,96 m
3,53 m

Assembling time 23 min.

Code C39-2/C



9,15 m
8,00 m
4,32 m

Assembling time 26 min.

Code C40-2/C



9,67 m
8,52 m
5,12 m
1,94 m

Assembling time 28 min.

Code C41-2/C



10,71 m
9,56 m
5,91 m
1,94 m

Assembling time 31 min.

TOTAL HEIGHT		m	1,87	2,91	3,43	4,47	4,99	6,03	6,55	7,59	8,11	9,15	9,67	10,71
WORKING HEIGHT		m	2,88	3,66	4,18	5,22	5,48	6,78	7,30	8,34	8,86	9,90	10,42	11,46
LAST PLATFORM HEIGHT		m	0,98	1,76	2,28	3,32	3,58	4,88	5,40	6,44	6,96	8,00	8,52	9,56
EN1004 EUROPEAN NORM	Code	Description	Pieces	Pieces	Pieces	Pieces	Pieces	Pieces	Pieces	Pieces	Pieces	Pieces	Pieces	Pieces
	C3-1122	Extension pack – 4 rungs												
	C2-1122	Extension pack – 6 rungs				1	1	2	2	3	3	4	4	5
	C5-1122	End extension pack- 4 rungs		1		1		1		1		1		1
	C4-1122	End extension pack- 4 rungs			1		1		1		1		1	
	C6-1122	Platform without toe board	1	1				1	1	1	1	1	2	2
	C7-1122	Platform with toe board			1	1	1	1	1	1	1	1	1	1
	C134-1122	4 horizontal safety braces						1	1	1	1	1	2	2
Standard base pack	C2-BFI	Standard base pack	1	1	1	1	1	1	1	1	1	1	1	1
	D-802	4 levellers					1	1	1	1				
	C84-7515	4 stabilisers									1	1	1	1
		code	C30-2/C-BFI	C31-2/C-BFI	C32-2/C-BFI	C33-2/C-BFI	C34-2/C-BFI	C35-2/C-BFI	C36-2/C-BFI	C37-2/C-BFI	C38-2/C-BFI	C39-2/C-BFI	C40-2/C-BFI	C41-2/C-BFI
		kg	77	91,5	106	120	149	206	210	225	229	244	290	306
		m³	0,58	0,74	0,91	1,06	1,93	2,38	2,45	2,60	2,67	2,82	3,20	3,25
		Composition packages	4	6	7	9	10	14	14	16	16	18	20	22
Adjustable base pack	C2-BLI	Adjustable base pack	1	1	1	1	1	1	1	1	1	1	1	1
	C84-7515	4 stabilisers					1	1	1	1	1	1	1	1
		codice	C30-2/C-BLI	C31-2/C-BLI	C32-2/C-BLI	C33-2/C-BLI	C34-2/C-BLI	C35-2/C-BLI	C36-2/C-BLI	C37-2/C-BLI	C38-2/C-BLI	C39-2/C-BLI	C40-2/C-BLI	C41-2/C-BLI
		kg	78	92,6	107	121,8	150,2	207,2	211,6	226,4	230,8	245,6	292,2	307
		m³	0,58	0,74	0,91	1,06	1,93	2,38	2,45	2,60	2,67	2,82	3,20	3,35
		Composition packages	3	5	6	8	9	13	13	15	15	17	19	21

CAPO-3

- Aluminium professional heavy-duty scaffold tower.
- Ø 50 mm tubular welded structure
- Big sized, it is suitable for building works, decorations, plants, both indoor and outdoor.
- Very fast assembling thanks to the automatic aluminium die casting connections between diagonal and horizontal braces.
- Two kinds of base packs: Standard / Adjustable

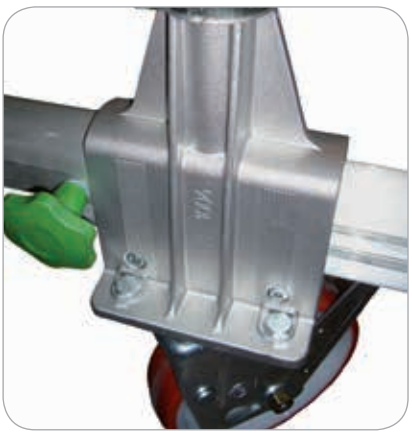

STANDARD BASE PACK

Without levellers

Code C3-BFI

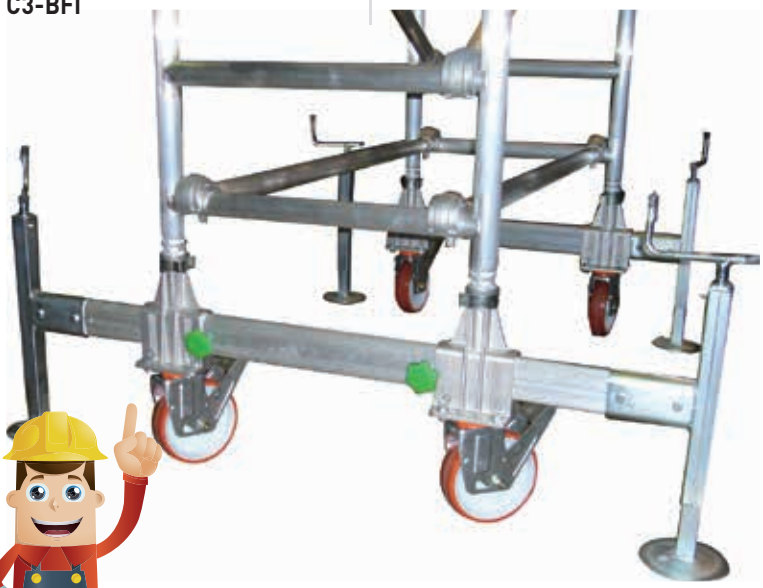

Levellers as accessories

SAFE AND PRACTICAL!
Base element with castors. It's made from aluminium with a steel strengthening inside.

ADJUSTABLE BASE PACK

Code C3-BLI

Adjustable leg with double regulation

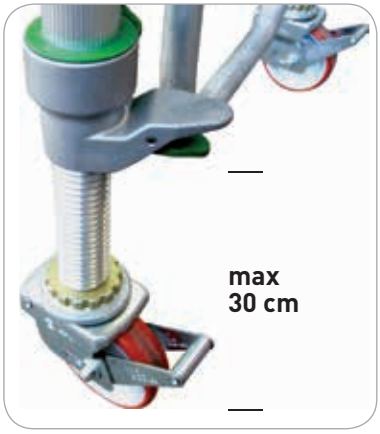

INTENSIVE USE

10-YEAR WARRANTY

MADE IN ITALY 100%

SUPER PRO 600 RANGE

BASE:
140,3x293 cm

STRUCTURE:
135x267,6 cm

PLATFORM:
120x261 cm

Max 10,71m

CLASS 3
200 kg/m²: EN 1004

200/m² kg — Max. load on one platform

EU EN1004 EUROPEAN NORM

Maximum working height
9,90 m (outdoor)
11,46 m (indoor)

www.tuv.com TÜVRheinland ID:1000000000 GS geprüfte Sicherheit

S 60080285

POLITECNICO MILANO

2009/993

EXCLUSIVE: aluminium folding toe board.
Aluminium structure.
Non-slip and waterproof surface.
Melamine Eurodeck wood

Norma gestione ecosostenibile delle foreste FSC — Controlled by FACAL®

It means: **FSC Norm - Environment respect**

Aluminium die casting automatic locking

Ladder frames connection

Stile/rung connection through welding

Stabilisers with articulated steel and rubber feet

Ø 200 mm offset castor with brake

MAIN COMPONENTS

STANDARD BASE PACK
(Without Levellers)
Code C3-BFI
2 base elements + 2x6-rung ladder frames + 2 horizontal braces + 2 diagonal braces
kg: 58,60
vol.: 0,37 m³, Packages:3
EAN 8028406105015

ADJUSTABLE BASE PACK
Code C3-BLI
2x6-rung adjustable ladder frames + 2 diagonal braces
kg: 48,00
vol.: 0,50 m³, Packages: 2
EAN 8028406104506

EXTENSION PACK – h 1040
Code C3-1326
2x4-rung ladder frames + 2 diagonal braces
kg: 16,60 vol.: 0,22 m³, Packages:2
EAN 8028406104384

EXTENSION PACK – h 1560
Code C2-1326
2x6-rung ladder frames + 2 diagonal braces
kg: 21,40 vol.: 0,28 m³, Packages:2
EAN 8028406104391

END EXTENSION PACK h. 1040
Code C5-1326
2x4-rung ladder frames + 4 horizontal braces
kg: 21,60 vol.: 0,27 m³, Packages:2
EAN 8028406104407

END EXTENSION PACK h. 1560
Code C4-1326
2x6-rung ladder frames+ 4 horizontal braces
kg: 26,40 vol.: 0,33 m³, Packages:2
EAN 8028406104414



PLATFORM With toe board
Code C7-1326
Aluminium structure- with trapdoor
kg: 57,60 vol.: 0,35 m³, Packages:2
EAN 8028406104421



PLATFORM Without toe board
Code C6-1326
Aluminium structure- with trapdoor
kg: 45,60 vol.: 0,32 m³, Packages:1
EAN 8028406104537

HORIZONTAL SAFETY PACK for platform
Code C134-1326
4 pieces
kg: 10,40 vol.: 0,12 m³, Packages:1
EAN 8028406104438

STABILISERS 2100 mm
Code C84-7515
4 pieces
kg: 24,00
vol.: 0,18 m³, Packages:1
EAN 8028406103141

OTHER COMPONENTS

BASE ELEMENT With 2 castors for standard base
Code C19-1326
kg: 16,00, vol.: 0,02 m³, Packages: 1
EAN 8028406105022

LADDER FRAME h 1040- 4 rungs
Code C11-1326
kg: 5,60, vol.: 0,08 m³, Packages:1
EAN 8028406104353

LADDER FRAME h 1560- 6 rungs
Code C12-1326
kg: 8,00, vol.: 0,11 m³, Packages:1
EAN 8028406104452

LEVELLERS 4 pieces pack
Code D802
kg: 22,7, vol.: 0,03 m³, Packages:1
EAN 8028406090281

green

HORIZONTAL BRACE 2615 mm
Code C13-1326
kg: 2,60, vol.: 0,028 m³, Packages:1
EAN 8028406104469

red

DIAGONAL BRACE 2729 mm
Code C14-1326
kg: 2,70, vol.: 0,030 m³, Packages:1
EAN 8028406104476

FOLDING ALUMINIUM TOE BOARD
Code C15-1326
kg: 12, vol.: 0,030 m³, Packages:1
EAN 8028406104483

STABILISER 2100 mm
Code C8-7515
kg: 6,00, vol.: 0,045 m³, Packages:1
EAN 8028406103141

PLATFORM
Made of aluminium - 1/2 without trapdoor
Code C16-1326
kg: 22,80, vol.: 0,16 m³, Packages:1
EAN 8028406104513



PLATFORM
Made of aluminium – 1/2 with trapdoor
Code C17-1326
kg: 22,80, vol.: 0,16 m³, Packages: 1
EAN 8028406104520

ADJUSTABLE BASE LADDER FRAME
Code C26-1326
kg: 18,60, vol.: 0,19 m³, Packages:1
EAN 8028406104490

MAIN COMPOSITIONS –INCLUDING PLATFORMS

Code C30-3/C

1,87 m
0,98 m
Assembling time 4 min.

Code C31-3/C

2,91 m
1,76 m
Assembling time 6 min.

Code C32-3/C

3,43 m
2,28
Assembling time 8 min.

Code C33-3/C

4,47 m
3,32
Assembling time 10 min.

Code C34-3/C

4,99 m
3,58 m
Assembling time 14 min.

Code C35-3/C



6,03 m
4,88 m
1,94 m
Assembling time 16 min.

Code C36-3/C

6,55 m
5,40
1,94
Assembling time 18 min.

Code C37-3/C



7,59 m
6,44
3,00
Assembling time 21 min.

Code C38-3/C

8,11 m
6,96 m
3,53 m
Assembling time 23 min.

Code C39-3/C



9,15 m
8,00 m
4,32 m
Assembling time 26 min.

Code C40-3/C



9,67 m
8,52 m
5,12 m
1,94 m
Assembling time 28 min.

Code C41-3/C



10,71 m
9,56 m
5,91 m
1,94 m
Assembling time 31 min.

TOTAL HEIGHT		m	1,87	2,91	3,43	4,47	4,99	6,03	6,55	7,59	8,11	9,15	9,67	10,71
WORKING HEIGHT		m	2,88	3,66	4,18	5,22	5,48	6,78	7,30	8,34	8,86	9,90	10,42	11,46
LAST PLATFORM HEIGHT		m	0,98	1,76	2,28	3,32	3,58	4,88	5,40	6,44	6,96	8,00	8,52	9,56
EN1004 EUROPEAN NORM	Code	Description	Pieces	Pieces	Pieces	Pieces	Pieces	Pieces	Pieces	Pieces	Pieces	Pieces	Pieces	Pieces
	C3-1326	Extension pack – 4 rungs												
	C2-1326	Extension pack – 6 rungs				1	1	2	2	3	3	4	4	5
	C5-1326	End extension pack- 4 rungs		1		1		1		1		1		1
	C4-1326	End extension pack- 6 rungs			1		1		1		1		1	
	C6-1326	Platform without toe board	1	1				1	1	1	1	1	2	2
	C7-1326	Platform with toe board			1	1	1	1	1	1	1	1	1	1
	C134-1326	4 horizontal safety braces						1	1	1	1	1	2	2
Standard base pack	C3-BFI	Standard base pack	1	1	1	1	1	1	1	1	1	1	1	1
	D-802	4 levellers					1	1	1	1				
	C84-7515	4 stabilisers									1	1	1	1
		Code	C30-3/C-BFI	C31-3/C-BFI	C32-3/C-BFI	C33-3/C-BFI	C34-3/C-BFI	C35-3/C-BFI	C36-3/C-BFI	C37-3/C-BFI	C38-3/C-BFI	C39-3/C-BFI	C40-3/C-BFI	C41-3/C-BFI
		kg	103,6	125,6	141,6	159	187,8	260	265	278	187	303	364	470
		m³	0,69	0,96	1,05	1,27	2,13	2,79	2,85	3,07	3,13	3,35	3,85	4,07
		Composition packages	4	6	7	9	10	14	14	16	16	18	20	22
Adjustable base pack	C3-BLI	Adjustable base pack	1	1	1	1	1	1	1	1	1	1	1	1
	C84-7515	4 stabilisers					1	1	1	1	1	1	1	1
		Code	C30-3/C-BLI	C31-3/C-BLI	C32-3/C-BLI	C33-3/C-BLI	C34-3/C-BLI	C35-3/C-BLI	C36-3/C-BLI	C37-3/C-BLI	C38-3/C-BLI	C39-3/C-BLI	C40-3/C-BLI	C41-3/C-BLI
		kg	93	115	131,8	148,4	177,2	249,8	254,6	271,2	276,6	292,6	353,4	370
		m³	0,82	1,09	1,18	1,40	2,26	2,92	2,98	3,20	3,26	3,48	3,98	4,20
		Composition packages	3	5	6	8	9	13	13	15	15	17	19	21

INTENSIVE USE

10-YEAR WARRANTY

MADE IN ITALY 100%

"PIEGO"

2 PLATFORMS:
35x153 cm

150 kg MAX

- Aluminium folding professional scaffolding.
- Fast to assemble.
- Provided with horizontal and diagonal braces bag.
- Stiles size: 25x65 mm.
- Rungs size: 30x30 mm.
- 4 Ø 125 mm castors with brake.
- 2 half platforms.

SAFETY:
Diagonals instant locking system through stainless steel springs

S 60080180
2PfG 1273/11.10

Lockable gate junction

Nylon clutch for hinge rotation

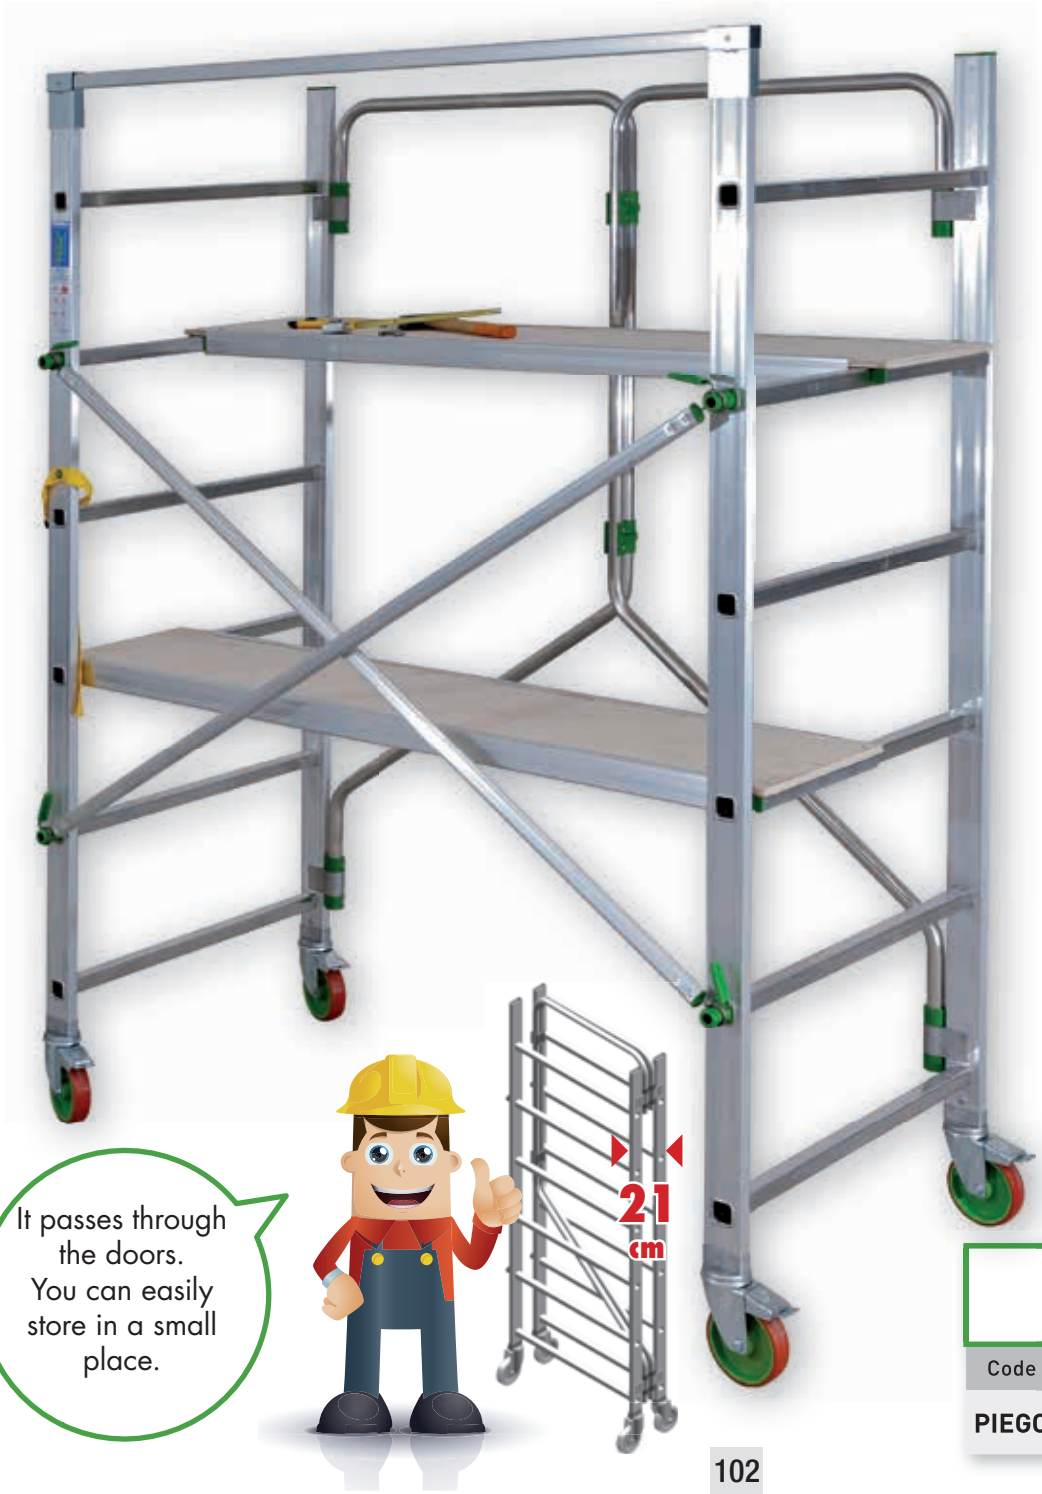

It passes through the doors.
You can easily store in a small place.

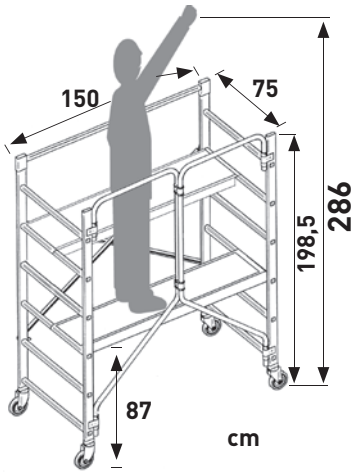

Code	(kg)	(m^3)	Pieces	Ean
PIEGO	31,5	0,32	1	8028406035015

Notes

aluMito

- Aluminium medium-sized scaffold tower.
- Suitable for indoor industrial works and wherever you need to reach medium working heights.
- Galvanized steel base
- Stiles size: 25x65 mm
- Square rungs: 30x30 mm
- 4 ∅ 125 mm castors with brakes
- Working platform with trapdoor made of wood and aluminium

Norma gestione ecosostenibile delle foreste FSC

Controlled by FACAL ®

It means: **FSC Norm - Environment respect**

FROM STANDARD TO MAXI COMPOSITION

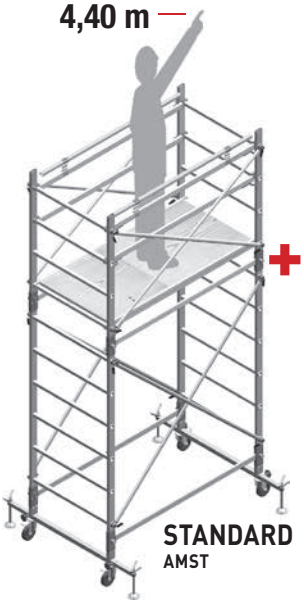

STANDARD
AMST

+

1800 EXTENSION PACK
AMMK

=

MAXI
AMMX

ACCESSORIES

Stabilisers
Code D661
4 pieces with 8 clamps
kg: 6,8 (4 pcs.) vol.: 0,016 m³,
Packages: 2
EAN 8028406090090

Levellers
Code AMLV-4
Packages: 1 (4 pcs)
kg: 11,2 vol.: 0,0045 m³
EAN 8028406105619



Working platform with trapdoor
Code AMPB
Wood/aluminium
kg: 11 vol.: 0,08 m³
EAN 8028406090120

1800 Extension pack (6 rungs)
Code AMMP
kg: 17,40 vol.: 0,02 m³,
Packages:2
EAN 8028406004127

Toe board
Code AMFP
for working platform
kg: 8 vol.: 0,02 m³, Packages:1
EAN 8028406090090



Stairwell position devices
Code AMZP
including clamps
kg: 3 vol.: 0,01 m³, Packages: 2
EAN 8028406103540

Guardrail
Code AMRP
complying the norm 2 PfG 1273/11.10
kg: 7 vol.: 0,02 m³, Packages:1
EAN 8028406004066

Code	(cm)	(cm)	(cm)	(cm)	(cm)	(kg)	(m³)	pieces	Ean
AMST	340	440	240	160	75	77	0,40	7	8028406090298
AMMX	540	630	420	160	75	94,4	0,51	10	8028406090304
AMMK	180	-	-	160	75	17,4	0,22	3	8028406104216

5-YEAR WARRANTY

MADE IN ITALY 100%

PRO 300 RANGE

BASE:
86x160 cm

STRUCTURE:
75x150 cm

PLATFORM:
68x150 cm

CLASS 3

200 kg/m²: EN 1004

150 kg MAX

Standard
Maximum working height 4,40 m

S 60080174
2 PfG 1273/11.10 NORM

Maxi
Maximum working height 6,30 m

EN1004
EUROPEAN NORM

With big stabilisers

2006/4050

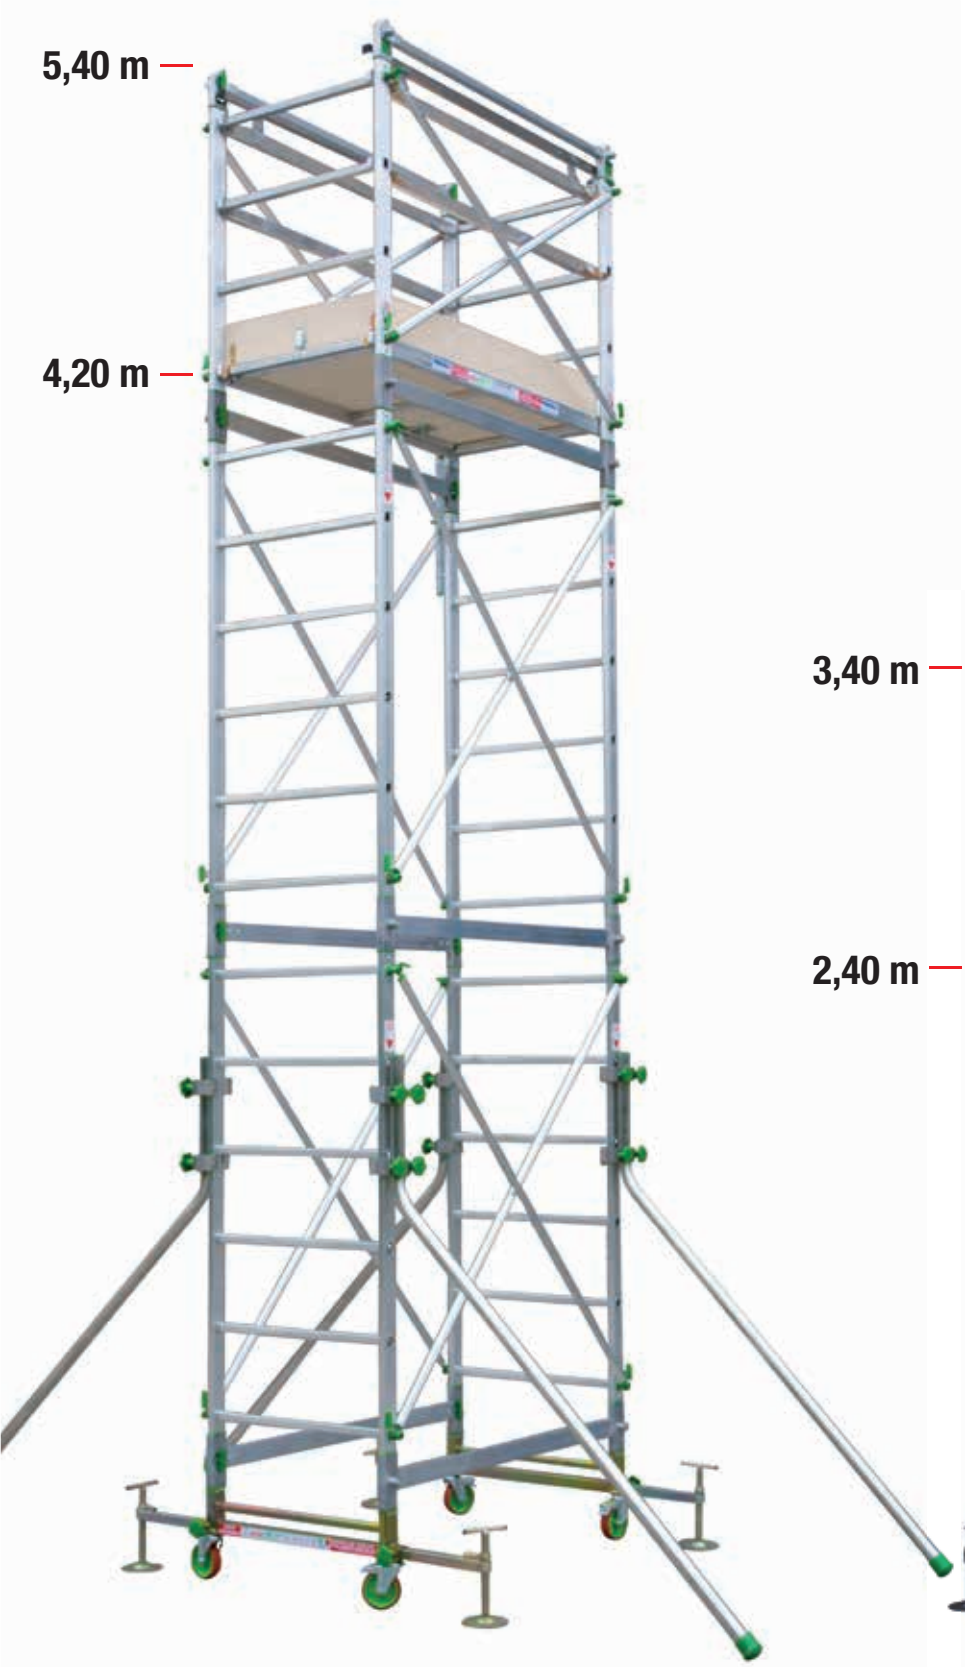

MAXI

STANDARD

5-YEAR WARRANTY

MADE IN ITALY 100%

PRO 300 RANGE

Tano

PLATFORM:
45x140 cm

100 kg MAX

- Small aluminium scaffolding.
- Suitable for indoor and domestic use.
- Stiles size: 25x65 mm.
- Rungs size: 30x30 mm.
- Solid pine wood platform.
- Very light, and it can be fully dismantled.

Useful and solid wood pin tool tray

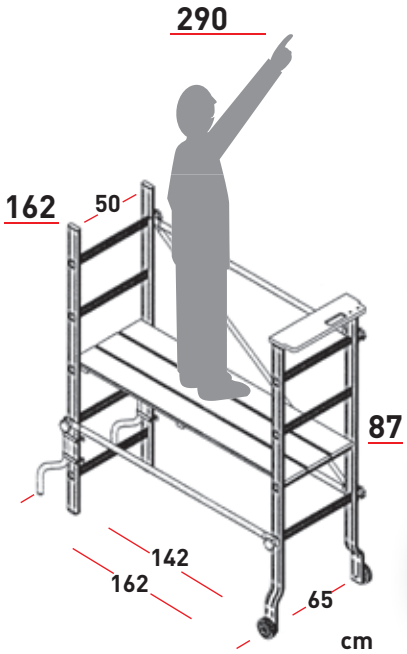

Code	(kg)	(m³)	Pieces	Ean
TANO	15	0,15	1	8028406000181

Assembling time

6 min.

Anti-overturning bright green stabiliser

5-YEAR WARRANTY

MADE IN ITALY 100%

PRO 300 RANGE

"ESTRO"

PLATFORM:
52x152 cm

- Aluminium half-professional scaffolding.
- Fast and easy to assemble and dismantle.
- Aluminium structure platform. Wood surface.

150 kg MAX

S 60080180
2PfG 1273/11.10

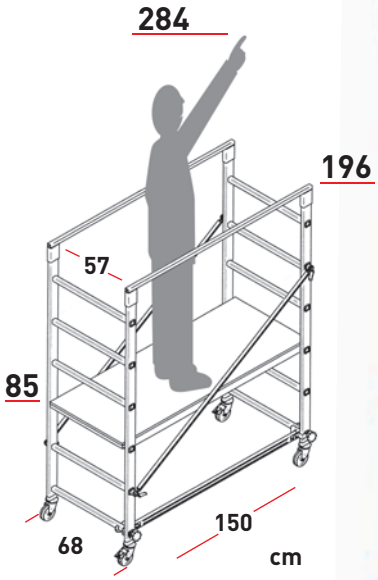

Rapid connections between ladder frames and horizontal braces



ACCESSORY:
Stairwell position devices

68 cm wide
IT PASSES THROUGH THE DOORS!

Assembling time
6 min.

Code	(kg)	(m³)	Pieces	Ean
ESTRO	27	0,20	1	8028406090137
AMZP	Pair of stairwell position devices			

BASE: 114x156 cm
STRUCTURE: 58x156 cm
PLATFORM: 51x143 cm

- Aluminium multifunction scaffolding
- Easy to fold thanks to the aluminium die casting hinges.
- Immediate connection between diagonals and horizontals through the expansion fastening system, actioned by long levers.
- Stiles size: 24x60 mm
- Rungs 30x30 mm

Aluminium structure.
Non-slip and waterproof surface.
Melamine Eurodeck wood

Strong aluminium hooks, welded to the platform.

Aluminium die casting automatic hinge with internal steel plate strengthening (Registered Pattent)

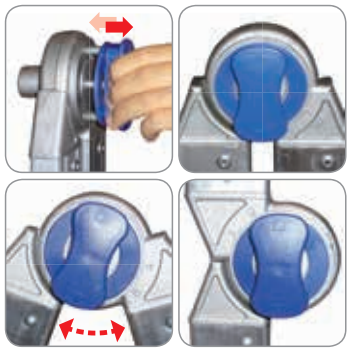

Norma gestione ecosostenibile delle foreste FSC

Controlled by FACAL®

It means: **FSC Norm - Environment respect**

2 Double ladders

2 Leaning ladders

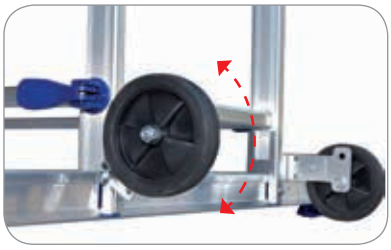

Castor lifting system.
It prevents that the two ladders slip when they are in A-frame step position or used as leaning ladders

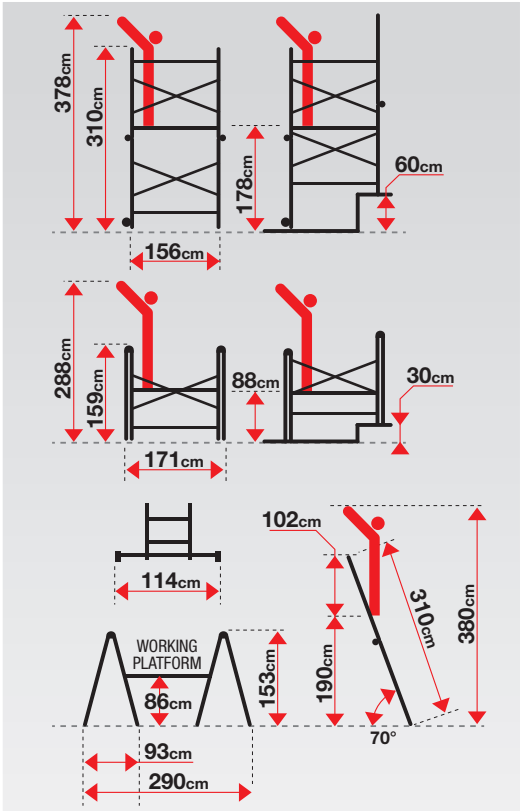

ASSEMBLING TIME

First time: **12min**

Next: **4min**

VERY FAST ASSEMBLING

ATTENTION!
Double position stabiliser bar.
Easy working close to the wall.

IMPORTANT



Code	kg	m³	vol.	Ean
PN	34,50	0,33	1	8028406106401

5 YEAR WARRENTY

MADE IN ITALY 100%

100 RANGE

310 cm

178 cm

150 kg MAX

EN131 EUROPEAN NORM

NFE 85-200

2PfG 1273/11.10

S 60080163

2012/3104

Norma gestione ecosostenibile delle foreste FSC

Controlled by FACAL

It means: FSC Norm - Environment respect

Easy movements

Platform

Folded, suitable for indoor use

5-YEAR WARRENTY

MADE IN ITALY 100%

100 RANGE

Pinna Clic

BASE: 114x156 cm
STRUCTURE: 58x156 cm
PLATFORM: 51x143 cm

150 kg MAX

NFE 85-200

- Aluminium scaffolding made up by:
  Stiles size: 24x60 mm
  Rungs: 30x30 mm
  2x6-rung base sections
  2x6-rung extension packs.
- Immediate connection between diagonals and horizontals through the expansion fastening system, actioned by long levers.

365 cm

Aluminium structure.
Non-slip and waterproof surface.
Melamine Eurodeck wood

Strong aluminium hooks, welded to the platform

Norma gestione ecosostenibile delle foreste FSC — Controlled by FACAL®

It means: **FSC Norm - Environment respect**

Ø 150 mm castor with steel support

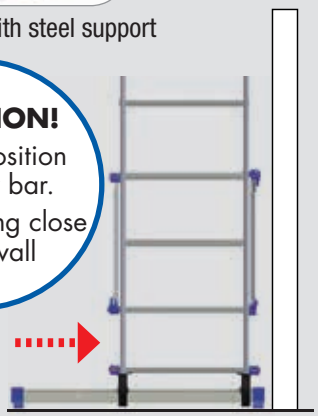

ATTENTION!
Double position stabiliser bar.
Easy working close to the wall

FAST ASSEMBLING
12min First time
4min Next

Registered patent

Fast steel tie-rods.
Steel connectors coated with nylon

Stairwell position

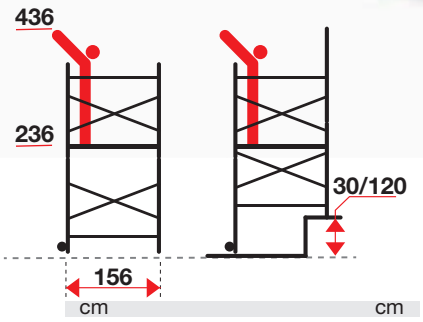

Easy movements

SUITABLE FOR DOMESTIC USE ONLY — vol.

Code	kg	m³		Ean
PN/CLI	34,4	0,37	1	8028406106678

5-YEAR WARRENTY | MADE IN ITALY 100%

100 RANGE

Pinna Clic·Clac

BASE: 114x156 cm
STRUCTURE: 58x156 cm
PLATFORM: 51x143 cm

150 kg MAX

NFE 85-200

- Aluminium scaffolding made up by:
  Stiles size: 24x60 mm
  Rungs 30x30 mm
  2x6-rung base section
  2x7-rung extension pack
  2x6-rung extension pack
- Immediate connection between diagonals and horizontals through the expansion fastening system, actioned by long levers.

Clac EXTENSION PACK

Code PN/PRO
(including 4 telescopic stabilisers + 1 platform + 2 horizontal braces)
kg: 33,00, vol.: 0,20 m³ Pieces: 1
EAN 8028406107743

Telescopic stabilisers.

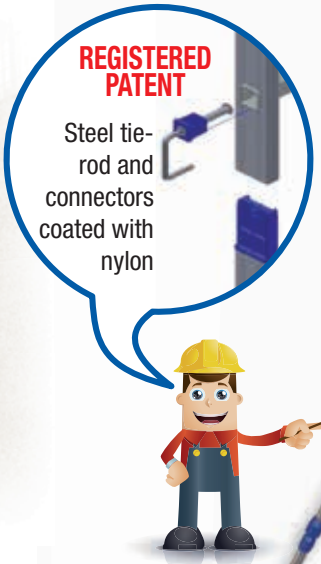

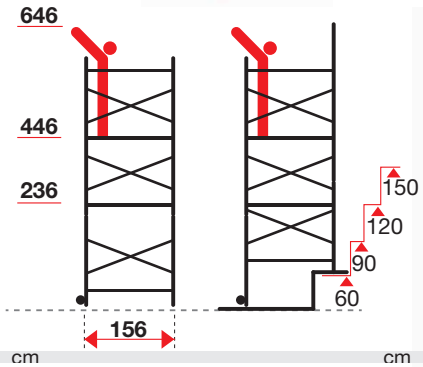

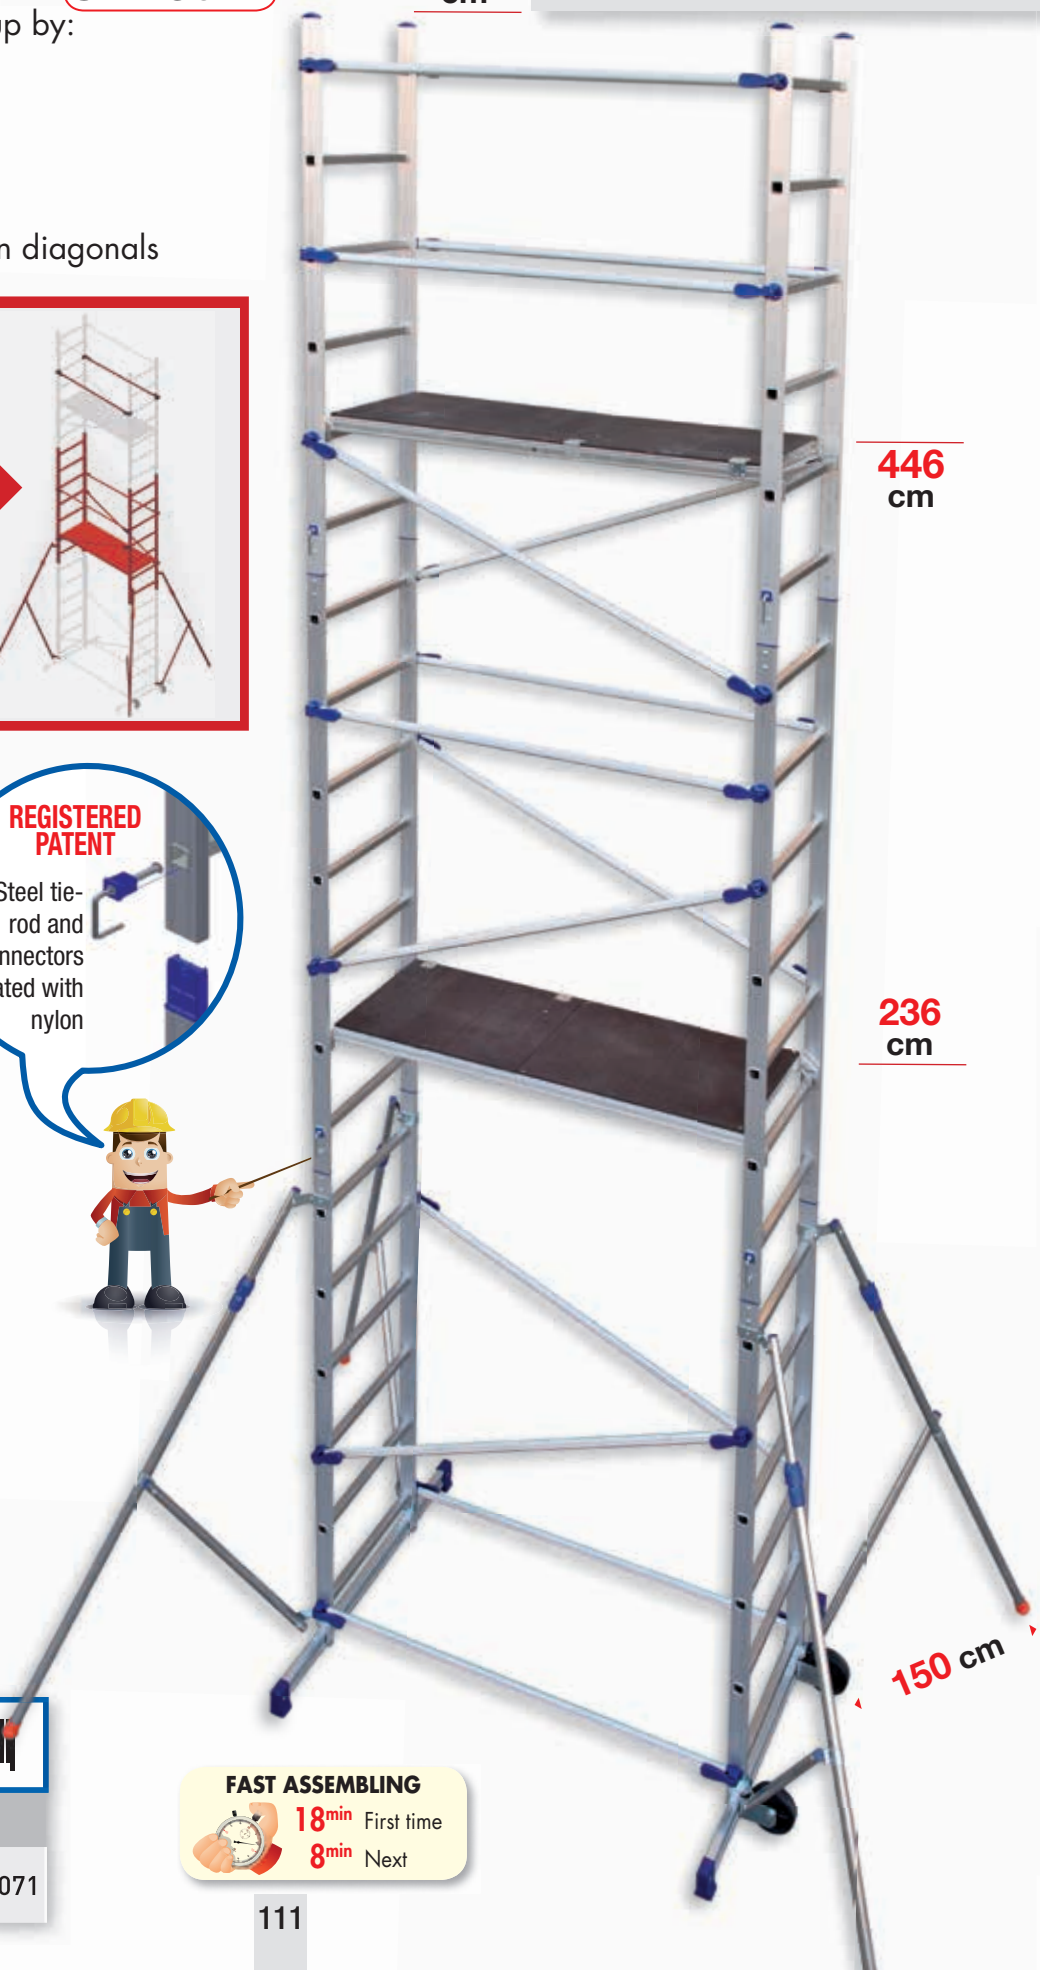

SUITABLE FOR DOMESTIC USE ONLY

Code	kg	m³	Pieces	Ean
PN/CLA	67,4	0,57	2	8028406107071

FAST ASSEMBLING
18min First time
8min Next

5-YEAR WARRENTY

MADE IN ITALY 100%

100 RANGE

PENNY

PLATFORM:
129x40 cm



150 kg MAX

S 60085377

Norma gestione ecosostenibile delle foreste FSC

Controlled by FACAL

It means: FSC Norm - Environment respect

- Compact aluminium scaffolding.
- Suitable for domestic use only.
- Provided with platform

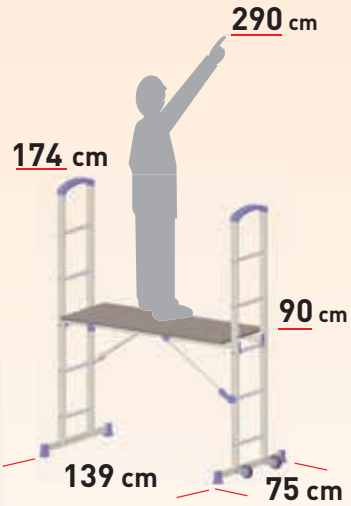



SAFETY: anti-overturning hooks

Easy movements thanks to the Ø 100 mm wheels

Stairwell position

SUITABLE FOR DOMESTIC USE ONLY

Code	(kg)	(m³)	Pieces	Ean
PEY	15	0,15	1	8028406106661

"PIEGO"

1 PLATFORM:
68x153 cm

150 kg MAX

- Aluminium folding scaffolding.
- Fast to assemble.
- Provided with horizontal and diagonal braces bag.
- Stiles si ze: 25x65 mm.
- Rungs size: 30x30 mm.
- 4 Ø 100 mm castors with brake.

S 60080180
2PfG 1273/11.10

Lockable gate junction

Nylon clutch for hinge rotation

30X30 mm square rungs

SAFETY:
Diagonals instant locking system through stainless steel springs

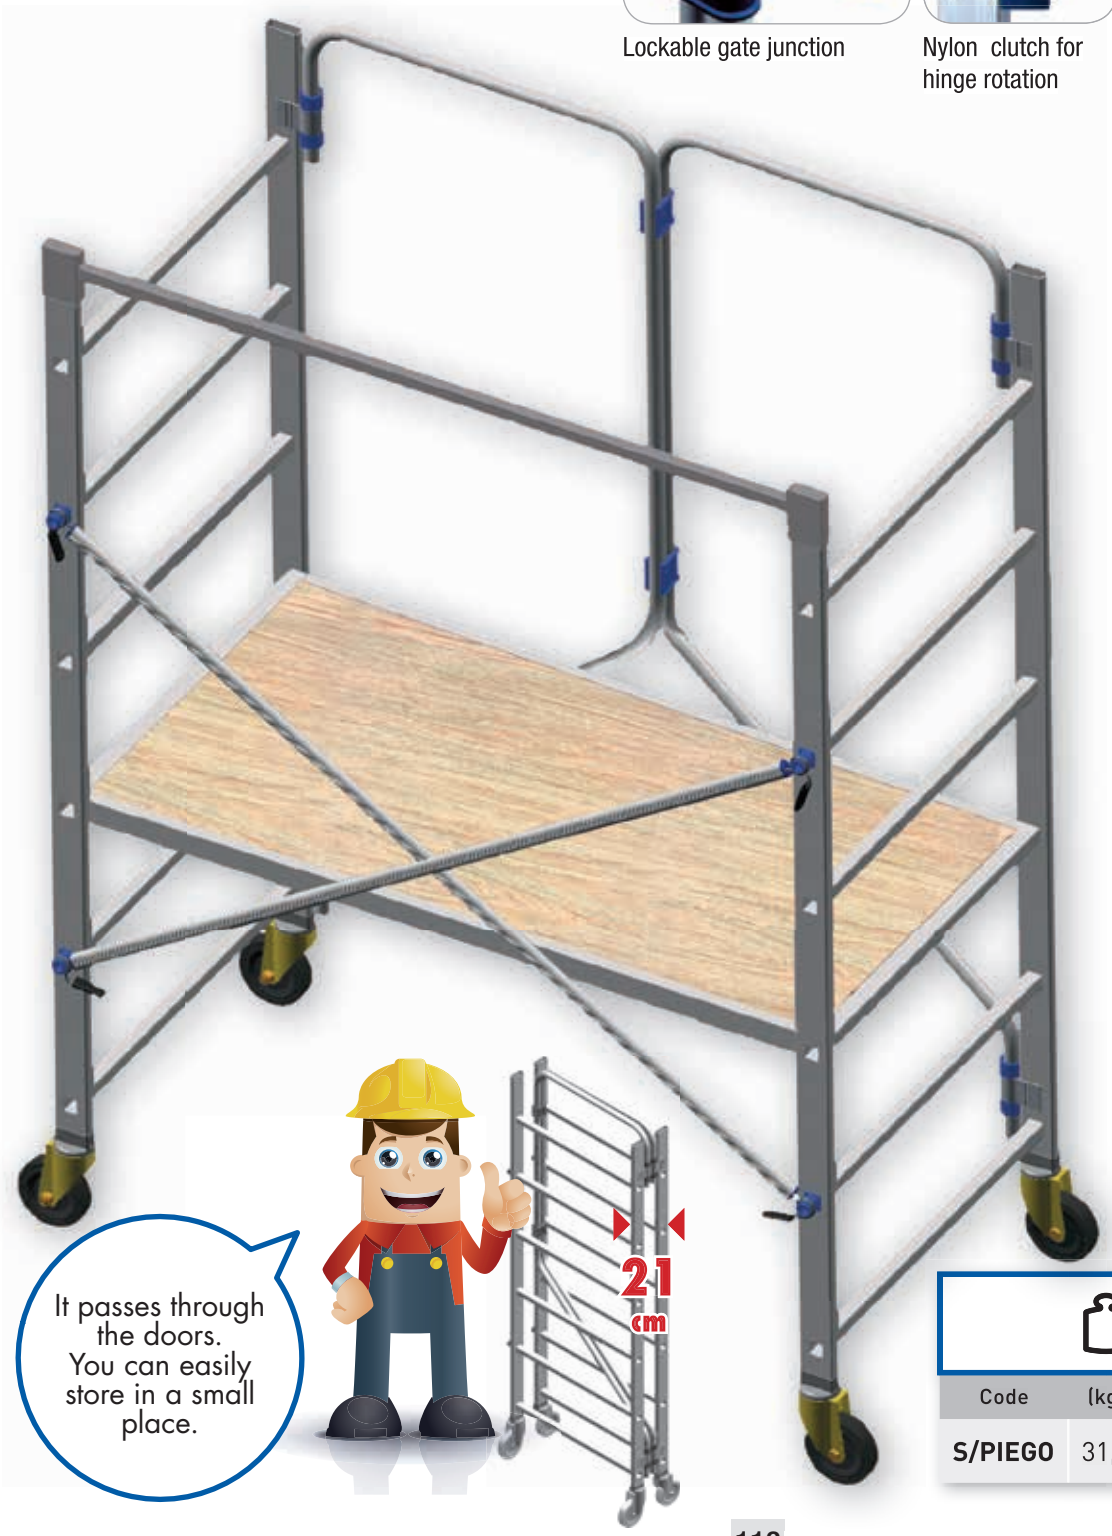

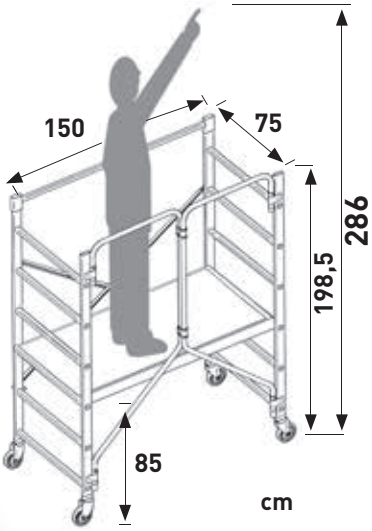

Code	(kg)	(m³)	Pieces	Ean
S/PIEGO	31,5	0,32	1	8028406035039

Notes

LEANING LADDERS

COMBINATION LADDERS

ROPE-OPERATED EXTENSION LADDERS / EXTENSION LADDERS

TELESCOPIC LADDERS / MULTIPURPOSE LADDERS

STEPLADDERS / DOUBLE-SIDED STEPLADDERS / SPECIAL LADDERS

WAREHOUSE STEPS / SHELF LADDERS / WORK PLATFORMS / BRIDGING PLATFORMS / FOLDING WORK PLATFORMS

VERTICAL LADDER WITH SAFETY CAGE

ALUMINIUM ACCESS TOWERS / SCAFFOLDINGS

STEEL ACCESS TOWERS / SCAFFOLDINGS

STEP STOOLS / SAWHORSES

HOUSEHOLD STEPLADDERS

LOADING RAMPS / GANGWAYS

STANDS & GRAPHICS

ACCESSORIES AND SPARE PARTS

SPAZIO

- Zinc-plated steel Ø 45 mm round tubular steel scaffold tower.
- Base elements fitted with levellers.
- Rubber castors with brakes.
- Aluminium platforms.

COMPONENTI PRINCIPALI

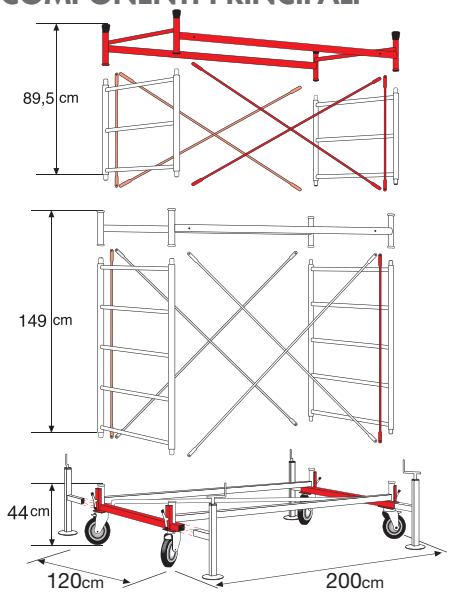

END EXTENSION SAFETY PACK

Code SPP

2x65 cm height ladder frames + 4 red diagonal braces + 2 red handrails + 2 side vertical protections

kg: 19,70, vol.: 0,09 m³, Packages: 2

EAN 8028406090069

EXTENSION PACK

Code SALZ

2x125 cm height ladder frames + 2 horizontal braces + 4 diagonal braces + 2 red vertical protections

kg: 28,80, vol.: 0,14 m³, Packages: 2

EAN 8028406090052

BASE PACK

Code SB

2 base elements + 2 horizontal braces + 1 diagonal brace + 4 telescopic levellers

kg: 53,20, vol.: 0,15 m³, Packages: 3

EAN 8028406090045

ALUMINIUM LADDER WITH HOOKS

Code D210/S

Sizes: 210X39 cm

kg: 4,0 vol.: 0,04 m³

EAN 8028406003694



FOLDING ALUMINIUM TOE BOARD

Code SPFP

kg: 15,0 vol.: 0,07 m³, Packages: 1

EAN 8028406090366



FIR SINGLE BOARD

Code STL

Sizes: 23 cm

EAN 8028406090236

ALUMINIUM PLATFORM WITH TRAPDOOR AND TOE BOARD

Code SPA/B

Dim.: 100x200 cm kg: 34,50, vol.: 0,11 m³, Packages: 2

EAN 8028406090243

ALUMINIUM PLATFORM WITH TRAPDOOR WITHOUT TOE BOARD

Code SPA/BS

Dim.: 100x200 cm kg: 19,50, vol.: 0,04 m³, Packages: 1

EAN 8028406107736

COMPOSITIONS (WITHOUT PLATFORMS)

Code S/1



EAN 8028406090038

Code S/2



EAN 8028406004035

Code S/3



EAN 8028406004042

Code S/4



EAN 8028406090250

Code S/5

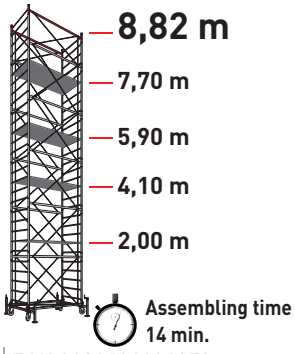

EAN 8028406004059

TOTAL HEIGHT		m	2,82	4,32	5,82	7,32	8,82
WORKING HEIGHT		m	3,62	5,12	6,60	8,10	9,60
LAST PLATFORM HEIGHT		m	1,70	3,20	4,70	6,20	7,70
Code	Description		Pieces	Pieces	Pieces	Pieces	Pieces
SB	Base pack with levellers		1	1	1	1	1
SALZ	Extension pack – 5 rungs		1	2	3	4	5
SPP	End extension pack - 3 rungs		1	1	1	1	1
		ONLY STRUCTURE	S/1	S/2	S/3	S/4	S/5
		kg	101,70	130,50	159,30	188,10	216,90
		m³	0,38	0,52	0,66	0,80	0,94
		Composition packages	7	9	11	13	15
SPA/B	Platform with trapdoor and toe board		1	1	1	1	1
SPA/BS	Platform with trapdoor without toe board				1	2	3
		STRUCTURE INCLUDING PLATFORMS	S/1C	S/2C	S/3C	S/4C	S/5C
		kg	136,20	165,00	213,30	261,60	309,90
		m³	0,49	0,63	0,81	0,99	1,17
		Composition packages	9	11	14	17	20

2 YEAR WARRANTY

MADE IN ITALY 100%

PRO 300 RANGE

200 kg MAX

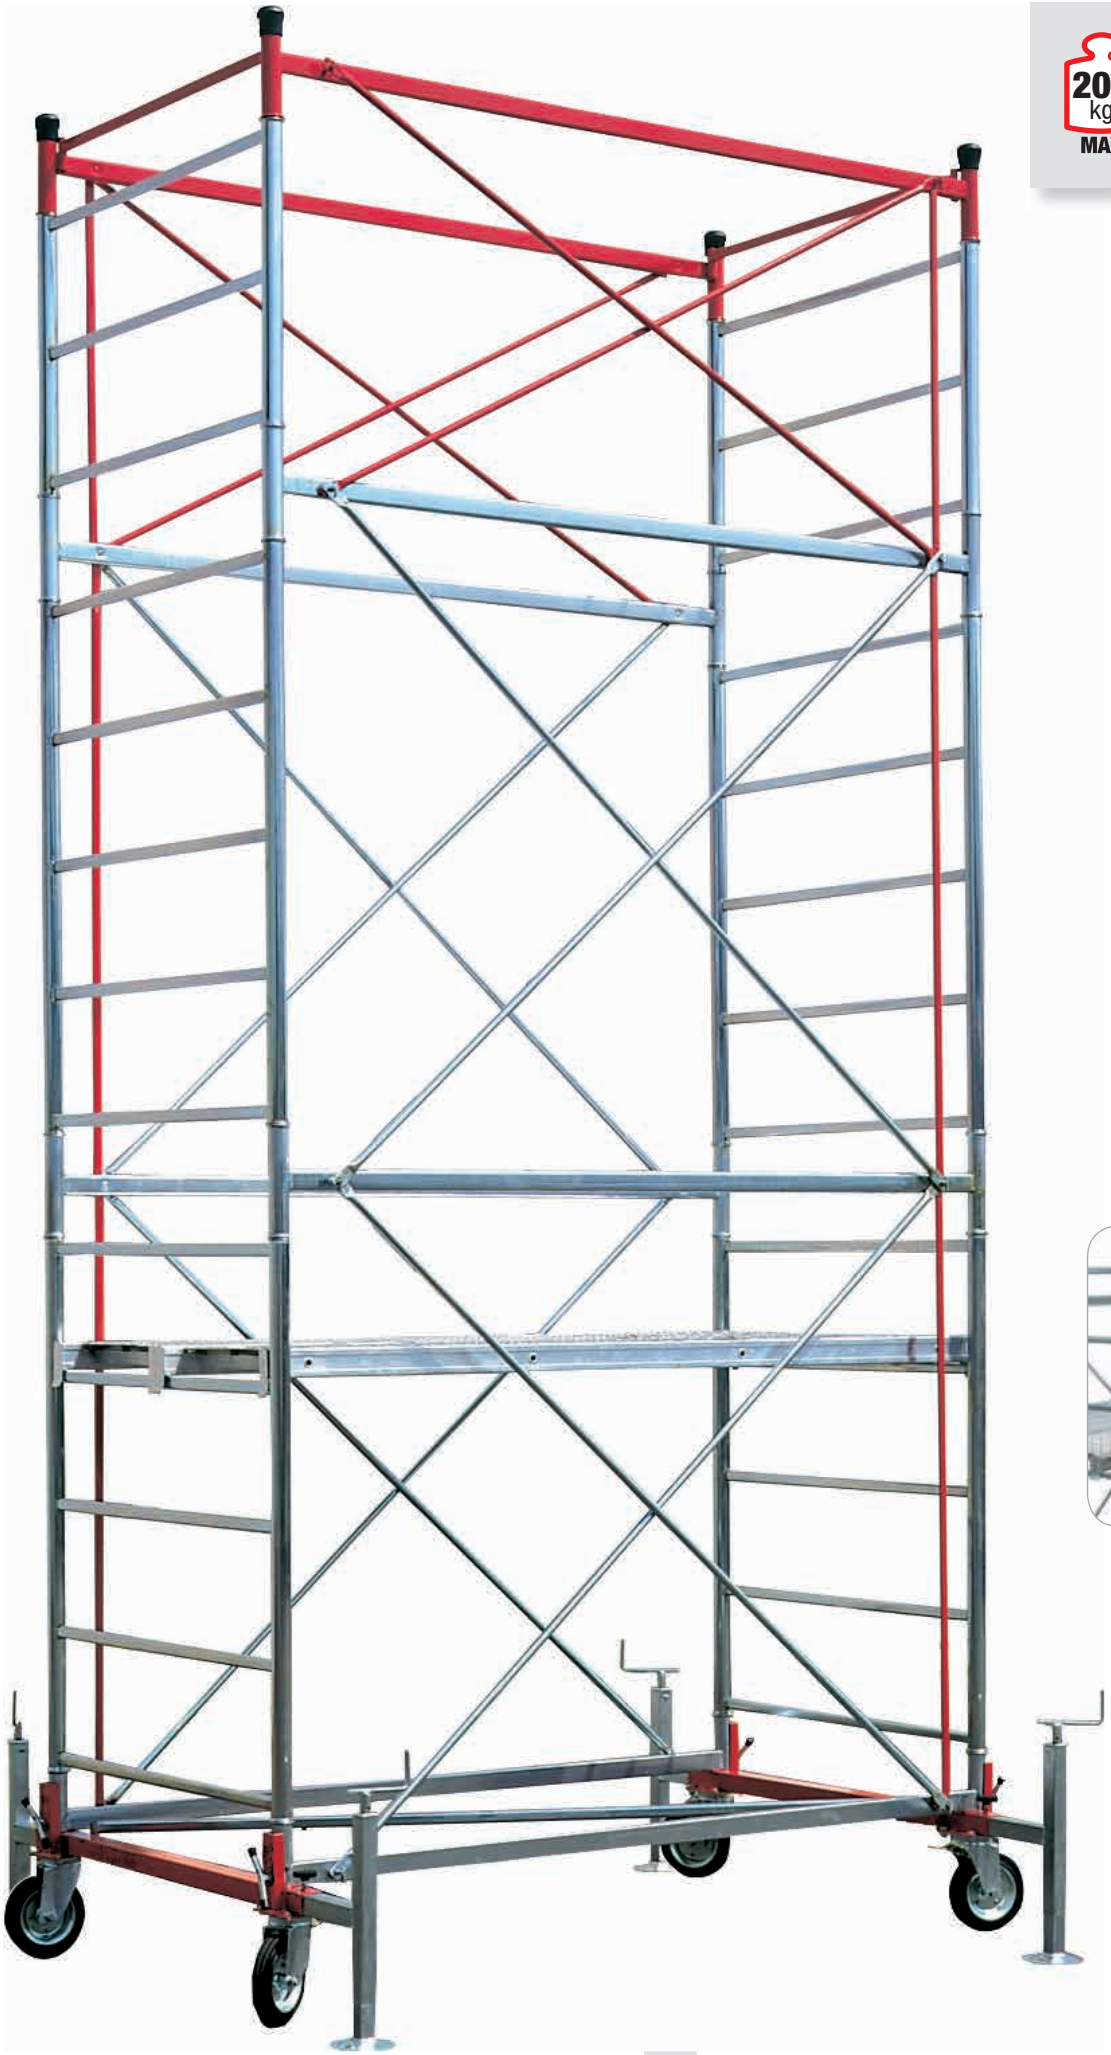

End safety pack

Horizontal brace

Base element with castors and levellers

Aluminium platform

2-YEAR WARRANTY

MADE IN ITALY 100%

FIERO

100 kg MAX

- Zinc-plated steel scaffolding.
- Ø 35 mm round tubular.
- Solid pine wood platform.

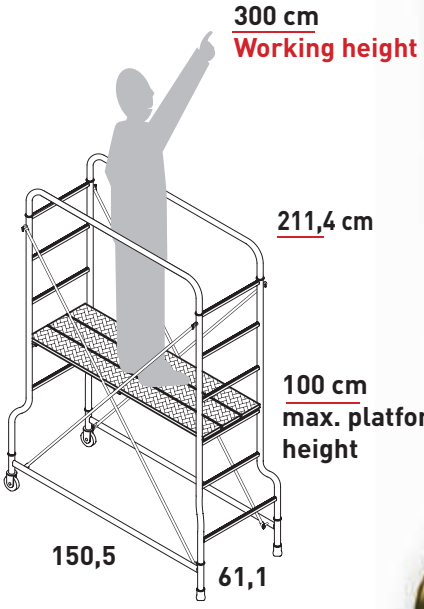

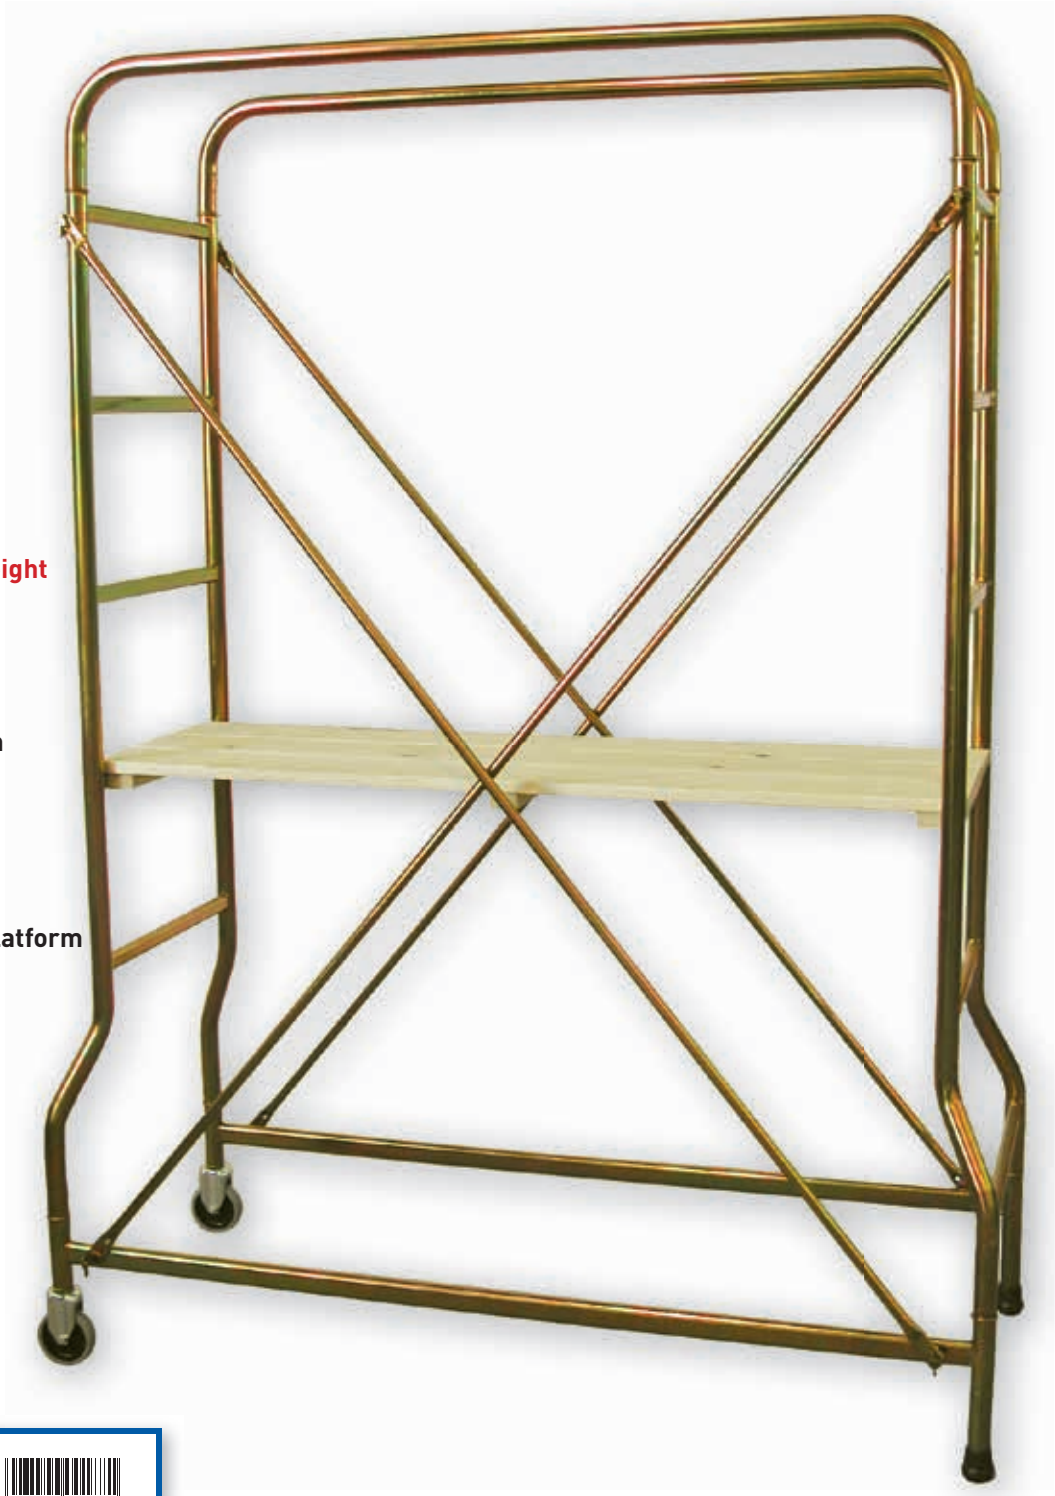

Code	(kg)	(m³)	Ean
FIERO	29,2	0,13	8028406102465

2 -YEAR WARRANTY

MADE IN ITALY 100%

100 RANGE

PONY

100 kg MAX

- Zinc-plated steel scaffolding.
- 40X20 mm oval-shaped tubular.
- Practical and easy to handle and assemble.
- Two solid pine wood 22x110 cm half platforms.

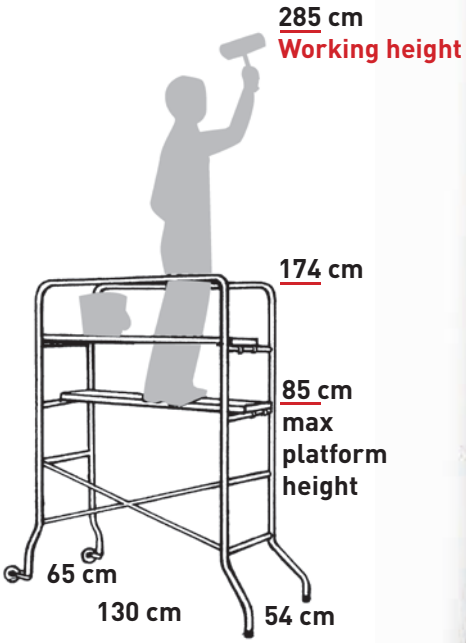

Code	(kg)	(m³)	Ean
PONY	18,0	0,10	8028406090014

2-YEAR WARRANTY

MADE IN ITALY 100%

Mito

BASE:
85x154 cm

STRUCTURE:
76x154 cm

2 PLATFORMS:
30x155 cm

120 kg MAX

- Zinc-plated steel Ø 35 mm x 1,5 mm thickness round tubular steel scaffold tower.
- Suitable for industrial, indoor use.
- Diagonal braces are connected in only one piece with horizontal braces.

Ladder frames connection

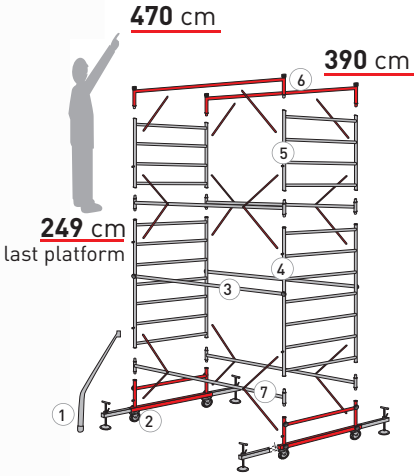

1	Stabiliser	4 pcs
2	Base element with Ø 125 castors	2 pcs
3	Safety rail	2 pcs
4	200 mm height ladder frame	2 pcs
5	100 mm height ladder frame	2 pcs
6	Handrails	2 pcs
7	Horizontal brace with 4 diagonal braces	4 pcs

You can fold it. It passes through the doors

Fitted with two half wooden platforms



Practical stairwell device to be used on stairs.

ACCESSORY not included: leveller

Code	(kg)	(m³)	(Pieces)	Ean
MITO	63	0,40	7	8028406090021

LEANING LADDERS

COMBINATION LADDERS

ROPE-OPERATED EXTENSION LADDERS / EXTENSION LADDERS

TELESCOPIC LADDERS / MULTIPURPOSE LADDERS

STEPLADDERS / DOUBLE-SIDED STEPLADDERS / SPECIAL LADDERS

WAREHOUSE STEPS / SHELF LADDERS / WORK PLATFORMS / BRIDGING PLATFORMS / FOLDING WORK PLATFORMS

VERTICAL LADDER WITH SAFETY CAGE

ALUMINIUM ACCESS TOWERS / SCAFFOLDINGS

STEEL ACCESS TOWERS / SCAFFOLDINGS

STEP STOOLS / SAWHORSES

HOUSEHOLD STEPLADDERS

LOADING RAMPS / GANGWAYS

STANDS & GRAPHICS

ACCESSORIES AND SPARE PARTS

INTENSIVE USE

10-YEAR WARRANTY

MADE IN ITALY 100%

"DUPLA"

150 kg MAX

EN131 EUROPEAN NORM

S 60080275

- Aluminium double-sided professional step stool.
- 85 mm treads.
- Stile size: 24x60 mm.
- Aluminium die casting hinges.
- Steel folding anti-splay bars.

Code	Treads number	(cm)	(cm)	(cm)	(cm)	(cm)	(kg)	(m³)	Ean
D-2	2+plat.	57	257	55	41	62	4,2	0,04	8028406102571
D-3	3+plat.	80	280	72	44	87	5,4	0,06	8028406002505
D-4	4+plat.	103	303	90	47	112	6,6	0,08	8028406002512

68° 68° cm 17 cm 34

This product is delivered with a PVC wrap film and product leaflet

INTENSIVE USE

10-YEAR WARRANTY

MADE IN ITALY 100%

SUPER PRO 600 RANGE

Tecnici

- Welded fix step stools.
- Suitable for professional use e.g. in workshops, for machinery maintenance, loading platforms, supermarkets.
- EXTREME SAFETY SAFETY DEVICES

150 kg MAX

EU EN14183 EUROPEAN NORM

www.tuv.com TÜVRheinland ID:1000000000 GS geprüfte Sicherheit

R 60025968 01



RIGOLO

Code RG-2

kg: 5; m³: 0,12

EAN 8028406000457



PLANO

Code PL-3

kg: 8,5; m³: 0,31

EAN 8028406000488



RIGOLO PLUS

Code RG-2PL

kg: 5,8; m³: 0,18

EAN 8028406106982

— Inactive castors



PLANO MAXI

Code PL-4

kg: 12,0; m³: 0,43

EAN 8028406090335



PALCO

Code PLC-2

kg: 13,4; m³: 0,61

EAN 8028406106999

— Inactive castors

Codice	treads number	(cm)	(cm)	(cm)	(cm)
RG-2	2	50	36	50	36
RG-2PL	2	43	42	54	42
PL-3	3	77	55	78	55
PL-4	4	97	55	78	55
PLC-2	2	70	50	64	44

10-YEAR WARRANTY | MADE IN ITALY 100%

SUPER PRO 600 RANGE

Cava

- Aluminium folding sawhorses

300 kg MAX

R 60080289

Aluminium die casting hinge

Steel anti-splay bars

Code	(cm)	(cm)	(cm)	(kg)	(m³)	Ean
CAVA	83,5	90,0	17	6,0	0,043	8028406000518

5-YEAR WARRANTY | MADE IN ITALY 100%

PRO 300 RANGE

Zinko

- Zinc-plated steel sawhorse.
- Piano hinge along its length for maximum stability.

200 kg MAX

R 60080289

Code	(cm)	(cm)	(cm)	(kg)	(m³)	Ean
CAVZ	80	88	3	2,8	0,035	8028406000495

"TAGLIALEGNA"

55/TS

- 40x20 mm zinc-plated steel folding log sawhorse.

54/TC

- Zinc-plated steel folding log sawhorse with chainsaw clamp.
- Slips made of corrugated galvanized iron sheet (log holder).
- Varnished steel safety chainsaw cover.
- Adjustable measuring rod to calibrate cutting.

Art.	Code	(cm)	(cm)	(cm)	(kg)	(m³) vol.	Ean
55/TS	CAV/S	103	62	8	7,5	0,026	8028406003212
54/TC	CAV/C	Open: 62 Closed: 100	Open: 85 Closed: 85	8	9,5	0,068	8028406003229

Notes

LEANING LADDERS

COMBINATION LADDERS

ROPE-OPERATED EXTENSION LADDERS / EXTENSION LADDERS

TELESCOPIC LADDERS / MULTIPURPOSE LADDERS

STEPLADDERS / DOUBLE-SIDED STEPLADDERS / SPECIAL LADDERS

WAREHOUSE STEPS / SHELF LADDERS / WORK PLATFORMS / BRIDGING PLATFORMS / FOLDING WORK PLATFORMS

VERTICAL LADDER WITH SAFETY CAGE

ALUMINIUM ACCESS TOWERS / SCAFFOLDINGS

STEEL ACCESS TOWERS / SCAFFOLDINGS

STEP STOOLS / SAWHORSES

HOUSEHOLD STEPLADDERS

LOADING RAMPS / GANGWAYS

STANDS & GRAPHICS

ACCESSORIES AND SPARE PARTS

5-YEAR WARRENTY

MADE IN ITALY 100%

100 RANGE

EURO DOMUS

NORMAL

150 kg MAX

EN131 EUROPEAN NORM

Z1A 1305 27944

- Aluminium household stepladder.
- Wide, non-slip aluminium treads.
- Tread/stile connection through double rivets on the climbing sides.

Safety handrail

Hinge





Steel painted platform

COLOUR:

Orange
RAL 2009

Non-slip rubber feet

	Code NORMAL	Treads number with platform	(cm)	(cm)	(cm)	(cm)	(cm)	(cm)	(kg)	(m³)	
EN131 European Norm	E3/N	3	62	126	242	69	43,5	139	3,40	0,03	8028406002529
	E4/N	4	84	149	273	84	47	163	4,00	0,05	8028406002536
	E5/N	5	106	173	286	98	50	187	4,80	0,07	8028406002543
	E6/N	6	128	192	310	113	53	210	5,40	0,08	8028406002550
	E7/N	7	151	218	331	130	56	234	6,00	0,10	8028406002567

40x20 mm
35x20 mm
72°
75°
60 cm
10 cm

This product is delivered with a PVC wrap film and product leaflet

5-YEAR WARRENTY

MADE IN ITALY 100%

100 RANGE

EURO DOMUS PLUS

150 kg MAX

EN131 EUROPEAN NORM

Z1A 1305 27944

- Aluminium household stepladder.
- Wide, non-slip aluminium treads.
- Tread/stile connection through double. rivets on the climbing sides.
- 2 available colours:

Orange RAL 2009

Black RAL 9004

Integrated tool tray and hook





Steel painted platform

	Code NORMAL	Treads number with platform	(cm)	(cm)	(cm)	(cm)	(cm)	(cm)	(kg)	(m^3)	
EN131 European Norm	E3/P	3	62	126	242	69	43,5	139	3,40	0,03	8028406107002
	E4/P	4	84	149	273	84	47	163	4,00	0,05	8028406107019
	E5/P	5	106	173	286	98	50	187	4,80	0,07	8028406107026
	E6/P	6	128	192	310	113	53	210	5,40	0,08	8028406107033
	E7/P	7	151	218	331	130	56	234	6,00	0,10	8028406107040

40x20 mm 35x20 mm | 72° | 75° | 60 cm | 10 cm

This product is delivered with a PVC wrap film and product leaflet

COLORETTE

100 kg MAX

- Steel household stepladder.
- Coated with epossidic powder.
- Available colours:
- Grey with black feet and straps.
- Blue with orange feet and straps.
- Eight-sided stiles:
  Climbing side 35x20 mm.
  Back side 30x20 mm.
- 80 mm welded rungs.

Code	Treads with plat.	(cm)	(cm)	(cm)	(cm)	(cm)	(cm)	(kg)	(m^3)	Ean
C04	4	83	143	300	81	46	153	5,50	0,049	**8028406002581**
C05	5	106	166	320	96	49	176	6,10	0,061	**8028406002598**
C06	6	127	187	340	111	52	199	7,30	0,072	**8028406002604**
C07	7	149	209	360	126	55	222	8,00	0,088	**8028406002994**
C08	8	170	230	380	141	58	245	9,30	0,110	**8028406003007**

This product is delivered with a PVC wrap film and product leaflet

72° 75° 60 cm 7 cm

2-YEAR WARRANTY

100 RANGE

150 kg MAX

EU EN14183 EUROPEAN NORM

Tinto

- 20X15 mm tubular steel step stool.
- 20x30 mm steel treads.
- Coated with epossidic powder.
- Available colours:
  Grey structure, black treads
  orange plastics

STRUCTURE	PLASTICS
TREADS	

SUITABLE FOR DOMESTIC USE ONLY

Code	Treads number	(cm)	(cm)	(cm)	(cm)	(cm)	(cm)	(cm)	(kg)	(m³)	Ean
T2	2	50	81,5	240	56,5	46	4,5	89	4,0	0,021	8028406003205
T3	3	75	104,5	265	75	46	5	114,5	6,0	0,026	8028406003199
T4	4	100	126,5	290	82	46	5,5	141	7,8	0,032	8028406107965
T02	2	47,5	82	238	59	47	17	96	4,8	0,076	8028406107972
T03	3	71	117	261	67	47	17	130	7,6	0,100	8028406107989
T04	4	94,5	140	288	85	49	17	156	9,2	0,120	8028406107996

This product is delivered with a PVC wrap film and product leaflet

Tonto

- Ø 25 mm tubular steel step stool.
- Steel treads covered with 20x30 non slip rubber.
- Coated with epossidic powder.
- Available colours:
  White structure, white treads
  black plastics.

STRUCTURE	PLASTICS
TREADS	

Grey structure, grey treads, black plastics.

STRUCTURE	PLASTICS
TREADS	

TONTO-4: only grey

Notes

LEANING LADDERS

COMBINATION LADDERS

ROPE-OPERATED EXTENSION LADDERS / EXTENSION LADDERS

TELESCOPIC LADDERS / MULTIPURPOSE LADDERS

STEPLADDERS / DOUBLE-SIDED STEPLADDERS / SPECIAL LADDERS

WAREHOUSE STEPS / SHELF LADDERS / WORK PLATFORMS / BRIDGING PLATFORMS / FOLDING WORK PLATFORMS

VERTICAL LADDER WITH SAFETY CAGE

ALUMINIUM ACCESS TOWERS / SCAFFOLDINGS

STEEL ACCESS TOWERS / SCAFFOLDINGS

STEP STOOLS / SAWHORSES

HOUSEHOLD STEPLADDERS

LOADING RAMPS / GANGWAYS

STANDS & GRAPHICS

ACCESSORIES AND SPARE PARTS

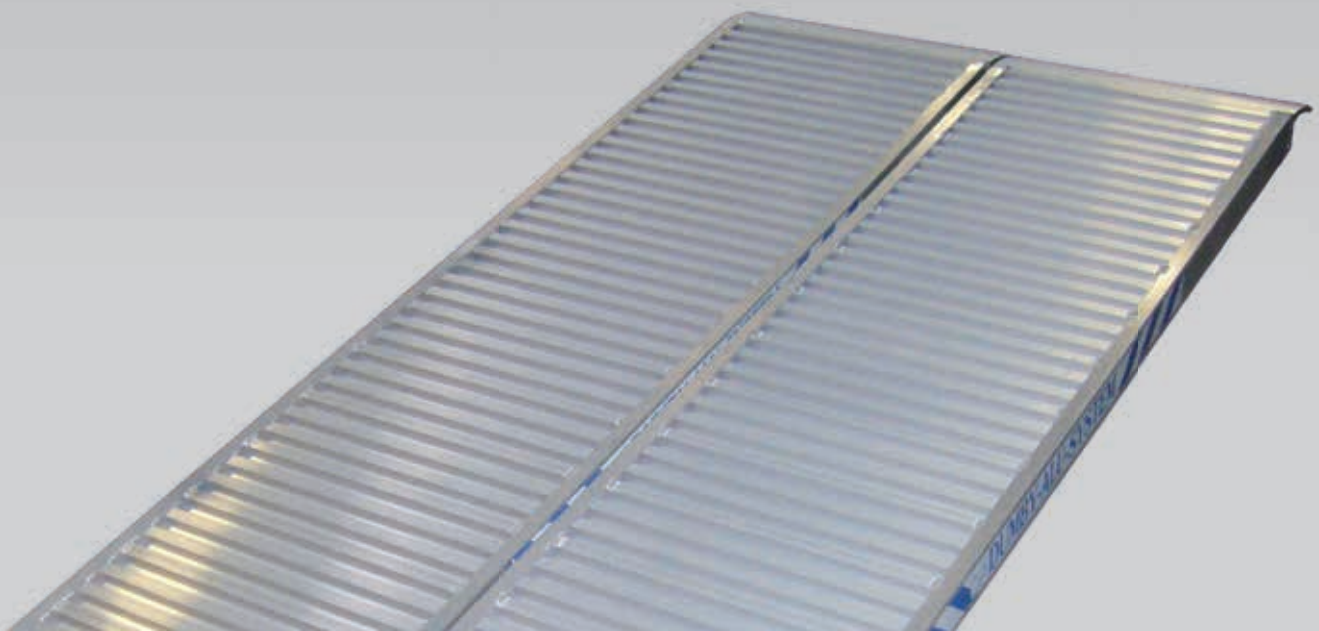

SUPER PRO 600 RANGE

KARGO-ALU-SYSTEM

- Suitable for professional tired vehicles loading/unloading.
- Realized with special aluminium alloys.

FASTENINIG



A- Though ABR locking device (accessory)



B- With Ø 12 mm hole in the middle of landing. You have to drill the loading bed too and lock it with a plug

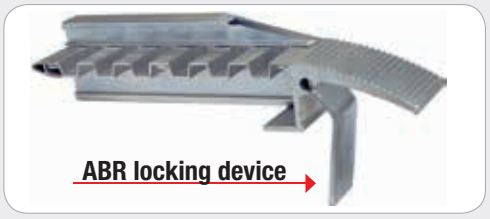

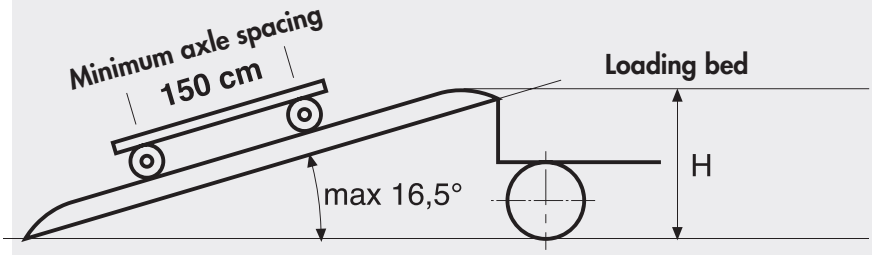

Max. slope 30% = 16,5°

THE RIGHT RAMP

$$\text{RAMP LENGTH (cm)} = \frac{\text{Loading bed height (cm)} \times 30 \times 100}{1000}$$

	Code	Loading capacity per pair	(cm)	(cm)	(cm)	(cm)	(cm) h shoulder	Weight (1 piece)	(m^3)	Ean
SERIE LEGGERA	RL30/15	1.600	152	7,5	30	24	-	9,5	0,034	8028406000594
	RL30/20	1.400	197	7,5	30	24	-	12,4	0,044	8028406000600
	RL30/25	1.200	242	7,5	30	24	-	14,9	0,054	8028406000617
	RL30/30	1.000	302	7,5	30	24	-	18,3	0,068	8028406000624
	RL30/35	750	347	7,5	30	24	-	20,8	0,078	8028406000631
	R1/18	2.000	300	10,5	37	30	3,0	24	0,117	8028406000648
	R2/15	1.800	350	10,5	37	30	3,0	28	0,136	8028406000655
	R3/13	1.500	400	10,5	37	30	3,0	32	0,155	8028406000662
	R4/39	4.600	300	13,5	41	32	3,5	36	0,166	8028406000679
	R5/31	3.700	350	13,5	41	32	3,5	41	0,194	8028406000686
	R6/26	3.100	400	13,5	41	32	3,5	47	0,221	8028406000693
	R7/54	6.200	300	15	50	40	2,0	49	0,225	8028406000709
	R8/44	5.200	350	15	50	40	2,0	59	0,263	8028406000716
	R9/36	4.200	400	15	50	40	2,0	65	0,300	8028406000723
	ABR	Steel locking device to fix the ramp (between loading bed and tailboard)								8028406000730

INTENSIVE USE

10-YEAR WARRANTY

MADE IN ITALY 100%

SUPER PRO 600 RANGE

TÜV SÜD

AL/961227944001

Light and easy to handle

Load-bearing abutment

Suitable for professional tired vehicles loading/ unloading

INTENSIVE USE

10-YEAR WARRANTY

MADE IN ITALY 100%

SUPER PRO 600 RANGE

DUMBY-ALU-SYSTEM

TÜV SÜD

AL/961227944001

- Pedestrian or vehicular gangways made of special aluminium alloy.
- They are edgeless and they can be placed side by side to create wide surfaces.
- Non-slip corrugated galvanized platform.
- 80 mm load-bearing abutment.
- Rounded landing end.
- Diagonal cut ashore.
- Outer width: 60 cm.

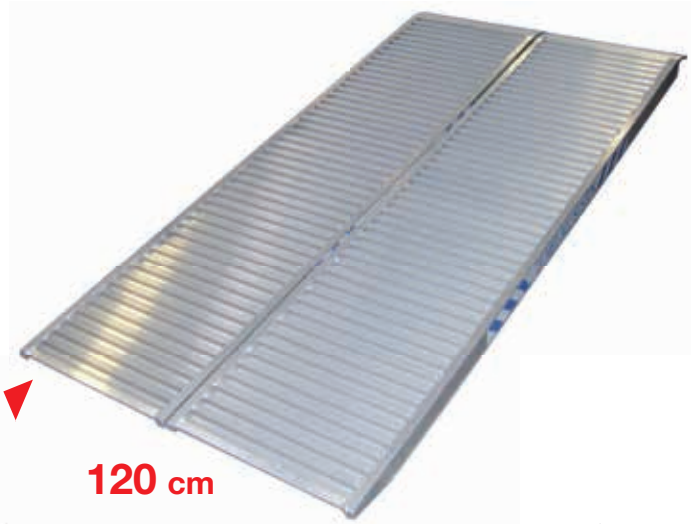

120 cm

80 mm

60 cm

FASTENING



A- Though **ABR** locking device (accessory)

B- With Ø 12 mm hole in the middle of landing. You have to drill the loading bed too and lock it with a plug

Code	(kg)	(cm)	(kg)	(m^3)	Ean
PA1/150	750	150	14	0,095	8028406000747
PA2/200	700	200	20	0,126	8028406000754
PA3/250	650	250	25	0,158	8028406000761
PA4/300	550	300	30	0,189	8028406000778
PA5/350	500	350	34	0,221	8028406000785
PA6/400	450	400	38	0,252	8028406000792

Loading capacity referred to max. 30% slope

Reference angle: 16°

LEANING LADDERS

COMBINATION LADDERS

ROPE-OPERATED EXTENSION LADDERS / EXTENSION LADDERS

TELESCOPIC LADDERS / MULTIPURPOSE LADDERS

STEPLADDERS / DOUBLE-SIDED STEPLADDERS / SPECIAL LADDERS

WAREHOUSE STEPS / SHELF LADDERS / WORK PLATFORMS / BRIDGING PLATFORMS / FOLDING WORK PLATFORMS

VERTICAL LADDER WITH SAFETY CAGE

ALUMINIUM ACCESS TOWERS / SCAFFOLDINGS

STEEL ACCESS TOWERS / SCAFFOLDINGS

STEP STOOLS / SAWHORSES

HOUSEHOLD STEPLADDERS

LOADING RAMPS / GANGWAYS

STANDS & GRAPHICS

ACCESSORIES AND SPARE PARTS

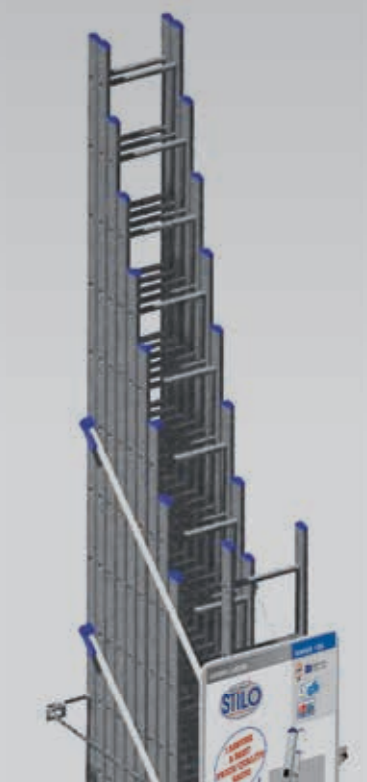

BELLAVISTA

- Stands collection with dynamic shapes.

A TYPE

A/1 Proposal

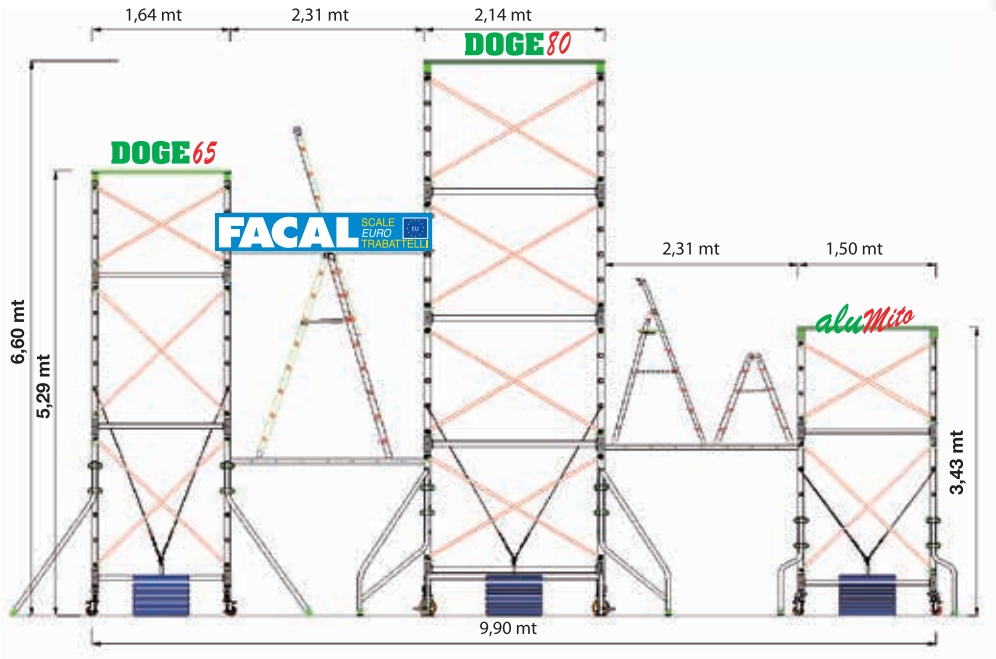

CODE
DOGE65 DG6/3C
DOGE80 DG8/3C
ALUMITO AMST
DAMA D260-3
QUADRA Q50/6
DUPLA STEPSTOOL D-4
SMALL STABILISERS D661
MAXI STABILISERS D660
MAXI STABILISERS D809
LEVELLERS D675
LEVELLERS D802
PLATFORM WITH TRAPDOOR D664
PLATFORM WITH TRAPDOOR D806
DOGE 65 SAFETY KIT D670
DOGE 80 SAFETY KIT D803

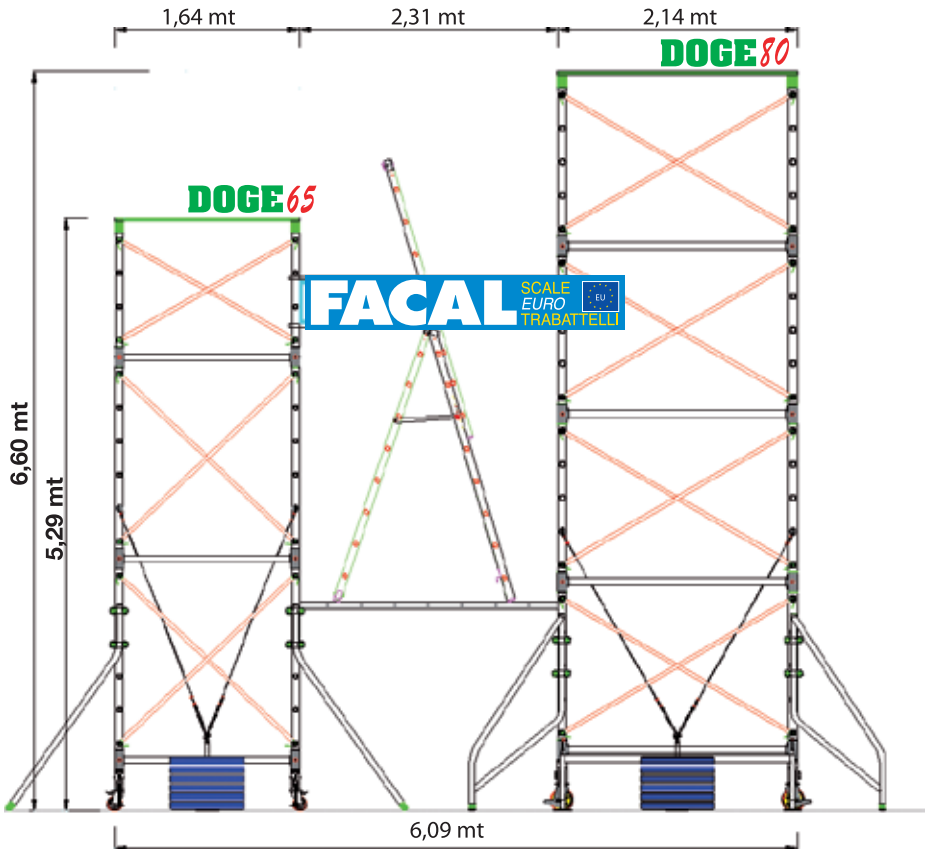

A/2 Proposal

CODE
DOGE 65 DG6/3C
DOGE 80 DG8/3C
DAMA D260-3
BIG STABILISERS D661
MAXI STABILISERS D809
LEVELLERS D675
LEVELLERS D802
PLATFORM WITH TRAPDOOR D664
PLATFORM WITH TRAPDOOR D806
DOGE 65 SAFETY KIT D670
DOGE 80 SAFETY KIT D803

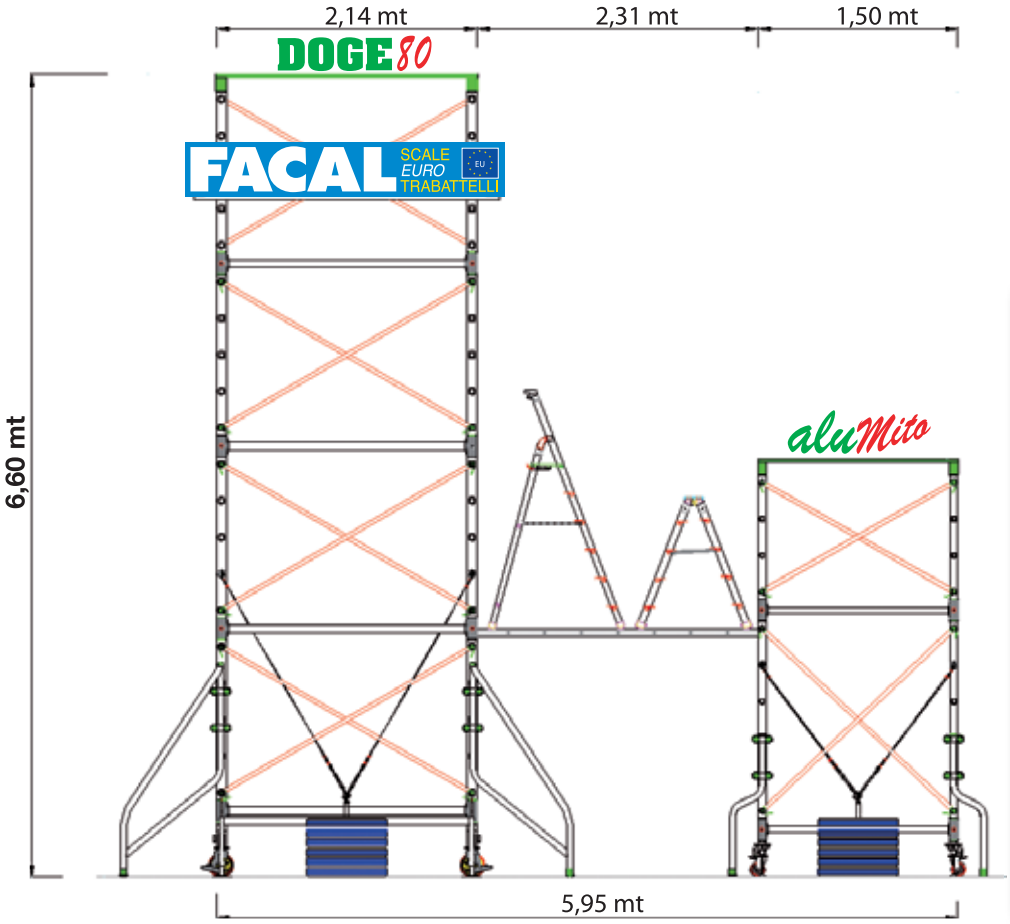

A/3 Proposal

CODE
DOGE 80 DG8/3C
ALUMITO AMST
QUADRA Q50/6
DUPLA STEPSTOOL D-4
SMALL STABILISERS D660
MAXI STABILIZERS D809
LEVELLERS D802
PLATFORM WITH TRAPDOOR
DOGE 80 SAFETY KIT D803

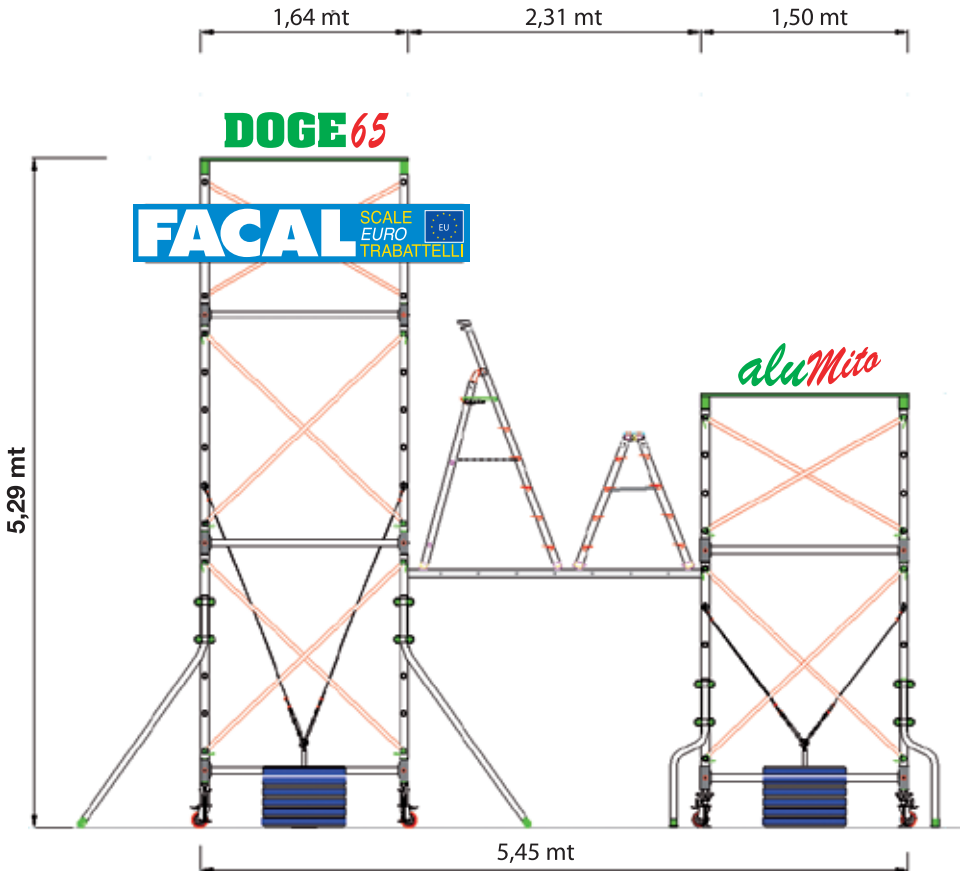

A/4 Proposal

CODE
DOGE 65 DG6/3C
ALUMITO AMST
QUADRA Q50/6
DUPLA STEPSTOOL D-4
BIG STABILISERS D661
SMALL STABILISERS D660
LEVELLERS D675
PLATFORM WITH TRAPDOOR D664
DOGE 65 SAFETY KIT

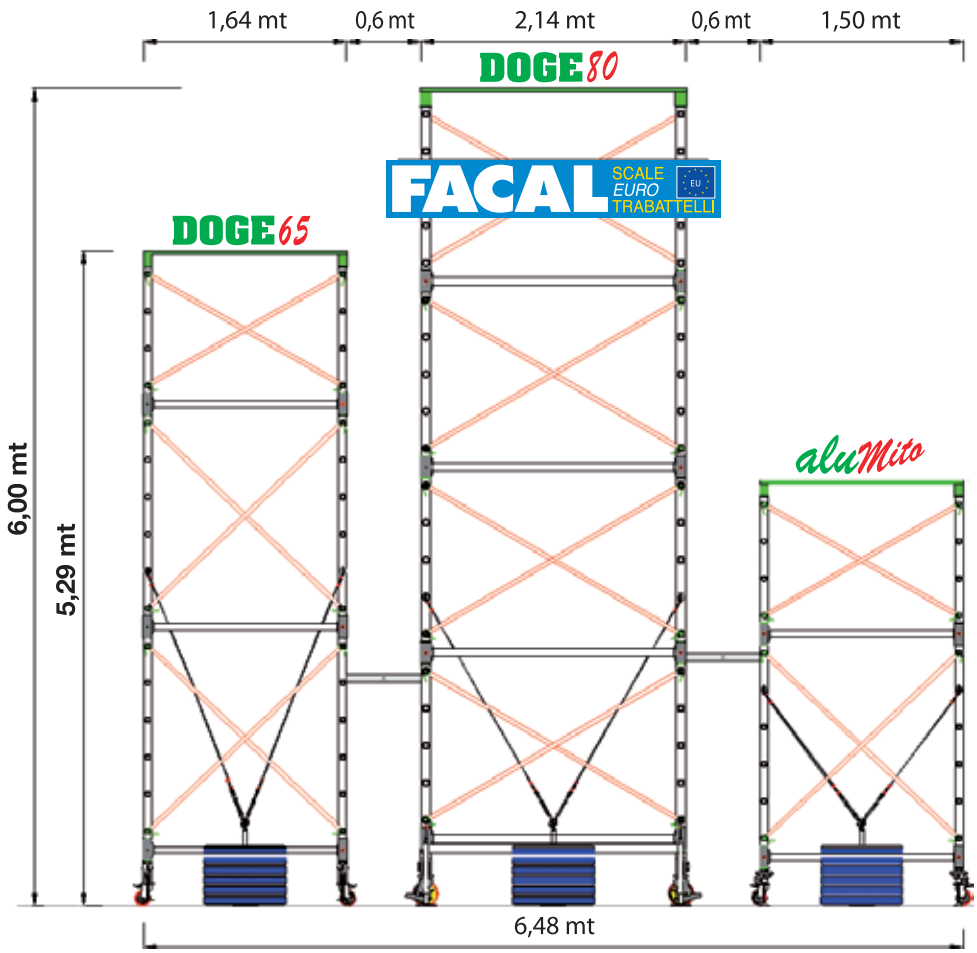

A/5 Proposal

CODE
DOGE 65 DG6/3C
DOGE 80 DG8/3C
ALUMITO AMST
BIG STABILISERS D660
MAXI STABILIZERS D809
LEVELLERS D675
LEVELLERS D802
PLATFORM WITH TRAPDOOR D664
PLATFORM WITH TRAPDOOR D806
DOGE 65 SAFETY KIT D670
DOFE 80 SAFETY KIT D803
KIT PROTEZIONE DOGE80 D803

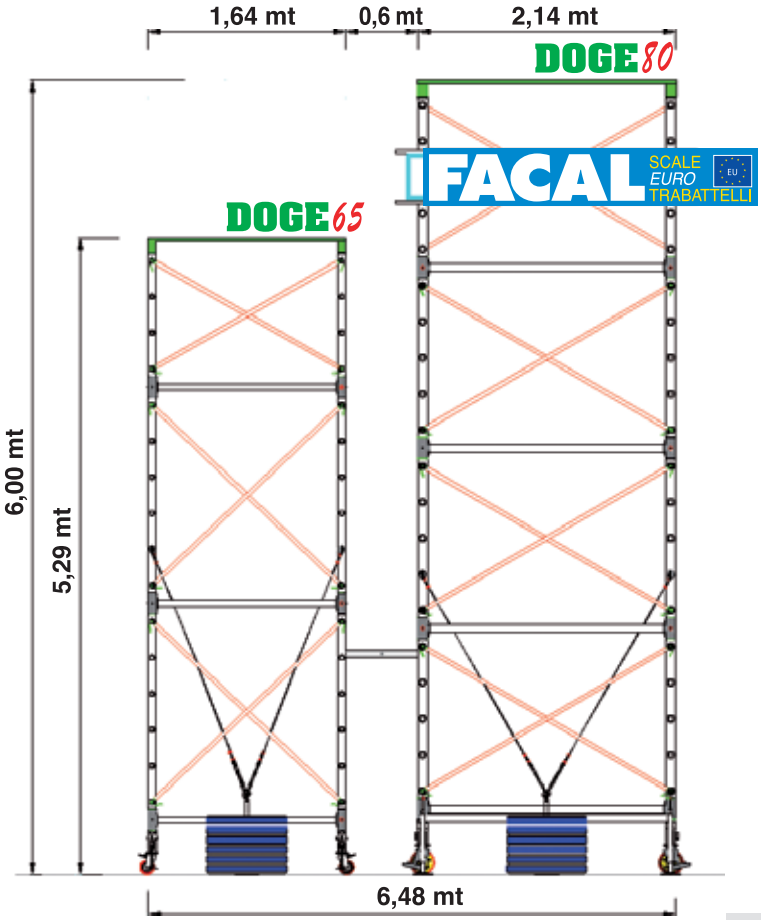

A/6 Proposal

CODE
DOGE 65 DG6/3C
DOGE 80 DG8/3C
BIG STABILISERS D661
MAXI STABILISERS D809
LEVELLERS D675
LEVELLERS D802
PLATFORM WITH TRAPDOOR D664
PLATFORM WITH TRAPDOOR D806
DOGE 65 SAFETY KIT
DOGE 80 SAFETY KIT

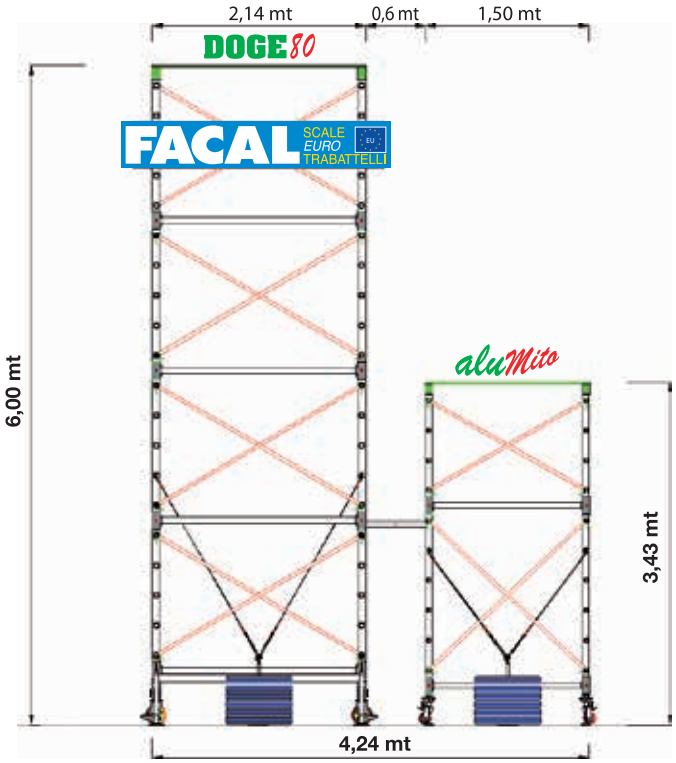

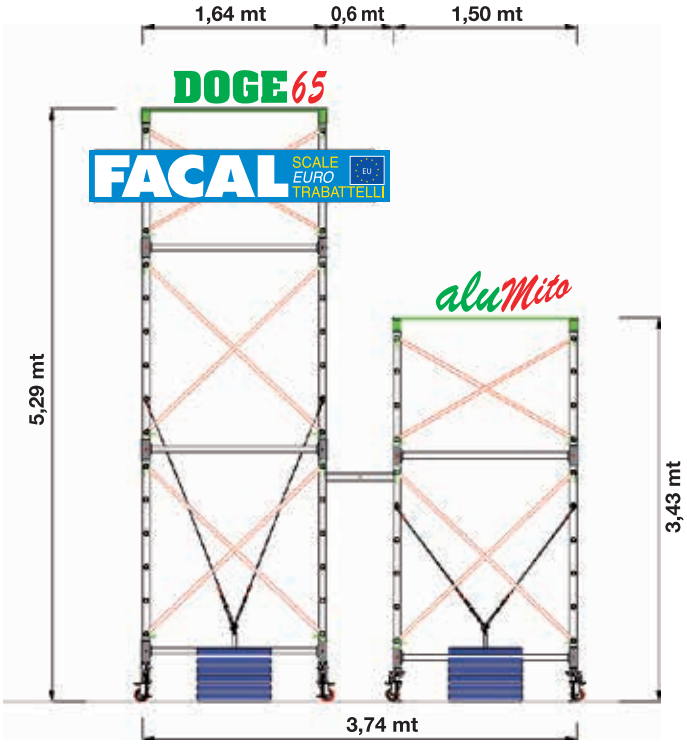

A/7 Proposal

CODE
DOGE 80 DG8/3C
ALUMITO AMST
SMALL STABILISERS D660
MAXI STABILISERS D809
LEVELLERS D802
PLATFORM WITH TRAPDOOR D806
DOGE 80 SAFETY KIT D803

A/8 Proposal

CODE
DOGE 65 DG6/3C
ALUMITO AMST
BIG STABILISERS D661
BIG STABILISERS D660
LEVELLERS D675
PLATFORM WITH TRAPDOOR D664
DOGE 65 SAFETY KIT D670

Pinna Stand

Composed by:
1 big step with115x30x30 cm
with logo
1 mascot

Code **EXPO/PN**

B TYPE

- Steel double-sided warehouse stand.

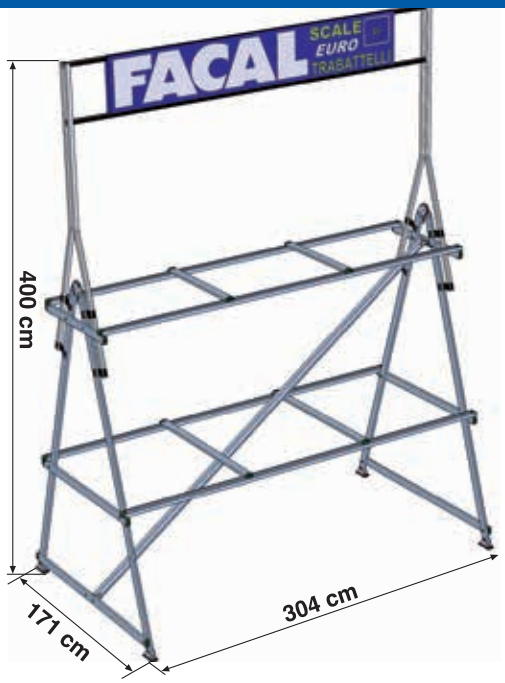

WITHOUT LADDERS

Code	(kg)	(m³)	N.	Codice Ean
EXPO/B	85	0,30	2	**8028406103387**

C TYPE

- It's composed by 4 ladders jointed through threaded bars, passing through the rungs holes.

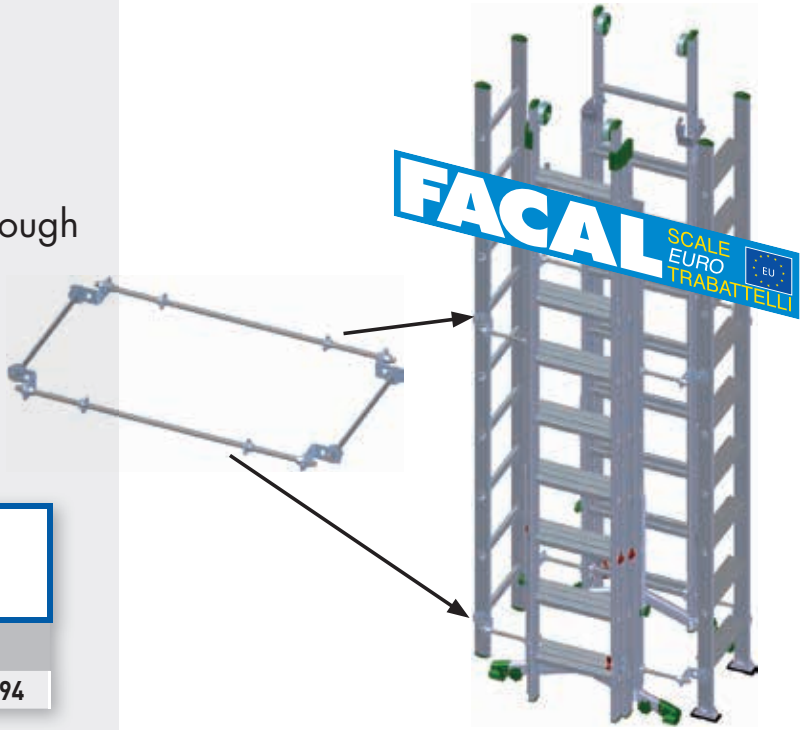

WITHOUT LADDERS

Code	(kg)	(m³)	N.	Codice Ean
EXPO/C	14,5	0,0018	1	**8028406103394**

Brico Type STAND

Code: **EXPO/BRI**
EAN: 8028406108023

Vertical ladder with safety cage

STAND

With graphics

Code: **EXPO/GA**
EAN: 8028406108016

EURO STILO /S STAND

- Easy assembling structure.
- Blue RAL 5002 painted wooden pallet.
- Metal perimeter cage.
- 4 angle brackets to fix the ladders holder to the pallet or to the floor.

Stand weight: 21 Kg
Total weight: 89 Kg
Volume: 1,28 m^3
Ladders n.: 16
Code: EXPO/STILO
EAN: 8028406106913

It contains 16 ladders + 5 hooks boxes

Pieces	Code	(mm)	rungs number	(cm)		(cm)	(kg)	(m^3)
2+1	SL-07	24x50	7	216	205	306	2,8	0,037
2	SL-08	24x50	8	246	230	336	3,1	0,042
2	SL-09	24x50	9	276	257	366	3,4	0,047
2	SL-10	24x60	10	306	286	396	4,4	0,052
2	SL-11	24x60	11	336	302	426	4,8	0,057
2	SL-12	24x60	12	366	338	456	5,4	0,062
2+1	SL-13	24x60	13	396	370	486	5,8	0,068
5 boxes	FE-119/A	light metal hook (2 pcs each box)						

ALUMITO graphics 69,4x92 cm

Code T/AL

DOGE 65 graphics 69,4x92 cm

Code T/D65

DOGE 80 graphics 69,4x92 cm

Code T/D80

PIEGO graphics 69,4x92 cm

Code T/PIE

CAPO-1 graphics 60x105 cm

Code T/C1

CAPO-2 graphics 60x105 cm

Code T/C2

CAPO-3 graphics 60x105 cm

Code T/C3

PINNA graphics 50x60 cm

Code T/PN

BRIKO graphics 69,4x92 cm

Code T/BK

EXPO BRICO graphics 65x120 cm

Code T/EB

BIG CUSTOMIZED GRAPHICS

Cod. TLO
For indoor/outdoor use:
3,00 x 1,00 m;
Packages: 1

EAN 8028406103400

One-side - 80 cm base

Code RL-001

One-side - 80 cm base

Code RL-002

One-side - 80 cm base

Code RL-003

One-side - 80 cm base

Code RL-004

One-side - 80 cm base

Code RL-005

One-side - 80 cm base

Code RL-006

One-side - 80 cm base

Code RL-007

LEANING LADDERS

COMBINATION LADDERS

ROPE-OPERATED EXTENSION LADDERS / EXTENSION LADDERS

TELESCOPIC LADDERS / MULTIPURPOSE LADDERS

STEPLADDERS / DOUBLE-SIDED STEPLADDERS / SPECIAL LADDERS

WAREHOUSE STEPS / SHELF LADDERS / WORK PLATFORMS / BRIDGING PLATFORMS / FOLDING WORK PLATFORMS

VERTICAL LADDER WITH SAFETY CAGE

ALUMINIUM ACCESS TOWERS / SCAFFOLDINGS

STEEL ACCESS TOWERS / SCAFFOLDINGS

STEP STOOLS / SAWHORSES

HOUSEHOLD STEPLADDERS

LOADING RAMPS / GANGWAYS

STANDS & GRAPHICS

ACCESSORIES AND SPARE PARTS

PRIMA/S - PRIMA/L

SMALL ARTICULATED FEET
Code PSP

BIG ARTICULATED FEET
Code PSG

ROLLER

BASE FEET 25x90 mm
Code PL329/A

SECOND/THIRD SECTION FEET 25x90 mm
Code PL328/A

BASE MECHANISM
Code FU-085/A

SECOND SECTION MECHANISM
Code FU-085/B

MECHANISM SUPPORT
Code FU-083

WALL WHEEL
Diameter : 100
Code PL-028/A

STRUMENTA/PROFESSIONAL 1

ALUMINIUM DIE CASTING HINGE
Code FU-074

TOOL HOOK
Code PL-047

RUBBER HANDLE
Colour: green
Code PL-046

DOUBLE INCLINED SHOE
Size: 24 x 60. Colour: green
Code PL-012/V

SAFETY STRAP
H 20 mm. L. 570 mm. (P1 6-7). Colour: blue
Code NA-019

SAFETY STRAP
H 20 mm. L. 870 mm. (P1 8-9-10-12).
Colour: blue
Code NA-020

SAFETY STRAP
H 30 mm. L. 540 mm. (P1V 6-7).
Colour: green
Code NA-021

SAFETY STRAP
H 30 mm. L. 840 mm. P1V 8-9-10-12).
Colour: green
Code NA-022

PLUG WITH HOLE FOR STRAP FASTENING (FIBREGLASS ONLY)
Colour: red
Code PL-321

CONICA

SMALL ARTICULATED FEET 55x120 mm
Code PSP

FIX TIP
Code PU-P65

ARTICULATED TIP
Code PU-P65/S

ARTICULATED RUBBER SHOE 16x11 mm
Code PS-O

HIGH SHOE
Colour: green
Code PL-073

AGRI

BACK TIE-ROD
Length: 600 mm (AG250/AG300)
Code PL-112

BACK TIE-ROD
Length: 840 mm (AG350/AG400)
Code PL-112/1

BACK TIE-ROD
Length: 1195 mm (AG450)
Code PL-112/2

BACK TIE-ROD
Length: 1595 mm (AG500)
Code PL-112/3

BACK TIE-ROD HOOK
Code PL-112/G

PLUG-IN FEET
(CLIMBING SIDE)
Size: 30 x 65. Colour: green
Code PL-084

HIGH GREEN SHOE (BACK SIDE POLE)
Code PL-061

STEEL HINGE
Code FE-012

"U"SHAPED SUPPORT FOR BACK SIDE POLE FASTENING
Code PL-113

BACK SIDE POLE WITH BASE SHOE (AG200)
Code AG-RE/20

BACK SIDE POLE WITH BASE SHOE (AG250)
Code AG-RE/25

BACK SIDE POLE WITH BASE SHOE (AG300)
Code AG-RE/30

BACK SIDE POLE WITH BASE SHOE (AG350)
Code AG-RE/35

BACK SIDE POLE WITH BASE SHOE (AG400)
Code AG-RE/40

BACK SIDE POLE WITH BASE SHOE (AG450)
Code AG-RE/45

BACK SIDE POLE WITH BASE SHOE (AG500)
Code AG-RE/50

SUPER PRIMA / VETROPRIMA

BASE ELEMENT ALUMINIUM DIE CASTING HINGE
Size: 25 x 65 right
Code FU-014

BASE ELEMENT ALUMINIUM DIE CASTING HINGE
Size: 25 x 65 left
Code FU-015

BASE ELEMENT ALUMINIUM DIE CASTING HINGE
Size: 25 x 80 right
Code FU-012

BASE ELEMENT ALUMINIUM DIE CASTING HINGE
Size: 25 x 80 left
Code FU-013

BASE ELEMENT ALUMINIUM DIE CASTING HINGE
Size: 25 x 90 right
Code FU-017

BASE ELEMENT ALUMINIUM DIE CASTING HINGE
Size: 25 x 90 left
Code FU-018

PAIR OF SLIDING BRACKETS
Size: 25 x 65. Coated steel
Code PL-023

PAIR OF SLIDING BRACKETS
Size: 25 x 80. Coated steel
Code PL-024

PAIR OF SLIDING BRACKETS
Size: 25 x 90. Coated steel
Code PL-025

RUBBER SHOE
FOR TELESCOPIC BAR
Code PL-021

EXPANSION SCREW
FOR SAFETY ANTI-SPLY BAR (Complete)
Code PL-030

EXPANSION SCREW FOR STABILISER BAR "PRIMA"
Colour: green
Code PL-031

PLUG-IN FEET "PRIMA" 25X65
Colour: green
Code PL-037

PLUG-IN FEET "PRIMA" 25X80
Colour: green
Code PL-039

PLUG-IN FEET "PRIMA"
Size: 25 x 90. Colour: green
Code PL-040

SECOND SECTION ANTI UNTHREADING STOP
Code PL-027

THIRD SECTION ANTI UNTHREADING STOP
Code PL-027/B

ANTI UNTHREADING HOOK FOR RUNG
Only the red nylon part
Code PL-026

RUNG ANTI-UNTHREADING PACK
Metal support+hook+spring
Code GA-ROPM

SAFETY HOOK
Steel
Code FE-038

WALL WHEEL
Size: 100
Code PL-028

SHOE "PRIMA"
Size: 25 x 65. Colour: green
Code PL-042

SHOE "PRIMA"
Size: 25 x 80. Colour: green
Code PL-041

PAIR OF SLIDING BRACKETS "VETROPRIMA"
Size: 25 x 65
Code PL-043

PAIR OF SLIDING BRACKETS "VETROPRIMA"
Size: 25 x 90
Code PL-045

ROPE SLIDING DEVICE
Size: 25 x 80
Code PL-057

ROPE SLIDING DEVICE
Size: 25 x 90
Code PL-058

TELESCOPIC STABILISER BAR "PRIMA"
Codes:
BA-TEL65 (25x65)
BA-TEL80 (25x80)
BA-TEL90 (25x90)

RIGHT SLIDING ELEMENT
Code BA-TEL/SCDX RIGHT

RIGHT SLIDING ELEMENT
Code BA-TEL/SCSX LEFT

PRINTED SLIDING PLATE FOR TELESCOPIC BAR
Code PIASTRINA -01

PRIMA ANTI-SPLAY BARS (SPECIFY MODEL)

Codes:
BA-P1195 (P350-P380-P420-P450)
BA-P840 (P290-P320)
BA-P600 (P210-P240-P260)

DAMA / GENIA

SPECIFY :
DAMA= Green
GENIA= Orange

STABILISER BAR "DAMA" - "GENIA"
Size: 77 cm (200 = 2/3 sections)
Code BA-F77

STABILISER BAR "DAMA" - "GENIA"
Size: 93 cm (260-290 = 2/3/4 sections)
Code BA-F93

STABILISER BAR "DAMA" - "GENIA"
Size: 114 cm (350-380 = 2/3/4 sections)
Code BA-F114

DAMA ANTI-SPLAY BAR
(D260 = 3/4 sections)
Code BA-D750

DAMA ANTI-SPLAY BAR
(D290 = 3/4 sections)
Code BA-D970

DAMA ANTI-SPLAY BAR
(D350/D380 = 2/3/4 sections)
Code BA-D1365

RUBBER SHOE FOR STABILISER BAR "DAMA" - "GENIA"
Code PL-128

SPECIFY:
DAMA= Green
GENIA= Orange

PLUG-IN FEET "GENIA"
Size: 25 x 65. Colour: Orange
Code PL-037/A

PLUG-IN FEET – GENIA
Size: 25 x 90. Colour: Orange
Code PL-040/A

SHOE-GENIA
Size: 25 x 65. Colour: Orange
Code PL-042/A

UPFOR PLUG-IN FEET – GENIA 3 SECTIONS
Size: 25 x 90. Colour: Orange
Code PL-324/A

BASE ALUMINIUM DIE CASTING HINGE "DAMA" - "GENIA"
Size: 25 x 65 right
Code FU-050

BASE ALUMINIUM DIE CASTING HINGE "DAMA" - "GENIA"
Size: 25 x 65 left
Code FU-051

SECOND SECTION ALUMINIUM DIE CASTING HINGE WITH PIVOT AND BRACKET "DAMA" - "GENIA"
Size: 25 x 65 right
Code FU-052

SECOND SECTION ALUMINIUM DIE CASTING HINGE WITH PIVOT AND BRACKET "DAMA" - "GENIA"
Size: 25 x 65 left
Code FU-053

THIRD SECTION ALUMINIUM DIE CASTING HINGE WITH WHEEL SUPPORT "DAMA" - "GENIA"
Size: 25 x 65 right
Code FU-054

THIRD SECTION ALUMINIUM DIE CASTING HINGE WITH WHEEL SUPPORT "DAMA" - "GENIA"
Size: 25 x 65 left
Code FU-055

SECOND SECTION ALUMINIUM DIE CASTING HINGE WITHOUT PIVOT AND BRACKET "DAMA" - "GENIA"
Size: 25 x 65 right
Code FU-056

SECOND SECTION ALUMINIUM DIE CASTING HINGE WITHOUT PIVOT AND BRACKET "DAMA" - "GENIA"
Size: 25 x 65 left
Code FU-057

BASE ALUMINIUM DIE CASTING HINGE "DAMA"
Size: 25 x 90 right
Code FU-060

BASE ALUMINIUM DIE CASTING HINGE "DAMA"
Size: 25 x 90 left
Code FU-061

SECOND SECTION ALUMINIUM DIE CASTING HINGE WITH PIVOT AND BRACKET "DAMA" - "GENIA"
Size: 25 x 90 right
Code FU-062

SECOND SECTION ALUMINIUM DIE CASTING HINGE WITH PIVOT AND BRACKET "DAMA" - "GENIA"
Size: 25 x 90 left
Code FU-063

THIRD SECTION ALUMINIUM DIE CASTING HINGE WITH WHEEL SUPPORT –"DAMA" - "GENIA"
Size: 25 x 90 right
Code FU-064

THIRD SECTION ALUMINIUM DIE CASTING HINGE WITH WHEEL SUPPORT –"DAMA" - "GENIA"
Size: 25 x 90 left
Code FU-065

SECOND SECTION ALUMINIUM DIE CASTING HINGE WITHOUT PIVOT AND BRACKET "DAMA"- "GENIA"
Size: 25 x 90 right
Code FU-066

SECOND SECTION ALUMINIUM DIE CASTING HINGE WITHOUT PIVOT AND BRACKET "DAMA"- "GENIA"
Size: 25 x 90 left
Code FU-067

SAFETY STRAP "DAMA" Green
H: 30 mm. L 2270 mm. (200 = 2 sections)
Colour: green
Code NA-015

SAFETY STRAP "DAMA" Green
H: 30 mm. L 2730 mm. (260 = 2 sections)
Colour: green
Code NA-016

SAFETY STRAP "DAMA" Green
H: 30 mm. L 3060 mm. (290 = 2 sections)
Colour: green
Code NA-017

SAFETY STRAP "GENIA" Orange
H: 30 mm. L 1130 mm. (250 = 2/3 sections)
Colour: Orange
Code NA-032

SAFETY STRAP "GENIA" Orange
H: 30 mm. L 1330 mm. (300 = 2/3 sections)
Colour: Orange
Code NA-033

SAFETY STRAP "GENIA" Orange
H: 30 mm. L 1720 mm. (350 = 2/3 sections)
Colour: Orange
Code NA-035

SAFETY STRAP "GENIA" Orange
H: 30 mm. L 1880 mm. (380 = 2/3 sections)
Colour: Orange
Code NA-036

HOBBY SEI / HOBBY DUE

STABILISER BAR
Size: 77 cm
Code BA-F77

QUADRA / DUPLA

TOOL TRAY Q50
Avail. Colours: black, green, orange (specify)
Code PL-006

TOOL TRAY Q60
Colour: black
Code PL-009

ALUMINIUM DIE CASTING PLATFORM – QUADRA
Code FU-009NT

FRONT SHOE "QUADRA"
Colour: black, green, orange (specify)
Size: 24 x 50 double slope
Code PL-014

FRONT-BACK SHOE "QUADRA"
Size: 24 x 50 mono slope
Code PL-015

FRONT-BACK SHOE – QUADRA
Size: 24 x 60 black
Code PL-012

BRASS/CLUTCH/PIN
Avail. Colours: black, green, orange (specify)
Code PL-001

"QUADRA" HINGE
Size: 24 x 50
Code FU-010

"QUADRA" HINGE
Size: 24 x 60
Code FU-011

DOUBLE SLOPE SHOE – WITH SPACER "DUPLA"
Colour: green
Code PL-051V

STILES SPACER
Colour: green
Code PL-054V

ALUMINIUM HINGE – LADDER AND STEPSTOOL "DUPLA"
Code FU-078

ANTI-SPLY BAR – STEP STOOL "DUPLA"
Code FE-098

CAP WITH HOLE – STEP STOOL "DUPLA" (SAFETY BAR FASTENING)
Size: 24 x 24
Code PL-130

MONOBLOC
Two hinges + platforms
Code DU-CEPI

SAFETY STRAP "QUADRA"
H: 20. L: 755 mm (5/6/7/8 treads). Colour: blue
Code NA-050

SAFETY STRAP "QUADRA"
H: 20. L: 1090 mm (9/10/11/12/13 gradini).
Colour: blue
Code NA-051

SAFETY STRAP "DUPLA"
H: 30. L: 640 mm (5/6 treads). Colour: green
Code NA-008

SAFETY STRAP "DUPLA"
H: 30. L: 820 mm (7/8/9 treads). Colour: green
Code NA-009

SAFETY STRAP "DUPLA"
H: 30. L: 1140 mm (10/12 treads). Colour: green
Code NA-010

ALUMINIUM HANDRAIL FOLDING SUPPORT "QUADRA"
Code FU-109

SAFETY HOOK FOR QUADRA PLATFORM + PIN
Colour: red
Code PL-315

DIVA

BASE ELEMENT WITH CASTORS "DIVA"
Code DI-TESTATA

LEVELLER "DIVA"
Code AMLV

RAILING "DIVA" (specify the model)
Code DIPAR-90

RAILING "DIVA" (specify the model)
Code DIPAR-120

TOE BOARD SUPPORT
Code FU-100

RAILING ADJUSTABLE JOINT
Code FU-101

ANTI-SPLAY BAR "DIVA" 90 FROM 2 TO 3 TREADS
Code BARRA2-3/90

ANTI-SPLAY BAR "DIVA" 90 FROM 4 TO 8 TREADS
Code BARRA4-8/90

ANTI-SPLAY BAR "DIVA" 120 FROM 2 TO 3 TREADS
Code BARRA2-3/120

ANTI-SPLAY BAR "DIVA" 120 FROM 4 TO 8 TREADS
Code BARRA4-8/120

ALFA

HINGE
Code FE-071

HANDLE
Code PL-095A

EUROBRIKO/BRIKO PLUS

PLUG-IN FEET FOR INTERNAL ELEMENTS
Colour: green, orange
Code PL-075

HIGH SHOE FOR EXTERNAL ELEMENTS
Colour: green, Orange
Code PL-073

RUNG LOCKING PIN "EUROBRIKO"
Code PL-072

HINGE LOCKING DEVICE "EUROBRIKO"
Code PL-074

COMPLETE HINGE "EUROBRIKO"
Code SNODOBK

RUNG COVER "EUROBRIKO" (GREEN)
Code PL-070

RUNG COVER "BRIKO PLUS" (ORANGE)
Code PL-070/A

RUNG CAP "EUROBRIKO" (GREEN)
Code PL-071

RUNG CAP "BRIKO PLUS" (ORANGE)
Code PL-071/A



ALUMINIUM AND STEINLESS STEEL RUNG LOCKING PIN "EUROBRIKO PLUS"
Code FU-104

AUTOMATIC STEEL HINGE "EUROBRIKO PLUS"
Code FE-069

SAFETY STRAP WITH SNAP-HOOK "EUROBRIKO"
H: 25. L: 570 mm
Code NA-BK1

SAFETY STRAP WITH SNAP-HOOK "EUROBRIKO"
H: 25. L: 735 mm
Code NA-BK1,5/2

SAFETY STRAP WITH SNAP-HOOK "EUROBRIKO"
H: 25. L: 950 mm
Code NA-BK3/4

SAFETY STRAP WITH SNAP-HOOK "EUROBRIKO"
H: 25. L: 1120 mm
Code NA-BK5

SAFETY STRAP WITH SNAP-HOOK "EUROBRIKO"
H: 25. L: 1220 mm
Code NA-BK6

CASTIGLIA



TREAD END ELEMENT – WITH SCREWS
Code CA-TGC DX
Code CA-TGC SX

Specify

CS4 ALUMINIUM DIE CASTING SINGLE U BOLT. UP TO CA6/225
Code FU-023

CS6 ALUMINIUM DIE CASTING DIAGONAL BRACE SUPPORT FROM CA7/250
Code FU-022

CS5 ALUMINIUM DIE CASTING DOUBLE U BOLT FOR DOUBLE DIAGONAL BRACE FROM CA7/250
Code FU-024

CS7 ALUMINIUM DIE CASTING PLATE FOR HANDLE FASTENING
Code FU-025

Ø 80 MM FRONT CASTOR WITH STEEL PIVOT AND SPRING
Code RU-010/P

Ø125 mm BACK CASTOR – WITH CARPENTRY AND SPRING
Code RU-008

ALUMINIUM DIE CASTING FRONT CASTOR SUPPORT- R (CASTOR-PIVOT AND SPRING NOT INCLUDED)
Code FU-070

ALUMINIUM DIE CASTING FRONT CASTOR SUPPORT- L (CASTOR-PIVOT AND SPRING NOT INCLUDED)
Code FU-071

ALUMINIUM BACK CASTOR SUPPORT – R – FOR Ø 125 MM CASTOR
Code FU-072

ALUMINIUM BACK CASTOR SUPPORT – L – FOR Ø 125 MM CASTOR
Code FU-073

HANDWHEEL FOR TOOL TRAY
Code PL-123

TOOL TRAY
Code CA-POR

RIGHT HANDLE WITH HINGE
Code CA-SNMA

LEFT HANDLE WITH HINGE
Code CA-SNMAS

CASTIGLIA HANDLE HINGE
Code CA-SN

HANDLE WITHOUT HINGE
Code CA-MA

RUBBER HANDLE COVER
Code PL-117

HANDLE CAP
Size: 30 x 50. Colour: green
Code PL-064V

UPFOR LANDING RAIL"CASTIGLIA"
Code CA-MAS

FRONT CASTOR PACK – R
(support + castor + spring)
Code CA-BRAD

FRONT CASTOR PACK – L
(support + castor + spring)
Code CA-BRAS

TREAD PACK
Code CA-BGC

TREAD WITHOUT ALUMINIUM DIE CASTING END ELEMENT
Code CA-ES006

ALUMINIUM FRONT HINGE – L "CASTIGLIA"
Code FU-019

ALUMINIUM FRONT HINGE – R "CASTIGLIA"
Code FU-020



BACK HINGE "CASTIGLIA"
Code FU-021

PLATFORM STEEL HINGE "CASTIGLIA"
Code FE-002

SAFETY SMALL CHAIN WITH CARABINER
Code CA-CT

PLATFORM WITHOUT HINGE "CASTIGLIA"
Code CA-PED

PLATFORM STEEL SUPPORT
Code FE-002

Ø 125 BACK CASTOR
Code RU-017

FORK WITH BRAKE
Code RU-018

DIAGONAL BRACES – I TYPE
The number after the brace identifies the platform size. Handle not included

Code CA-DI / 50-75-100-125-150-175-200

Code CA-DI / 225-250-275-300-325-350
Code CA-DI / 375-400-425-450-500

DIAGONAL BRACES – K TYPE
The number after the brace identifies the platform size

Code CA-DK /250-275-300-325-350
Code CA-DK / 375-400-425-450-500

PIERCED FRONT STILE
R/L - without ironware

Code CA-MONT / 50-75-100-125-150-175-200-225-250
Code CA-MONT / 275-300-325-350-375-400-425-450-500

WELDED BACK STRUCTURE
Without ironware

Code CA-RE / 50-75-100-125-150-175-200-225-250
Code CA-RE / 275-300-325-350-375-400-425-450-500

TOE BOARD AND PLATFORM CAP
Size: 18 x 150. Colour: green
Code PL-116

CASTÀ / PLATEA

TOOL TRAY - ORANGE
Code PL-017



ALUMINIUM DIE CASTING PLATFORM
Code FU-038

FOLDING HANDRAIL
Code CTA-MANIG

ALUMINIUM FOLDING HANDRAIL SUPPORT
Code CTA-SMANIG/DX right

ALUMINIUM FOLDING HANDRAIL SUPPORT
Code CTA-SMANIG/SX left

ADJUSTABLE STABILISER FOR CTA-4
Code CTA-STAB4
(Specify if left or right)

ADJUSTABLE STABILISER FOR CTA-5
Code CTA-STAB5
(Specify if left or right)

ADJUSTABLE STABILISER FOR CTA-6
Code CTA-STAB6
(Specify if left or right)

ADJUSTABLE STABILISER FOR CTA-7
Code CTA-STAB7
(Specify if left or right)

ADJUSTABLE STABILISER FOR CTA-8
Code CTA-STAB8
(Specify if left or right)

ADJUSTABLE STABILISER FOR CTA-9
Code CTA-STAB9
(Specify if left or right)

ADJUSTABLE STABILISER FOR CTA-10
Code CTA-STAB10
(Specify if left or right)

ADJUSTABLE STABILISER FOR CTA-11
Code CTA-STAB11
(Specify if left or right)

ANTI SPLAY BAR

LENGTH 860 mm CTA 4/5
Code CTA-COMP860

LENGTH 1050 mm CTA 6/7
Code CTA-COMP1050

LENGTH 1240 mm CTA 8/9
Code CTA-COMP1240

LENGTH 1450 mm CTA 10/11
Code CTA-COMP1450

STABILISER BAR WITH 2 CASTOR SUPPORT HINGES+2 CASTOR COVERS
(CASTOR SUPPORTS AND CASTORS NOT INCLUDED)

LENGTH 810 mm CTA 3/4/5/6
Code CTA-BARRA810

LENGTH 1055 mm CTA 7/8
Code CTA-BARRA1055

LENGTH 1265 mm CTA 9/10
Code CTA-BARRA1265

LENGTH 1385 mm CTA 11
Code CTA-BARRA1385

HANDRAIL 670 FOR CTA-4
WITHOUT SUPPORTS
Code CTA-MAN670

HANDRAIL 900 FOR CTA-5
WITHOUT SUPPORTS
Code CTA-MAN900

HANDRAIL 1150 FOR CTA-6
WITHOUT SUPPORTS
Code CTA-MAN1150

HANDRAIL 1410 FOR CTA-7
WITHOUT SUPPORTS
Code CTA-MAN1410

HANDRAIL 1680 FOR CTA-8
WITHOUT SUPPORTS
Code CTA-MAN1680

HANDRAIL 1920 FOR CTA-9
WITHOUT SUPPORTS
Code CTA-MAN1920

HANDRAIL 2150 FOR CTA-10
WITHOUT SUPPORTS
Code CTA-MAN2150

HANDRAIL 2400 FOR CTA-11
WITHOUT SUPPORTS
Code CTA-MAN2400

STEEL FRONT GUARDRAIL
Code CTA-PAR

ANTI SPLAY STRAP - CTA-3
Code NA-044



1-BACK CASTOR SUPPORT ALUMINIU DIE CASTING HINGE

RIGHT: **Code FU-203DX**

LEFT: **Code FU-203SX**

2-ALLUMINIUM DIE CASTING CASTOR COVER PLATE
Code FU-205

3-ALUMINIUM DIE CASTING STABILISER BAR SUPPORT FORK
Code FU-114/A

4-Ø 125 MM BACK CASTOR WITH BRAKE
Code RU-008

1-Ø 80 MM FRONT CASTORWITH STEEL PIVOT AND SPRING
Code RU-010/P

2-ALUMINIUM DIE CASTING FRONT CASTOR SUPPORT
Code FU-207

1-BACK SIDE WITH HINGES AND FORKS

CTA-3: **Code CTA-RE/3**
CTA-4: **Code CTA-RE/4**
CTA-5: **Code CTA-RE/5**
CTA-6: **Code CTA-RE/6**
CTA-7: **Code CTA-RE/7**
CTA-8: **Code CTA-RE/8**
CTA-9: **Code CTA-RE/9**
CTA-10: **Code CTA-RE/10**
CTA-11: **Code CTA-RE/11**

2-CLIMBING SIDE WITHOUT TOOL TRAY/ PLATFORM/CASTOR SUPPORTS

CTA-3: **Code CTA-ANT/3**
CTA-4: **Code CTA-ANT/4**
CTA-5: **Code CTA-ANT/5**
CTA-6: **Code CTA-ANT/6**
CTA-7: **Code CTA-ANT/7**
CTA-8: **Code CTA-ANT/8**
CTA-9: **Code CTA-ANT/9**
CTA-10: **Code CTA-ANT/10**
CTA-11: **Code CTA-ANT/11**

S/15

PAIR OF VERTICAL TOP HANDRAILS – S/15 WITH CLUTCHES
Code S15-MCVER

PAIR OF STANDARD TOP HANDRAILS – S/15 WITH VERTICAL CLUTCHES

Code S15-MCSTD

HANDRAIL STRAIGHT CLUTCH – S/15
Code FE-028



HANDRAIL VERTICAL CLUTCH – S/15
Code FE-028/B

WELDED STRENGTHENING – S/15 – FOR MAXI SIZES
Code S15/ES-013

BINARY

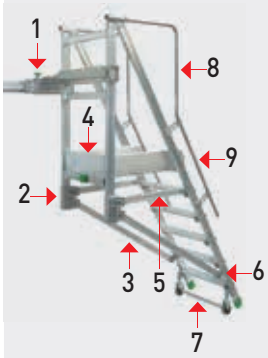

1- ALUMINIUM DIE CASTING CARRIAGE WITH HANDWHEELS AND BEARINGS
Cod. FU-124

HANDWHEEL WITH CARRIAGE CLUTCH
Cod. PL-333

2- BIG TWO-LANES ALUMINIUM DIE CASTING JOINT
Cod. FU-122

3- DIAGONAL BRACE (SPECIFY THE MODEL)
Cod. BY-DIAG

4- PLATFORM WITHOUT STEEL SUPPORT
Cod. CA-PED

PLATFORM STEEL SUPPORT
Cod. FE-002

5- HORIZONTAL BRACE WITH STEEL JOINT
Cod. BY-TRAV

6- SMALL ALUMINIUM DIE CASTING JOINT
Cod. FU-123

8- GUARDRAIL
Cod. CA-MAS

9- RAILING (SPECIFY THE MODEL)
Cod. MAN

FIX HANDRAIL SUPPORT
Cod. FU-016

WALL SPACER WITH WHEEL
Code FE-182

ALUMINIUM FRONT HINGE – LEFT
Code FU-019

ALUMINIUM FRONT HINGE – RIGHT
Code FU-020



ALUMINIUM BACK HINGE
Code FU-021

PLATFORM STEEL HINGE
Code FE-002

SAFETY SMALL CHAIN WITH CARABINER
Code CA-CT

1-Ø 80 MM FRONT CASTOR WITH STEEL PIVOT AND SPRING
Code RU-010/P

7- CASTOR JUNCTION TUBE
Code BY-COLL

2-ALUMINIUM DIE CASTING FRONT CASTOR SUPPORT
Code FU-207

SPAZIO

ZINC-PLATED HANDWHEEL FOR BASE ELEMENT "SPAZIO"
Code SPA-VOL

LEVELLERS HANDWHEEL
Colour: green
Code PL-031

BASE PACK CASTOR WITH BRAKE "SPAZIO"
Size: 200
Code RU-004

PLATFORM CLUTCHES "SPAZIO"
Code FE-016

BASE PACK HORIZONTAL BRACE
Code STRB

BASE ELEMENT WITH TWO CASTORS WITH BRAKE
Code STB

ADJUSTABLE LEVELLER
Code SL

125 CM LADDER FRAME (5 RUNGS)
Code SS1

65 CM LADDER FRAME (FOR END EXT. PACK – 3 RUNGS)
Code SS2

SIDE HORIZONTAL BRACE
Code ST

EXTENSION PACK DIAGONAL BRACE
Code SSA1

END EXTENSION PACK RED DIAGONAL BRACE
Code SSA2

RED END HANDRAILS
Code SMT

RED SIDE RUNG FOR END EXTENSION PACK
Code STT

BASE PACK DIAGONAL BRACE
Code SSB

RED VERTICAL TIE-ROD FOR EXTENSION PACK
Code STA

RED VERTICAL TIE-ROD FOR END EXTENSION PACK
Code STI

PONY

PAIR OF WOODEN PLATFORMS
Code LE-002
Pair of diagonal braces
HANDRAIL
LADDER FRAME WITHOUT CASTORS
LADDER FRAME WITH CASTORS

MITO

100 CM SIDE LADDER FRAME
Code S100/M

200 CM SIDE LADDER FRAME
Code S200/M

BASE ELEMENT WITH CASTORS
Code BCR/M

HORIZONTAL BRACE WITH 4 DIAGONAL BRACES
Code TRV/M

STABILISER
Code STB/M

LEVELLER
Code AMLV

BASE PACK CASTOR WITH BRAKE - "MITO"
Size: 125
Code RU-013

END HANDRAIL WITH DIAGONAL BRACES
Code MT/M

SAFETY GUARDRAIL
Code RP/M

TWO PAINTED WOODEN PLATFORMS PACKS
Code PLSL/M

ADJUSTABLE STAIRWELL DEVICE
Code ELZ/M

RED DIAGONAL BRACE
Code MI SAETTA

LEVELLERS HANDWHEEL
Colour: green
Code PL-031

SAFETY GUARDRAIL HANDWHEEL
Code PL-120

ALUMITO / ALUMAXI

BASE ELEMENT WITH CASTORS
Code AMTB

LEVELLER
Code AMLV

SIDE HORIZONTAL BRACE
Code AMTL

4 RUNGS LADDER FRAME
H 1200 mm
Code AMSP-4

6 RUNGS LADDER FRAME
H 1800 mm
Code AMSP-6

DIAGONAL BRACE – 1750 MM
For extension pack – 1200 mm
Code AMS-17

DIAGONAL BRACE – 2100 MM
For extension pack – 1800 mm
Code AMS-21

END HANDRAIL
Code AM-MA

CASTOR WITH BRAKE
Size: 125
Code RU-013

HORIZONTAL BRACE ALUMINIUM DIE CASTING
CROSS VAULT JOINT
Including pin
Code D674-C

CROSS VAULT SPRING PIN
Colour: green
Code PL-064

PLASTIC PIECE FOR DIAGONAL BRACE FASTENING
Code PL-306L

STABILISER CLAMP – WITH HANDWHEELS
Code D672

CLAMP HANDWHEEL
Code PL-312

LEVELLER HANDWHEEL
Code PL-031

PINNA/PINNA CLIC/ PINNA CLIC•CLAC

WORKING PLATFORM
Code PIAN-PN

DIAGONAL BRACE WITH 2 LEVERS
Code PN-SAET1555



HORIZONTAL BRACE WITH 2 LEVERS
Code PN-SAET1440

1-STABILISER BAR WITH 2 RUBBER SHOES
Code BA-PN1207

2-LADDER FRAME WITH EXTENSION + 2 HINGES
Code PN-FIAN

Specify if with or without castors holes

ALUMINIUM DIE CASTING HINGE
Code SNODOPN



1-STEEL LIFTING CASTOR SUPPORT

RIGHT: **Code FE-177/DX**
LEFT: **Code FE-177/SX**

Ø 125 MM BLACK RUBBER CASTOR
Code RU-035

STABILISER BAR NYLON FORK
Code PL-133/Blue

STEEL SAFETY PIN (CLIC/CLIC•CLAC)
Code PL-344

STEEL COATED JOINT (CLIC/CLIC•CLAC)
Code PL-143

1- S6 RUNGS BASE LADDER FRAME (CLIC / CLIC•CLAC)
Code PN-CLI/SPB

2 -6 RUNG EXTENSION PACK LADDER FRAME (CLIC / CLIC•CLAC)
Code PN-CLI/SPA

3 -7 RUNGS ETENSION PACK LADDER FRAME (CLIC•CLAC)
Code PN-CLI/PRO

7 RUNGS ETENSION PACK LADDER FRAME (CLIC / CLIC•CLAC)
Code FE-188

ADJUSTABLE STABILISER (CLIC•CLAC)
Code PN-STAB

PENNY

LADDER FRAME
Code PE-SPA

TOOL TRAY
Code PL-350

Ø -90 MM CASTOR
Code RU-036

WORKING PALTFORM WITH 2 DIAGONAL BRACES
Code PE-PIAN

DIAGONAL BRACE
Code PE-DIAG

STABILISER BAR
Code PE-BARRA

CASTOR SUPPORT WITH CASTOR
Code FE-192

NYLON HOOK FOR PLATFORM FASTENING WITHOUT SAFETY STOP
Code PL-346

STEEL SAFETY STOP FOR NYLON HOOK
Code FE-220

TANO

4 RUNGS LADDER FRAME WITH CASTORS
Code TA-SPCR

5 RUNGS LADDER FRAME WITHOUT CASTORS
Code TA-SPSR

HORIZONTAL BRACE 1400 MM
Code TA-TRO

DIAGONAL BRACE 1650 MM
Code TA-TRD

NYLON HANDWHEEL
Code PL-031

GREEN STABILISER
Code TA-STBV

WOODEN TOOL TRAY SHELF
Code TA-ME

WOODEN PLATFORM
Code LE-012

HANDWHEEL NOG
Code PL-309

PLUG-IN FEET WITH HOLE 25X65 MM
Code PL-303

PLUG-IN FEET 25X65 MM
Code PL-037

ESTRO

LADDER FRAME WITH CASTORS
Code ES-SP

END HANDRAIL
Code PI-MA

BASE ELEMENT HORIZONTAL BRACE
Code ES-TR

DIAGONAL BRACE
Code ES-SA

CASTOR WITH BRAKE
Code RU-027

CASTOR WITHOUT BRAKE
Code RU-029

PLATFORM
Code ES-TA

TWO STABILISER WITH CLAMPS
Code AMZP

PLASTIC PIECE FOR DIAGONAL BRACE FASTENING
Code PL-306

PIEGO

STRUCTURE WITH CASTORS
Code PI-ST

2 PLATFORMS PACK
Code LE-001

DIAGONAL BRACE
Code PI-SA

END HANDRAIL
Code PI-MA

Ø 125 MM CASTOR WITH BRAKE
Code RU-013

ACCESSORIES BAG
Code SA-001

DOGE/65

Ø 150 MM CASTOR WITH BRAKE
Code RU-025

CASTOR SUPPORT BLOCK
Code FU-026

COATED STEEL JOINT
Code PL-300

HORIZONTAL BRACE DIE CASTING CROSS VAULT JOINT INCLUDING PINS
Code D674-C

CROSS VAULT SPRING PIN
Code PL-064

LADDER FRAME PLASTIC PIECE
Code PL-306/L

DIAGONAL BRACE STAINLESS STEEL SPRING
Code PL-307

SIMPLE SAFETY RAILING
Code D679-S

SAFETY RAILING WITH ADDITIONAL STOREY
Code D679-P

STABILISER CLAMP WITH HANDWHEEL
Code D672

CLAMP HANDWHEEL
Code PL-312

LEVELLER HANDWHEEL
Code PL-031

SAFETY HOOK
Code FU-032

WORKING PLATFORM SUPPORT HOOK
Code D6/ES-109

STABILISER GREEN SHOE Ø 50 MM
Code PL-301

STABILISER GREEN PLUG-IN CAP Ø 520 MM
Code PL-219

DOGE/80

Ø 200 MM CASTOR WITH BRAKE
Code RU-034

CASTOR SUPPORT BLOCK
Code FU-045

COATED STEEL JOINT
Code PL-320

HORIZONTAL BRACE DIE CASTING CROSS VAULT JOINT INCLUDING PINS
Code D823

CROSS VAULT SPRING PIN
Code PL-064

LADDER FRAME PLASTIC PIECE
Code PL-299

DIAGONAL BRACE STAINLESS STEEL SPRING
Code PL-307

SIMPLE SAFETY RAILING
Code D826

SAFETY RAILING WITH ADDITIONAL STOREY
Code D827

STABILISER CLAMP WITH HANDWHEEL
Code D828

CLAMP HANDWHEEL
Code PL-312

LEVELLER HANDWHEEL
Code PL-031

SAFETY HOOK
Code FU-032

WORKING PLATFORM SUPPORT HOOK
Code D6/ES-112

STABILISER GREEN SHOE Ø 50 MM
Code PL-301

STABILISER GREEN PLUG-IN CAP Ø 520 MM
Code PL-219

EURODOMUS

ORANGE PLATFORM
Code FE-194/A

BLACK PLATFORM
Code FE-194/N

FRONT SHOE – ORANGE 40X20 MM
Code PL-356/A

FRONT SHOE – BLACK 40X20 mm
Code PL-356/N

BACK SHOE – ORANGE 40X20 mm
Code PL-357/A

BACK SHOE – BLACK 40X20 mm
Code PL-357/N

ORANGE TOOL TRAY – PLUS
Code PL-358/A

BLACK TOOL TRAY – PLUS
Code PL-358/N

LEFT TREAD CAP – ORANGE
Code PL-359/A-SX

RIGHT TREAD CAP – ORANGE
Code PL-359/A-DX

LEFT TREAD CAP – BLACK
Code PL-359/N-SX

RIGHT TREAD CAP – BLACK
Code PL-359/N-DX

ORANGE SAFETY STRAP
680 mm 5/6/7 treads
Code NA-055/A

ORANGE SAFETY STRAP
1090 mm – 8 treads
Code NA-056/A

BLACK SAFETY STRAP
680 mm – 5/6/7 treads
Code NA-055/N

BLACK SAFETY STRAP
1090 mm – 5/6/7 treads
Code NA-056/N

COLORETTE

FRONT SHOE 35X20 mm BLACK
Code PL-360/N

FRONT SHOE 35X20 mm ORANGE
Code PL-360/A

FRONT-BACK SHOE 30X20 mm BLACK
Code PL-361/N

FRONT-BACK SHOE 30X20 mm ORANGE
Code PL-361/A

BLACK SAFETY STRAP
620 mm – 5/6/7/8 treads
Code NA-057/N

ORANGE SAFETY STRAP
620 mm – 5/6/7/8 treads
Code NA-057/A

TINTO / TONTO



BLACK PLASTIC PLATFORM TONTO
Code PL-371

GREY TREAD WITH BLACK PLASTIC
Code FE-217

WHITE TREAD WITH BLACK PLASTIC
Code FE-218

BLACK ANGULAR BACK SHOE
Code PL-370

BLACK FRONT SHOE TONTO
Code PL-369

ZINC-PLATED HINGE TONTO
Code PL-368

ORANGE HINGE TONTO
Code FE-219

ORANGE HINGE – TINTO
Code PL-367

SHINY BLACK TREAD – TINTO
Code FE-216

DIAGONAL BRACES (TINTO 3)
Code FE-215

ORANGE TREAD SPACER – TINTO
Code PL-366

ORANGE FRONT SHOE – TINTO 20X30 mm
Code PL-365

ORANGE ANGULAR BACK SHOE TINTO
Code PL-364

ORANGE BACK SHOE – TINTO 4
Code 372

OTHER GENERIC SPARE PARTS

UNIVERSAL STANDOFF
Code APP

UNEVEN GROUND PINS
Size: 25x65 (pair)
Code PU-P65

UNEVEN GROUND PINS
Size: 25 x 80 (pair)
Code PU-P80

CLAMP WITH CHAINSAW COVER FOR SAWHORSE
Code CAV-M

ALUMINIUM SAWHORSE HINGE
Code FU-200

ALUMINIUM SAWHORSE SAFETY BAR
Code FE-054

BLOCK WITH HOLE FOR SAFETY BAR FASTENING (CAV/A)
Colour: green
Code PL-317

CHAINSAW COVER FOR SAWHORSE (CAV/C)
Code FE-033

SHOE Ø 30 mm
(PLANO/PLANO MAXI/RIGOLO)
Code PL-327

INACTIVE CASTOR Ø 90 mm
RIGOLO PLUS AND PALCO
Code RU-036

INACTIVE CASTOR Ø 90 mm WITH SUPPORT
RIGOLO PLUS AND PALCO
Code FE-192/1

PLATFORM GREEN CAP – 20X80 mm
FOR ALUMINIUM SAWHORSE
Code PL-104

Notes

Notes

Notes

OUR HEADQUARTERS

Scala semplice d'appoggio
"PRIMA"
...tecnologia avanzata

"tecnoscala"
QUADRA Picta
...L'emozione del colore

SECURITY SYSTEM
...protezione in quota

SCALA PIEGHEVOLE
HOBBY·DUE
...ricerca di solide posizioni

"tecnoscala"
QUADRA
...Qualcosa che vale nel tempo

SCALA DA LAVORO
PLATEA
... programma sicurezza

Le forme ...in movimento
Pinna

Pinna
Clic·Clac

Doppia Scala
"DUPLA"
...Evoluzione Professionale

Super Scala
VETROPRIMA
...TECNOLOGIA AVANZATA

Casta
...Prestigiosa Praticità

COLORETTE
L'accecco depunto

scala universale
euro
BRIKO
...il valore della qualità

CONICA

PEDANA PIEGHEVOLE
ALFA

DUMBY-ALU-SYSTEM
PASSERELLE & CAMMINAMENTI

EURO TRABATTELLO
"PIEGO"
...tecnologie e design

Scala da Lavoro
Professional 1
... Semplici forme affidabili per tradizione

TERMO
...L'amico sicuro

TRABATTELLO
Moto

EURO TRABATTELLO
aluMito
...tecnologie e design

BINARY
...in movimento

Sgabello
"DUPLA"
...Evoluzione Professionale

KARGO-ALU-SYSTEM
RAMPE di carico

EUROSCALA
GENIA

Scala a rotaia con fune
ROLLER

EURO TRABATTELLO
CAPO-1

"TAGLIALEGNA"

EURO
STILO

"Scala Professionale"
STRUMENTA
... Attuali tecnologie del futuro

EURO TRABATTELLO
CAPO-2

EURODOMUS
...Profumo di Casa

EURO TRABATTELLO
CAPO-3

Euro Scala
DAMA
...qualità certificata

MASTER PRO

EURO TRABATTELLO
DOGE65
...tecnologie e design

Pinna
Clic

EURO TRABATTELLO
DOGE80
...tecnologie e design

Serie
"AGRI"
...Scale per Agricoltura

scala universale
BRIKO PLUS

Cava

TRABATTELLO IN ALLUMINIO
Tano
...l'amico di casa

Vetroscala da Lavoro
VetroProf 1
... Per Protezione Elettrica

SPECIAL
"PIEGO"
...tecnologie e design

Tinto

PENNY
...mon ami

SCALA MULTIPOSIZIONI
HOBBY SEI
...per servire si fa in quattro

EURO TRABATTELLO
"ESTRO"
...tecnologie e design

PROGRAMMA
S15/2
System

Super Scala
"PRIMA"
...tecnologia avanzata

SCALA A CASTELLO IN ALLUMINIO
CASTIGLIA
...La Sicurezza per tradizione

Zinko

TRABATTELLO
FIERO
... l'amico di ferro

SCALA A PONTE
DIVA

Tecnici
...Quelli Saldati

PROGRAMMA
S15/1
System

Tonto

PLIO
...Logica di Stabilità

"PITTORE"
...l'amico di legno

Trabattello
SPAZIO

TRABATTELLO
PONY
...e il tuo lavoro corre

FACAL

Via G. Di Vittorio, 42 - 46045 Marmirolo
Zona Industriale - Mantova (Italy)
Tel. +39 0376 467893 - Fax +39 0376 467894
www.facalscale.it - info@facalscale.it